

REPORT


50 Series



finder[®]

SWITCH TO THE FUTURE

NEW



Approvals (according to type)



Relays with forcibly guided contacts for safety applications

Type 50.14 and Type 50.16

Relays 4 and 6 forcibly guided contacts low profile for safety applications. For printed circuit mounting.

According to:
EN 61810-3 Class A
(previously EN 50205).

Features

- 4 or 6 contacts 8A
- Cadmium free contact materials
- Nominal coil power 800 mW
- Contact material: AgSnO₂ or AgSnO₂ + Au (according to type)
- Wash tight: RT III
- Printed circuit mount

- ✓ Forcibly guided contacts ensure reliability
- ✓ According to EN 61810-3 Class A (previously EN 50205)



Applications

- Machine tools
- Elevator industry
- Security Modules
- Safety barriers
- Railway applications




Type 50.14

- 4 contacts 8 A
- Nominal voltage: 12 - 24 - 48 - 110 V DC
- Coil power 800 mW
- Contact material AgSnO₂
- Wash tight: RT III

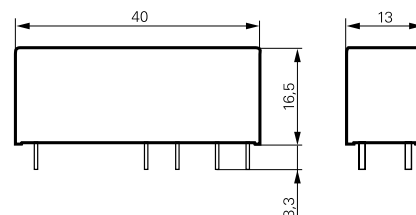



Type 50.14.9.xxx.4220

2 contacts NO + 2 contacts NC





Type 50.14.9.xxx.4310

3 contacts NO + 1 contact NC





Type 50.16

- 6 contacts 8 A
- Nominal voltage: 12 - 24 - 48 - 110 V DC
- Coil power 800 mW
- Contact material AgSnO₂ + Au
- Wash tight: RT III

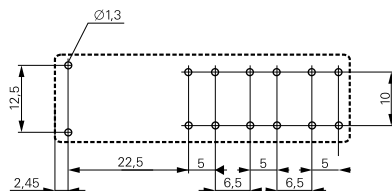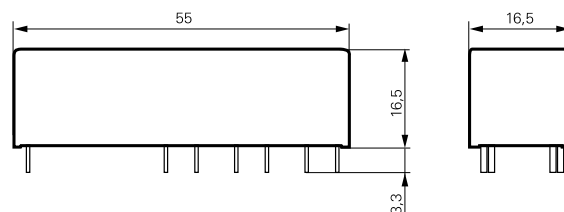

Type 50.16.9.xxx.5420

4 contacts NO + 2 contacts NC

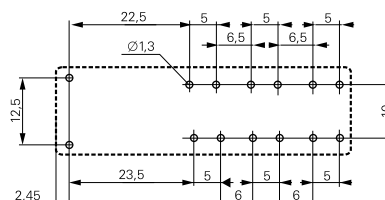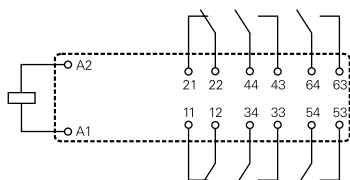

Type 50.16.9.xxx.5510

5 contacts NO + 1 contact NC

