

SELECTION GUIDE



Timers





80 Series - Multi-function and mono-function modular timers

- “PWM clever” technology for automatic recognition and regulation of the supply voltage, resulting in a wide nominal voltage range of 12 to 240 V AC or (non-polarised) DC
- Rated current up to 16 A; a version with 1 A SSR output is also available
- Six time scales from 0.1s to 24h
- High input/output isolation
- “Blade + cross” - both flat blade and crosshead screwdrivers can be used on rotary selectors and terminals



81 Series - Modular timers with start and reset function

- Multi-function (7 functions, 4 with supply start and 3 with control signal)
- Reset function
- “PWM clever” technology for automatic recognition and regulation of the supply voltage, resulting in a wide nominal voltage range of 12 to 240 V AC or (non-polarised) DC
- DIP switch for time and function controls
- Nominal current 16 A
- Six time scales from 0.1s to 10h



83 Series - Modular timers 22.5 mm, multi-function and mono-function types available

- “PWM clever” technology for automatic recognition of and regulation of the supply voltage, resulting in a wide nominal voltage range of 12 to 240 V AC or (non-polarised) DC
- Rated current up to 16 A
- Versions available with: 2 timed contacts, or 1 timed contact + 1 instantaneous contact: adjustable timing by means of an external potentiometer
- Eight time scales from 0.05s to 10 days
- High input/output isolation



84 Series - SMARTimer, digital multi-function modular timer

- Two programming modes (via Smartphone with NFC technology or via joystick)
- Wide backlit LCD display
- Multi-function (the 30 functions for each channel can be combined between the two channels to create new functions)
- High precision and flexibility, adjustable in tenths of a second, seconds, minutes, hours
- 2 CO 16 A output contacts
- Two supply versions available: 12...24 V AC/DC or 110...240 V AC/DC



85 Series - Multifunctions Miniature plug-in timers. Plug-in for use with 94 series sockets

- AC/DC supply non polarized
- Seven time scales from 0.05s to 100h
- Contacts with rated current up to 10 A
- 2, 3 or 4 changeover contacts



86 Series - Plug-in Timer modules for use with relay & socket

- Wide supply voltage range
- Seven time scales from 0.05s to 100h
- LED indication



88 Series - Plug-in or panel mount timers

- Multi-function or Mono-function
- 8 or 11 pins for use with 90 series sockets
- Time scales from 0.05s to 100h
- Wide supply voltage range
- Versions available: 2 timed contacts or 1 timed contact + 1 instantaneous contact



93 Series - Multi-function slim timed sockets for 34 series relays

- 6.2 mm wide
- EMR and SSR: 12 to 24 V AC/DC supply
- DIP-switch for selection of 4 time scales (from 0.1 s to 6 h) and 8 functions
- LED indication



85 Series - Multifunctions Miniature plug-in timers
Plug-in for use with 94 series sockets

Compatible with all 94 series sockets



88 Series - Plug-in timers

Compatible with all 90 series sockets



86 Series - Plug-in Timer modules for use with relay & socket

Type 86.00

Compatible with the following socket types:

- 90.02, 90.03
- 92.03
- 96.04

Type 86.30

Compatible with the following socket types:

- 90.02, 90.03
- 92.03
- 96.02, 96.04
- 94.02, 94.03, 94.04, 94.54, 94.P3, 94.P4
- 97.01, 97.02, 97.51, 97.52, 97.P1, 97.P2
- 95.03, 95.05, 95.55, 95.P3, 95.P5



93 Series - Multi-function slim timed sockets for 34 series relays

Timer socket 93.21

with relay, comprises the following interface

- 38.21 (SSR / EMR)
- Dual screw head (blade + cross) terminals

Timer socket 93.68


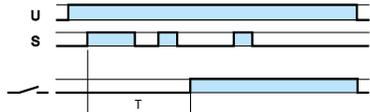

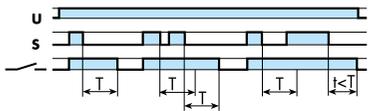
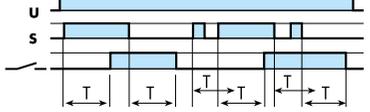
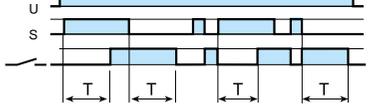
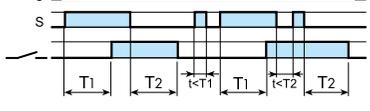

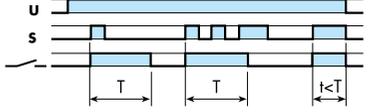
with relay, comprises the following interfaces

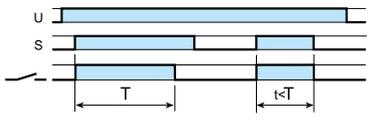
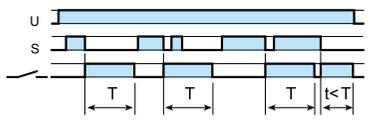
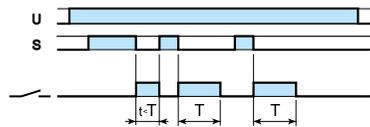
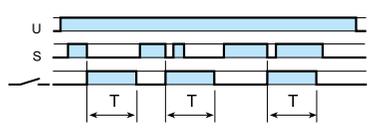
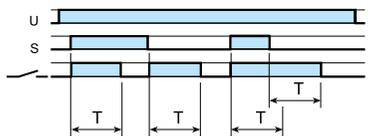
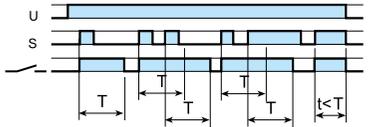
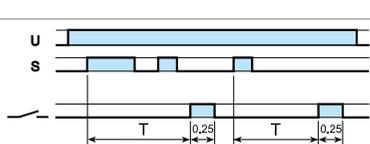
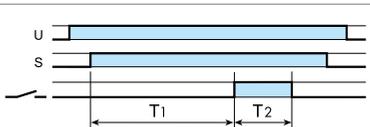
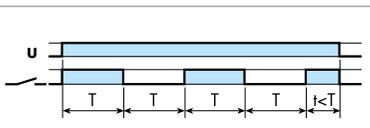
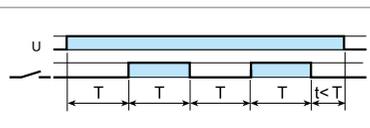
- 39.81 (EMR) - Dual screw head (blade + cross) terminals
- 39.80 (SSR) - Dual screw head (blade + cross) terminals








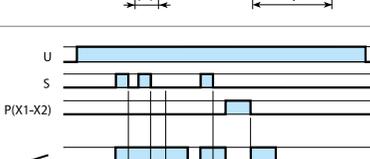
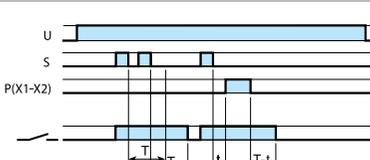
Timer socket 93.69

with relay, comprise the following interfaces

- 39.91 (EMR) - Push-in terminals
- 39.90 (SSR) - Push-in terminals

FUNCTIONS			80 SERIES	81 SERIES	83 SERIES	84 SERIES	85 SERIES	86 SERIES	88 SERIES	93 SERIES
AI	On-delay		80.01 80.11 80.71	81.01	83.01 83.02 83.11	84.02	85.02 85.03 85.04	86.00 86.30	88.02	93.21 93.68 93.69
AE	On-delay with control signal				83.52	84.02				
AC	On-delay with maintained control signal					84.02				
BI	Power off-delay (True off-delay)		80.61		83.62					
BE	Off-delay with control signal		80.01 80.41 80.71	81.01	83.01 83.02 83.41	84.02		86.00	88.02	93.68 93.69
CE	On- and off-delay with control signal		80.01 80.71		83.01 83.02			86.00		93.68 93.69
CEa	On- and off-delay with control signal								88.02	
CEb	On and off independent delays with control signal					84.02				
DI	Interval		80.01 80.21 80.71	81.01	83.01 83.02 83.21	84.02	85.02 85.03 85.04	86.00 86.30	88.02	93.21 93.68 93.69
DE	Interval with control signal on		80.01 80.71	81.01	83.01 83.02	84.02		86.00	88.02	93.68 93.69

DC	Interval with maintained control signal					84.02				
EE	Interval with control signal off					84.02		86.00		93.68 93.69
EEa	Interval with control signal off (retriggerable)				83.52	84.02				
EEb	Interval with control signal off			81.01		84.02				
FE	Interval with control signal on and off				83.52	84.02		86.00		
WD	Watchdog (retriggerable interval with control signal on)				83.01 83.02	84.02				
GI	Pulse delayed				83.01 83.02	84.02	85.02 85.03 85.04		88.02 88.12	93.21 93.68 93.69
GE	Pulse delayed with control signal on				83.52	84.02				
GC	Pulse delayed with maintained control signal					84.02				
SW	Symmetrical flasher (starting pulse on)		80.01 80.71	81.01	83.01 83.02	84.02	85.02 85.03 85.04	86.00	88.12	93.21 93.68 93.69
SP	Symmetrical flasher (starting pulse off)			81.01		84.02			88.02	

LI	Asymmetrical flasher (starting pulse on)		80.91		83.91	84.02			88.92.0001
LE	Asymmetrical flasher (starting pulse on) with control signal		80.91		83.91	84.02			
LC	Asymmetrical flasher (starting pulse on) with maintained control signal					84.02			
PI	Asymmetrical flasher (starting pulse off)				83.91	84.02			88.92.0000
PE	Asymmetrical flasher (starting pulse off) with control signal				83.91	84.02			
PC	Asymmetrical flasher (starting pulse off) with maintained control signal					84.02			
SD	Star-delta		80.82		83.82	84.02*			
IT	Timing step				83.52	84.02			
SHp	“Shower” (off-delay with control signal and pause signal)				83.52	84.02			
BEp	Off-delay with control signal and pause signal				83.52	84.02			

DEp	Interval with control signal on and pause signal				83.52	84.02				
Ala	On-delay (2 timed contacts)					84.02*			88.12	
Alb	On-delay (1 timed contact + 1 instantaneous contact).					84.02*			88.12	
Dla	Interval (2 timed contacts)					84.02*			88.12	
Dlb	Interval (1 timed contact + 1 instantaneous contact)					84.02*			88.12	
OFF	Relay OFF The output contact stays permanently open					84.02				
ON	Relay ON The output contact stays permanently closed					84.02				
SS	Monostable controlled by Signal switch The output contact follows the status of Signal Switch (S)					84.02				
PS	Monostable controlled by Pause switch. The output contact follows the status of Pause Switch (P)					84.02				

* Achievable by combining basic functions