

REPORT

ATEX products

**finder®**

SWITCH TO THE FUTURE



ATEX compliant relays


NEW

New versions of ATEX Compliant 39 Series and 58 Series relay interface modules and 66 Series relays.

Special versions for zone 2 installations with presence of GAS.

APPLICATIONS

- Chemical, petrochemical and pharmaceutical plants
- Gas stations, garages and underground areas
- Spray booths (liquid)
- Gas power plants
- LPG depositories

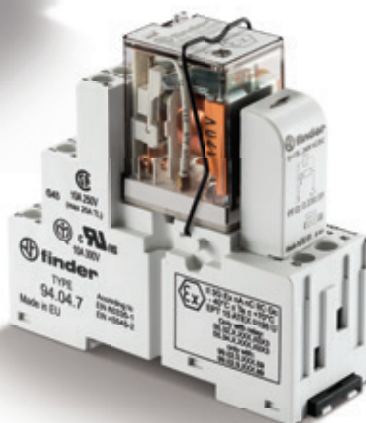


39 Series



- Certification: EPT 15 ATEX 0194 U**
- 1 CO 6 A
 - Nominal voltage: from 6 to 240 V AC/DC
from 6 to 24 V DC
230 V AC
 - Integral coil indication
 - Multivoltage version
 - Screw terminal and Push-in terminal

58 Series



- Certification: EPT 15 ATEX 0195 U**
- 2, 3 or 4 CO - 10, 9 and 6 A
 - Nominal voltage: from 12 to 125 V DC
from 12 to 230 V AC
 - Supply status indication as standard
 - Screw terminal

66 Series



- Certification: EUT 14 ATEX 0150 U**
- 2 CO or 2 NO 25 A
 - Nominal voltage: from 6 to 240 V AC
from 6 to 125 V DC
 - PCB mount or Flange mount (Faston 250)

Complies with: EN 60079-0:2012; EN 60079-15:2010; 94/9/CE; 2014/34/UE.



MARKING	
	Specific marking of explosion protection
II	Component for surface plant (different from mines)
3	Category 3: normal level of protection
GAS	G Explosive atmosphere due to presence of combustible gas vapour or mist
	Ex nA (39 and 58 Series only) Non-sparking equipment
	Ex nC Sealed device (type of protection for category 3G)
	IIC Gas group
	Gc Equipment Protection Level
-40 °C ≤ Ta ≤ +70 °C Ambient temperature	

FINDER reserves the right to alter characteristics at any time without notice. FINDER assumes no liability for damage to persons or property caused as a result of the incorrect use or application of its products.