



**OSG**  **PHOENIX**®


**综合样本 2019**

Catalog 2019

**OSG Corporation**

# 钻头加工

Drilling

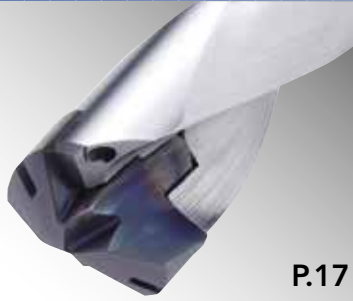

P.17  
**PXD**

可换头式钻头 3D/5D  
Exchangeable Head Drill 3D/5D



New  
Size  
New  
Insert

P.33  
**PD**

可转位式钻头 2D/3D/4D/5D  
Indexable Drill 2D/3D/4D/5D



P.53  
**PHP**

可转位式钻头 3D  
Indexable Drill 3D



P.59  
**PZAG**

沉孔钻头  
Counterboring Cutter

**NEW**

# INDEX



P.101  
**PSEL**

玉米铣刀  
Roughing End Mill



P.143  
**PDR**

高进给圆弧角铣刀  
High Feed Radius Cutter



P.151  
**PFAL**

铝材用精加工铣刀  
Finishing Cutter for Aluminum



P.161  
**PFB**

精加工用球头铣刀  
Finishing Ball End Mill

New  
Insert

## 铣刀加工 Milling



**P.65**  
**PAS**  
方形刀片面铣刀  
45° Face Milling Square Insert Type



**P.69**  
**PAO**  
45度角面铣刀  
45° Face Milling Octagon Insert Type



**P.75**  
**PSF**  
四角刀片方肩铣刀  
4-corner Shoulder Cutter



**NEW**  
**P.79**  
**PSFL**  
四角刀片玉米铣刀  
4-Corner Roughing End Mill



**P.85**  
**PSE**  
方肩铣刀  
Shoulder Cutter



**P.111**  
**PSTW**  
六角刀片方肩铣刀  
6-Corner Shoulder Cutter



**P.119**  
**PHC**  
四角刀片高进给铣刀  
High Feed Cutter



**P.133**  
**PRC**  
圆刀片铣刀  
Radius Cutter



**P.171**  
**PFR**  
精加工用圆弧角铣刀  
Finishing Radius End Mill



**P.187**  
**SF**  
螺纹安装型  
Screw-Fit Type



**New Size**  
**P.193**  
**PXM**  
可换头式铣刀  
Exchangeable Head End Mill

PD

P.33~

## 可转位式钻头 2D/3D/4D/5D

Indexable Drill 2D/3D/4D/5D

### ○ 追加小径尺寸 $\phi 12 \sim \phi 14.5$


Expanded with small diameter sizes

各追加6个新尺寸  $\phi 12$ 、 $\phi 12.5$ 、 $\phi 13$ 、 $\phi 13.5$ 、 $\phi 14$ 、 $\phi 14.5$   
仅3D多增加  $\phi 12.7$ ，共7个尺寸

6 new sizes in  $\phi 12$ 、 $\phi 12.5$ 、 $\phi 13$ 、 $\phi 13.5$ 、 $\phi 14$ 、 $\phi 14.5$   
7 new sizes for 3D only with the addition of  $\phi 12.7$

### ○ 追加外周刃专用刀片 XC9015

Expanded with new XC9015 peripheral insert



实现优良的耐磨损性、  
高耐久性。

High durability with excellent  
abrasion resistance



PZAG

P.59~

## 沉孔钻头

Counterboring Cutter

### ○ 追求切屑分断性的沉孔钻头

Counterboring cutter with perfect chip control

为了连续进行沉孔加工，**切屑分断性** 尤为重要

Since counterboring process is continuous cutting, chip breaking capability is utmost important.

- 强力断屑槽，实现卓越的切屑分断性。
- Excellent chip separation capability with the enhanced muscle breaker corresponding to each cutting edge.

### ○ 丰富的产品系列

Broad size lineup

符合紧固螺栓的沉孔尺寸规格

尺寸系列 (可对应螺栓尺寸 M8~M52)

Size lineup corresponding to the cap bolt's counterbore hole size  
(Corresponds to bolt screw sizes M8 to M52)

直柄型： $\phi 14 \sim \phi 48$

Straight Shank Type

刀盘型： $\phi 54 \sim \phi 82$

Bore Type



**PSFL** P.79~

## 四角刀片玉米铣刀

**4-Corner Roughing End Mill**

- “即使切深量大也不会振动” 的高效铣刀

High productivity cutter with no chatter even in deep milling applications

直柄型：φ32 ~ φ40

Straight Shank Type

刀盘型：φ50 ~ φ100

Bore Type

**PFB** P.161~

## 精加工用球头铣刀

**Finishing Ball End Mill**

- 追加不锈钢用刀片材质：**XP2225**

Expanded with XP2225 insert material for stainless steel




**PXM**

P.193~

## 5种类型追加内冷油孔

5 new types

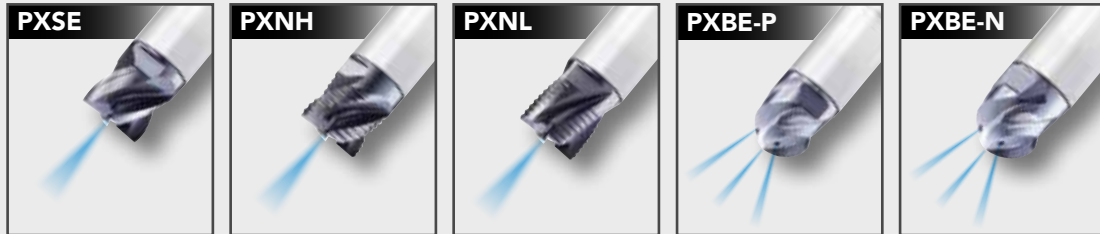**非常适合以下情况!** Perfect for the following situations!**狭小的型腔** Narrow pocketing and slotting

从内部使用冷却剂或气冷，防止切屑卷曲缠绕。提高切屑排出性。  
Prevents clogging of chips by using coolant or air through the internal oil hole.  
Improves chip evacuation.

**不锈钢或耐热合金加工** Stainless steels and heat resistant alloys applications

由于冷却性能提高，可实现不锈钢·耐热合金加工中刀具的长寿命化。  
Long tool life even in stainless steels and heat resistant alloys with improved cooling capability.

## 追加 $\phi 10$

New  $\phi 10$  size

**PXSE/PXVC/PXSM/PXNH/PXNL/PXRE/  
PXDR-P/PXDR-N/PXBE-P/PXBE-N/PXBM**

- 刀具直径的减小可抑制转角部加工振动。
- 圆弧角部可用更小的 R 进行加工
- The reduction of tool diameter enables chatter suppression at the corner region
- Corner region can be processed with smaller R

## 追加 $\phi 32$


New  $\phi 32$  size**PXVC**

- 5刃和8刃
- 大径多刃实现高效率加工
- Available in 5-flute or 8-flute
- Multi-flute large diameter design enables greater processing efficiency



# Designation (Body)



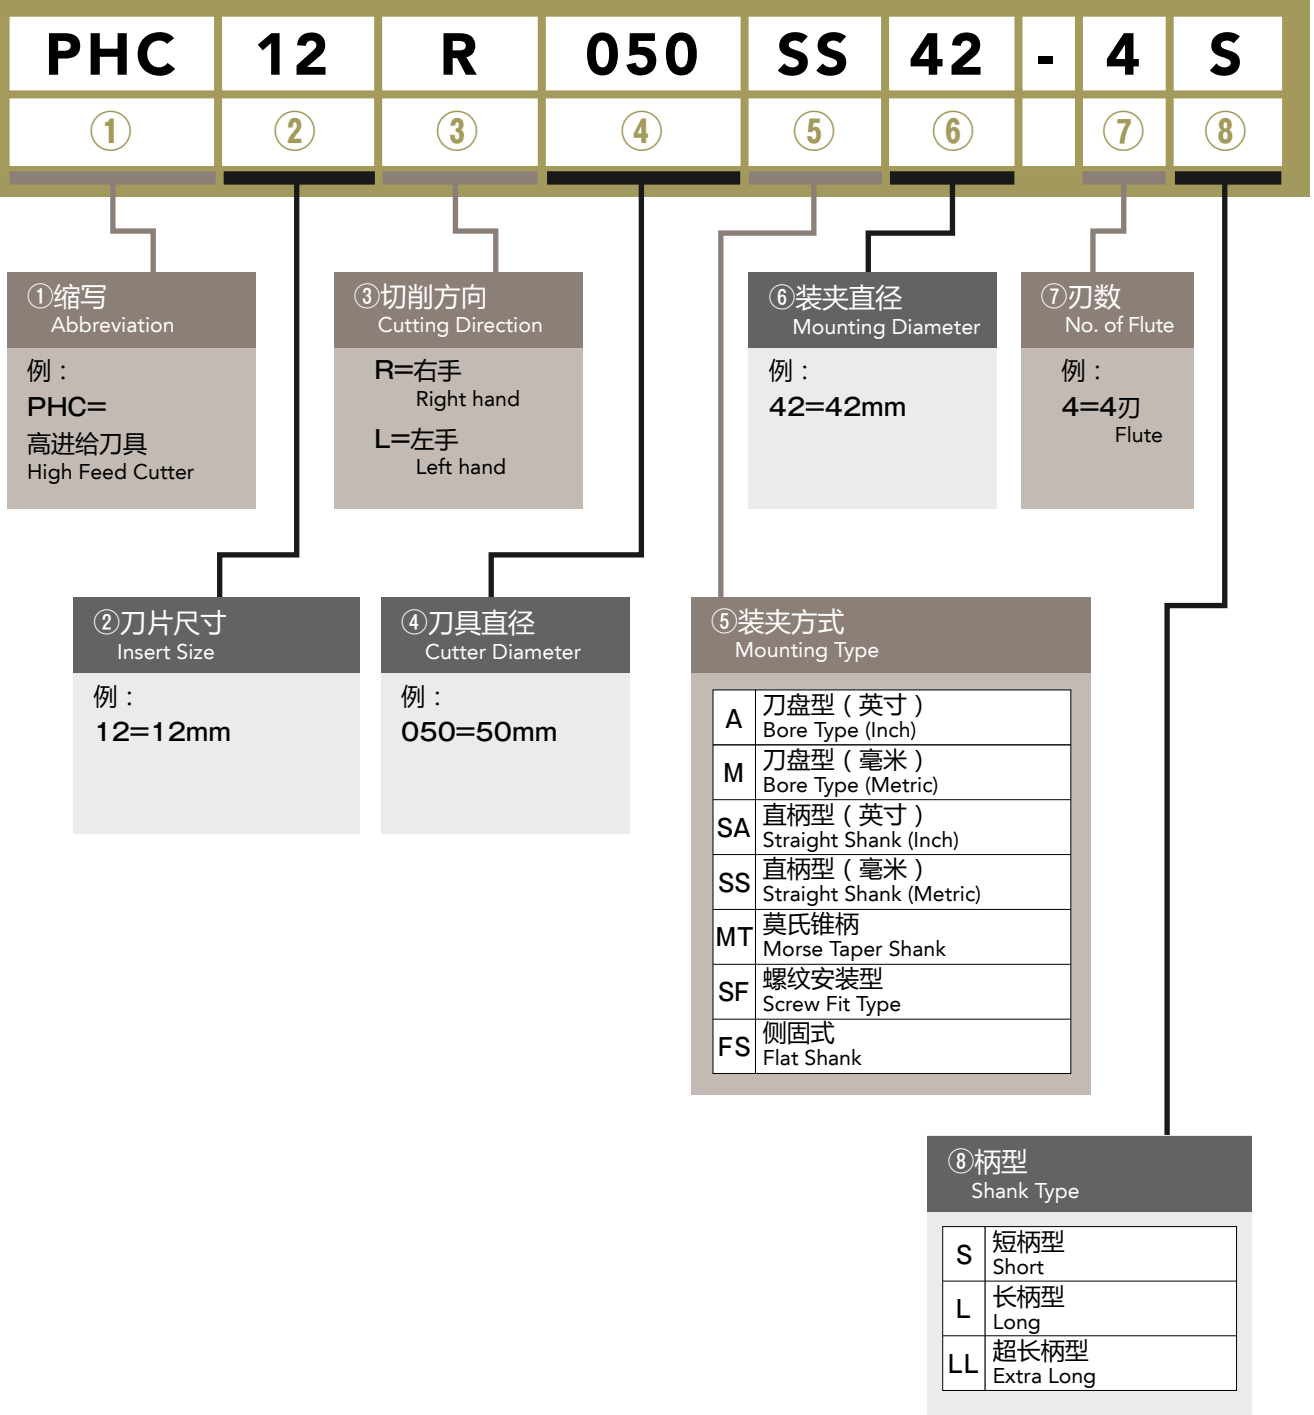





刀体的表示方法









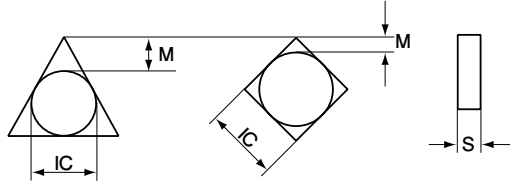
# Designation (Insert)







刀片的表示方法

<b>Z</b>	<b>D</b>	<b>K</b>	<b>T</b>
①	②	③	④

① 形状 Shape of Insert		
<b>C</b>	菱形80° Diamond apex 80°	
<b>D</b>	菱形55° Diamond apex 55°	
<b>O</b>	正八边形 Octagon	
<b>R</b>	圆形 Round	
<b>S</b>	正方形 Square	
<b>T</b>	正三角形 Triangle	
<b>V</b>	菱形35° Diamond apex 35°	
<b>W</b>	不等角六角型 Axonometric hexagon	
<b>Z</b>	其他形状 Other shapes	—

② 后角 Clearance Angle	
<b>A</b>	3° 
<b>C</b>	7° 
<b>D</b>	15° 
<b>E</b>	20° 
<b>N</b>	0° 
<b>P</b>	11° 
<b>X</b>	特殊形状 Special Dimension

③ 公差 Tolerance			
			
记号 Symbol	内接圆 许公差 IC(mm) Inscribed circle tolerance	圆弧高度 许公差 M (mm) Corner height tolerance	厚度 许公差 S (mm) Thickness tolerance
<b>A</b>	±0.025	±0.005	±0.025
<b>C</b>	±0.025	±0.013	±0.025
<b>E</b>	±0.025	±0.025	±0.025
<b>H</b>	±0.013	±0.013	±0.025
<b>K</b> *	±0.05~±0.15	±0.013	±0.025
<b>M</b> *	±0.05~±0.15	±0.08~±0.18	±0.13
<b>N</b> *	±0.05~±0.15	±0.08~±0.18	±0.025
*印：为刀片侧面烧结处理 Sintered insert shown on the side 注：视产品而定，有不同的情况。 Note: Above values may vary depend on product			

④ 断屑槽形状 Feature of Insert			
记号 Symbol	孔形状 Shape of Hole	有无断屑槽 With or without Breaker	刀片横截面 Insert cross section
<b>W</b>	部分圆柱孔倒角 (40°~ 60°) Partial cylindrical hole	无 No breaker	
<b>T</b>		单面 One side	
<b>B</b>	部分圆柱孔倒角 (70°~ 90°) Partial cylindrical hole	无 No breaker	
<b>U</b>	部分圆柱孔倒角，两面 (40°~ 60°) Partial cylindrical hole, both sides	两面 Both side	
<b>N</b>	—	无 No breaker	
<b>R</b>	—	单面 One side	

<b>15</b>	<b>05</b>	<b>08</b>	<b>S</b>	<b>R</b>	<b>-</b>	<b>GM</b>
⑤	⑥	⑦	⑧	⑨	-	⑩

⑤ 切削刃长度 L Length of Cutting Edge

<b>O</b>	
<b>R</b>	
<b>S</b>	
<b>T</b>	
<b>Z</b>	

⑦ 圆弧记号 Corner Radius

记号 Symbol	圆弧半径 RE
<b>02</b>	<b>R0.2</b>
<b>04</b>	<b>R0.4</b>
<b>08</b>	<b>R0.8</b>
<b>12</b>	<b>R1.2</b>
<b>16</b>	<b>R1.6</b>
<b>24</b>	<b>R2.4</b>

⑨ 切削方向 Cutting Direction

记号 Symbol	刀片方向 Cutting Direction
<b>R</b>	右手 Right hand
<b>L</b>	左手 Left hand
<b>N</b>	左右共用 Both ways

⑥ 厚度 S Thickness of Insert

记号 Symbol	厚度 S (mm) Thickness
<b>02</b>	<b>2.38</b>
<b>03</b>	<b>3.18</b>
<b>T3</b>	<b>3.97</b>
<b>04</b>	<b>4.76</b>
<b>05</b>	<b>5.56</b>
<b>06</b>	<b>6.35</b>

⑧ 主切削刃记号 Type of Cutting Edge










记号 Symbol	形状 Appearance
<b>F</b>	 尖刃 Sharp edge
<b>E</b>	 圆刃 Round honing
<b>T</b>	 倒角刃 Chamfer honing
<b>S</b>	 复合刃 Combination honing

⑩ 断屑槽记号 Type of Insert Breaker

记号 Symbol	名称 Name
<b>DN</b>	<b>DN断屑槽</b> breaker
<b>DM</b>	<b>DM断屑槽</b> breaker
<b>DR</b>	<b>DR断屑槽</b> breaker
<b>NM</b>	<b>NM断屑槽</b> breaker
<b>GL</b>	<b>GL断屑槽</b> breaker
<b>GM</b>	<b>GM断屑槽</b> breaker
<b>GR</b>	<b>GR断屑槽</b> breaker
<b>HR</b>	<b>HR断屑槽</b> breaker
<b>SM</b>	<b>SM断屑槽</b> breaker

# Type of Insert Breakers

断屑槽种类和用途 Type of Insert Breakers

	断屑槽名称 Insert Breaker	切削刃横截面形状 Cutting edge cross-section (approximate)	用途 Application
钻孔用 For Drilling	DN		锋利的切削刃及抛光处理，排屑性优良的非铁金属加工用断屑槽 For drilling non-ferrous material: a breaker with sharp cutting edge and polish treatment for excellent chip evacuation.
	DM		具有最佳前角的通用断屑槽，适用于各种加工材料 General purpose breaker with an optimum rake angle suitable for various work materials.
	DR		刃尖强度优良的铸铁加工用断屑槽 For drilling cast iron: a breaker with high rigidity acquired by optimal land width and rake angle.
铣削用 For Milling	NM		锋利的切削刃与大前角相结合，抑制溶着，提高被加工面的光洁度，防止毛刺产生的非铁金属加工专用断屑槽 For machining nonferrous materials: a breaker with a sharp cutting edge and a large rake angle to suppress welding, improve the milling surface and prevent burrs.
	GL		大前角，窄棱边，能够减小切削阻力的低阻力型断屑槽 For milling stainless-steel: a breaker with a large rake angle and a small flat land to reduce cutting force.
	GM		前角与倒棱的平衡性设计，可加工钢~铸铁的通用型断屑槽。 For drilling various materials from steel to cast iron: a breaker with a superior balance of rake angle and flat land.
	GR		由于前角和倒棱，刃尖强度很高，适合铸铁及高硬度材料加工用的高刚性断屑槽。 For machining various materials from steel to cast iron: a highly rigid breaker with large rake angle and flat land to provide a sharp cutting edge and efficient milling.
	HR		锋利性及刚性兼备的高硬度钢加工用断屑槽 For milling high hardened steel: a breaker with sharpness and rigidity on the cutting edge.
	SM		锋利的切削刃，可减少切削阻力，使切屑顺畅排出的难加工材料专用断屑槽 For machining difficult materials: a breaker with a sharp cutting edge to reduce cutting force and provide smooth chip evacuation.

# Type of Inserts

钻头 刀片材质一览 List of insert grades for Drill

分类 Classification	材质 Grades	涂层方法 Coating Method	母材硬度 (HRA) Hardness	表面处理 Surface Treatment		特点 Features	适用产品 Product		
				主成分 Main Component	厚度 Coating Thickness		PXD	PD	PHP
P	XP3425	PVD	91.8	Cr系 复合多层 Composite multilayer	7μm	钢加工用材质 For steel 使用厚膜的涂层, 耐磨损性优良的PXD专用材质 Thick-film coating, wear-resistant material, for PXD operation	○		
	XP9020	PVD	91.9	TiAlN系	3μm	钢·不锈钢加工用材质 For steel and stainless steel 对应用途及领域广泛, 耐崩刃及耐磨损性相平衡的孔加工专用材质 Wide range of applications and areas, well-balanced wear resistance and defect resistance, for drilling operation		○	
	XP9040	PVD	91.9	TiAlN系	3μm	钢·不锈钢加工用材质 For steel and stainless steel 强韧的硬质合金母材, 耐崩刃及耐磨损性优异涂层的孔加工专用材质 High-strength material, chipping-resistant and wear-resistant coating, for drilling operation			○
	XC9015	CVD	91.9	TiCN+Al <sub>2</sub> O <sub>3</sub>	7μm	钢·铸铁加工用材质 For steel and cast iron 强韧的硬质合金母材和厚膜的CVD涂层, 耐磨损性优良的钢·铸铁专用材质 High-strength material, thick-film CVD coating, wear-resistant material, for steel and cast iron		○	
K	XP1010	PVD	91.4	TiAlN系	6μm	铸铁加工用材质 For cast iron 刃尖强度优良的铸铁加工用材质 High rigidity of cutting edge is acquired by optimal land width and rake angle.		○	
	XP1425	PVD	91.8	Cr系 复合多层 Composite multilayer	7μm	铸铁加工用材质 For cast iron 高韧性母材, 耐磨损性优良的厚膜涂层, PXD专用材质 Non-coated fine grain hard metal with high strength and toughness, specifically for PXD operation	○		
	XC9025	CVD	90.8	TiCN+Al <sub>2</sub> O <sub>3</sub>	6μm	铸铁加工用材质 For cast iron 高硬度高韧性的硬质合金母材和耐磨损性优异的涂层, 铸铁孔加工用专用材质 High-strength and tough material, wear-resistant coating, for drilling operation			○
N	CK110	—	92.2	—	—	铝合金·非铁用材质 For aluminum alloy and non-ferrous material 锋利的切削刃及抛光处理的非铁金属加工用材质 Sharp cutting edge with polish treatment		○	
	CF225	—	91.8	—	—	非铁金属加工用材质 For non-ferrous material 高强度与高硬度兼备的无涂层的超微粒子硬质合金, PXD专用材质 High-strength and tough non-coat fine grain hard metal, for PXD operation	○		

○ = Applicable

PFB、PFR、PXM 刀片材质一览 List of insert grades for PFB, PFR, PXM

分类 Classification	材质 Grades	涂层方法 Coating Method	母材硬度 (HRA) Hardness	表面处理 Surface Treatment		特点 Features	适用产品 Product		
				主成分 Main Component	厚度 Coating Thickness		PFB	PFR	PXM
P	XP3225	PVD	91.5	Cr系	3μm	钢用·不锈钢用·铸铁加工用材质 For steel, stainless steel, and cast iron 强韧的硬质合金母材和广泛通用型优质涂层 High-strength material, excellent coating for general purpose	○	○	○
	XP3310	PVD	92.5	SiC含有耐热 强化涂层 Silicon-based heat-resistant coating	3μm	钢用·铸铁加工用材质 For steel and cast iron 高硬度高韧性的硬质合金母材和耐磨损性优异的涂层, 铸铁、高硬度钢专用材质 High-strength and tough material, wear-resistant coating	○	○	
	XP3320	PVD	91.5	SiC含有耐热 强化涂层 Silicon-based heat-resistant coating	3μm	钢用·不锈钢用·铸铁加工用材质 For steel, stainless steel, and cast iron 强韧性的硬质合金母材和耐热性及耐磨损性优良的涂层 High-strength material, heat-resistant and wear-resistant coating	○		○
M	XP2225	PVD	91.5	Cr系	3μm	不锈钢加工用材质 For stainless steel 耐热性优良的硬质合金母材和涂层, 不锈钢加工用材质 Heat-resistant material, coating for stainless steel	○		
N	XC4505	CVD	93.0	DIA	12μm	非铁金属加工用材质 For non-ferrous material 超微结晶金刚石涂层, 高强度涂层的表面处理 High-strength coating of fine diamond	○	○	
H	XP6305	PVD	93.0	SiC含有耐热 强化涂层 Silicon-based heat-resistant coating	3μm	高硬度材料加工用材质 For high hardness material 高温强度及热传导率优良的高硬度材料加工用材质 High temperature strength and excellent thermal conductivity			○

○ = Applicable


# Type of Inserts

铣刀 刀片材质一览 List of insert grades for Milling


分类 Classification	材质 Grades	涂层方法 Coating Method	母材硬度 (HRA) Hardness	表面处理 Surface Treatment		特点 Features
				主成分 Main Component	厚度 Coating Thickness	
P	XC3020	CVD	90.5	TiCN+Al <sub>2</sub> O <sub>3</sub>	10μm	钢用·铸铁加工用材质 For steel and cast iron 高硬度高韧性的硬质合金母材与耐磨损性优异的涂层 High-strength and tough material, wear-resistant coating
	XP3025	PVD	90.5	TiAlN系	5μm	钢用·铸铁加工用材质 For steel and cast iron 高硬度高韧性的硬质合金母材与耐磨损性优异的涂层 High-strength and tough material, wear-resistant coating
	XC3025	CVD	90.8	TiCN+TiN+Al <sub>2</sub> O <sub>3</sub>	4μm	钢用·不锈钢用·铸铁加工用材质 For steel, stainless steel, and cast iron 强韧的硬质合金母材和耐磨损性优异的涂层 High-strength material, excellent wear-resistant coating
	XC3030	CVD	89.5	TiCN+Al <sub>2</sub> O <sub>3</sub>	10μm	钢用·铸铁加工用材质 For steel and cast iron 高硬度高韧性的硬质合金母材与耐磨损性优异的涂层 High-strength and tough material, wear-resistant coating
	XP3035	PVD	89.5	TiAlN系	5μm	钢用·不锈钢用·铸铁加工用材质 For steel, stainless steel, and cast iron 高硬度高韧性的硬质合金母材和耐崩刃及耐磨损性优良的涂层, 通用型铣刀用材质 High-strength and tough material, chipping-resistant and wear-resistant coating, for general purpose milling operation
	XP3930	PVD	90.8	TiAlN	3μm	钢·铸铁·不锈钢加工用材质 For steel, cast iron, and stainless steel 平衡性能优异, 可对应广泛加工材料的通用型材质 For a wide variety of work material
	XP8030	PVD	91.9	TiAlN	3μm	钢·不锈钢加工用材质 For steel and stainless steel 对应用途及领域广泛, 耐崩刃及耐磨损性相平衡的材质 Wide range of applications and areas, well-balanced wear resistance and defect resistance
	XC8035	CVD	89.6	TiCN+Al <sub>2</sub> O <sub>3</sub>	7μm	钢·铸铁加工用材质 For steel and cast iron 高硬度高韧性的硬质合金母材和耐磨损性优异的涂层, 钢·铸铁加工用材质 High-strength and tough material, wear-resistant coating, for steel and cast iron
M	XP2025	PVD	91.0	TiAlN系	5μm	不锈钢·钢加工用材质 For stainless steel and steel 耐磨损性优异的硬质合金母材和涂层 Composed of a tough carbide material with a wear resistant coating
	XP2040	PVD	89.6	TiAlN系	5μm	不锈钢·钢加工用材质 For stainless steel and steel 强韧的硬质合金母材和耐崩刃及耐磨损性优良的涂层, 通用型铣刀用材质 High-strength material, chipping-resistant and wear-resistant coating, for general purpose milling operation
K	XC1015	CVD	91.5	TiCN+Al <sub>2</sub> O <sub>3</sub>	10μm	铸铁加工用材质 For cast iron 高硬度高韧性的硬质合金母材和耐磨损性优异的涂层, 铸铁铣刀专用材质 High-strength and tough material, wear-resistant coating, for milling operation
	XP1020	PVD	91.5	TiAlN系	5μm	铸铁加工用材质 For cast iron 高硬度高韧性的硬质合金母材和耐磨损性优异的涂层, 铸铁铣刀专用材质 High-strength and tough material, wear-resistant coating, for milling operation
N	CK010	—	92.0	—	—	非铁金属加工用材质 For non-ferrous material 耐崩刃性及耐磨损性高的硬质合金、无涂层材质 Chipping-resistant, wear-resistant material and no coating
S	XC5035	CVD	89.3	TiN+Ti(CN)+Al <sub>2</sub> O <sub>3</sub> +Ti(BN)	6μm	耐热钢·不锈钢加工用材质 For heat-resistant alloy and stainless steel 强韧的硬质合金母材, 耐氧化性及高润滑度的涂层, 耐热钢加工用材质 High-strength material, oxidation-resistant and high-lubricity coating
	XC5040	CVD	89.3	TiN+TiB <sub>2</sub>	4μm	耐热钢·不锈钢加工用材质 For heat-resistant alloy and stainless steel 强韧的硬质合金母材, 耐氧化性及高润滑度的涂层, 可湿式加工的耐热钢加工用材质 High-strength material, oxidation-resistant and high-lubricity coating, for wet machining
H	XP6015	PVD	92.2	TiAlN	4μm	高硬度钢用材质 For high-hardness steel 高强度高韧性的硬质合金母材, 耐磨损性优良的涂层, 高硬度钢铣刀专用材质 A grade designed for milling high-hardness steel, made of tough, high-strength carbide material with a wear-resistant coating

# Application Chart

铣刀 刀片材质适用图 Inserts Application Chart

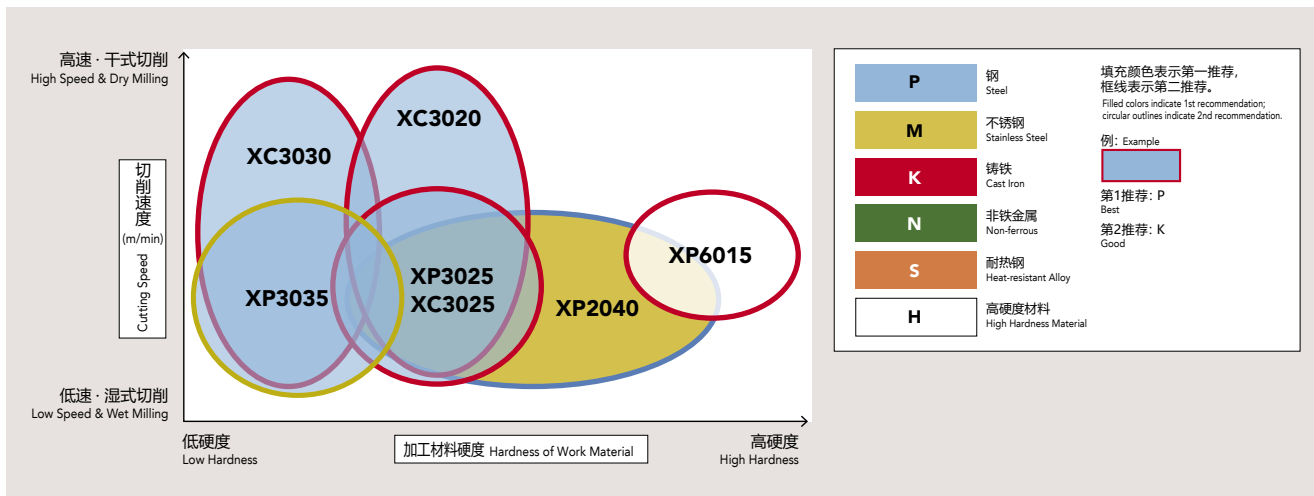

铣刀 加工材料适用材质 Application Chart of Insert Material

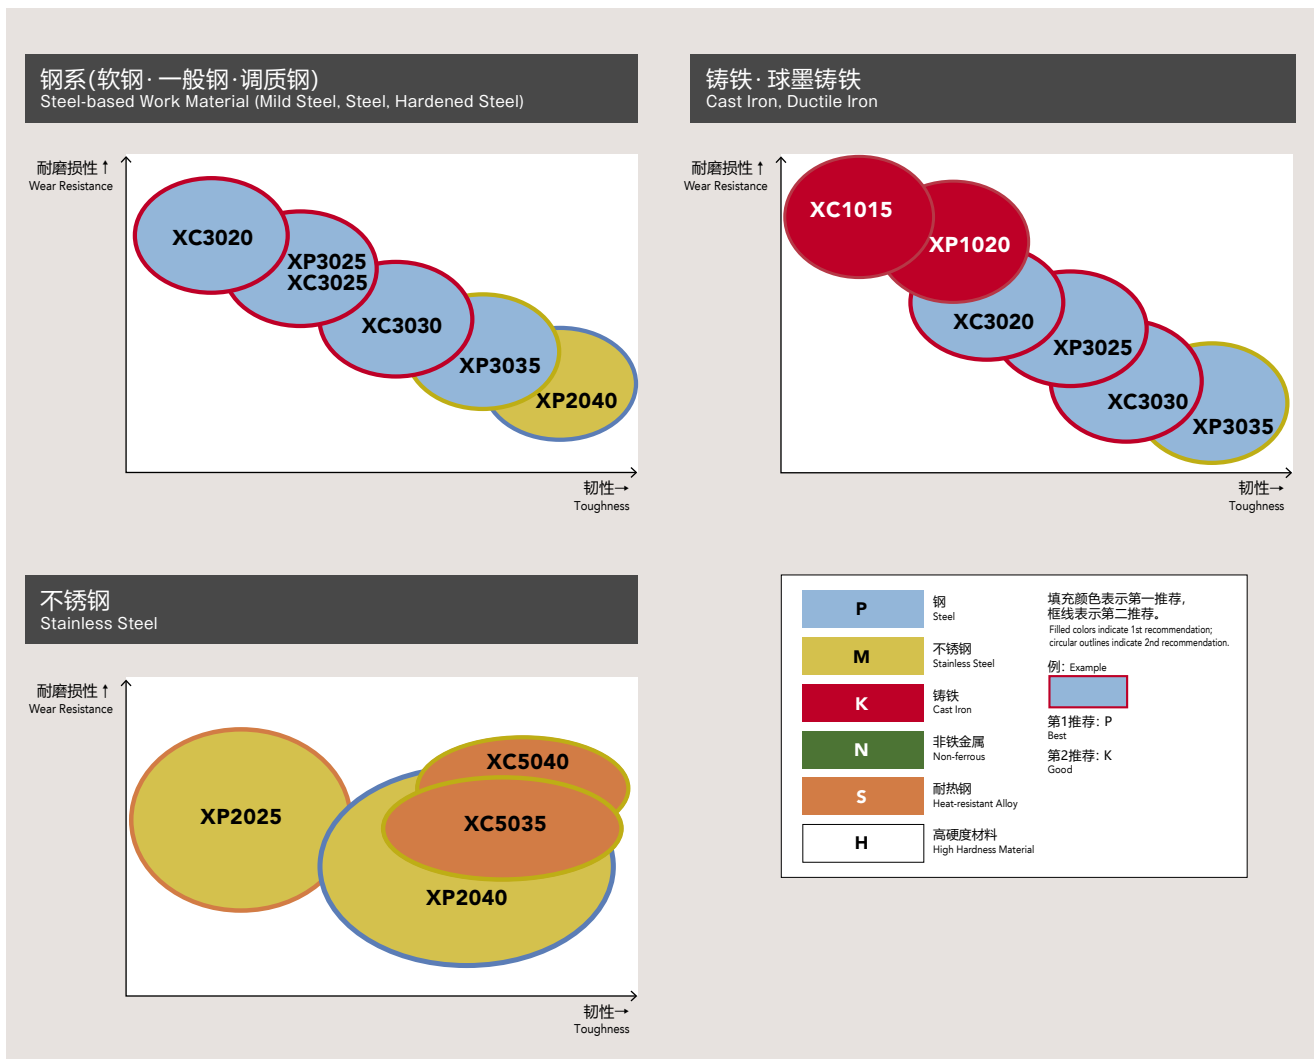


# Phoenix Drills

## 钻头的区分使用 Drill Selection





### 覆盖大径孔加工

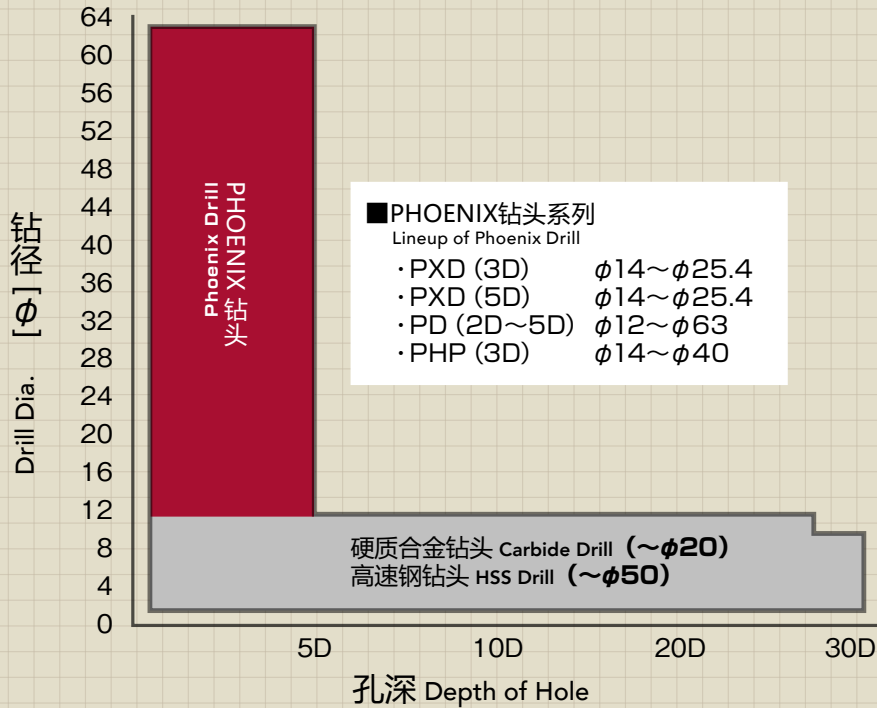OSG's Comprehensive Product Lineup for Drilling Application

#### 孔加工对应示意图 Product Guideline



## 各种钻头的区分使用 Drill Type by Application

			
<b>高速钢钻头</b> HSS Drill	<b>硬质合金钻头</b> Carbide Drill	<b>可换头式钻头</b> Exchangeable Head Drill (PXD)	<b>可转位式钻头</b> Indexable Drill (PD · PHP)
<ul style="list-style-type: none"> <li>● 稳定的加工 Stable drilling</li> <li>● 适用于低功率机器 For low horsepower machines</li> </ul>	<ul style="list-style-type: none"> <li>● 高速、高效率加工 High speed, high efficiency</li> <li>● 寿命长 Long tool life</li> <li>● 高精度孔 High hole accuracy</li> </ul>	<ul style="list-style-type: none"> <li>● 高速、高效率加工 High speed, high efficiency</li> <li>● 寿命长 Long tool life</li> <li>● 成本低于硬质合金钻头 Lower cost than carbide drills</li> <li>● 较高的孔精度 Relatively high hole accuracy</li> </ul>	<ul style="list-style-type: none"> <li>● 高性价比 High cost performance</li> <li>● 高效率加工 High efficiency operation</li> </ul>

## PXD 可换头式钻头 3D/5D

Exchangeable Head Drill 3D/5D

- 与硬质合金钻头相同的效率
- 对应高精度孔加工
  - 对应挤压丝锥底孔加工(仅3D型)
- 一把刀体可对应多种加工尺寸
- 比硬质合金钻头性价比高
- 装卸简单
  - 不使用螺纹, 简单且牢固
- Efficiency: equivalent to carbide drills.
- For drilling holes that require accuracy.
  - Optimal for pre-drilled holes for forming taps (3D only)
- A single cutter body is applicable for multiple drilling diameters.
- Cost performance: higher than carbide drills.
- Easy attachment and removal.
  - Screwless, simple but firm fastening.



P.17 ~

## PD 可转位式钻头 2D/3D/4D/5D

Indexable Drill 2D/3D/4D/5D

- 排屑槽内精研磨的处理, 保证良好的排屑性, 使其能在高进给的条件下加工!
- 外周刃、中心刃采用同规格刀片, 方便刀具管理!
- NEW** ● 追加高耐久性的外周刃专用刀片!
- Finishing treatment on flute surface enables high feed machining.
- Using same insert to both center and peripheral cutting edges simplify tool management.
- Expanded with new peripheral insert for improved durability.



P.33 ~

## PHP 可转位式钻头 3D

Indexable Drill 3D

- 先端角形状可对应困难的加工形状
  - 倾斜面, 铸肌面, 多层板
- 在对应高速钢钻头的低速领域也可加工
- Shaped corner tips for unstable drilling shapes.
  - Inclined surface, cast surface and stacked plates.
- Possible to drill even in low-speed HSS areas.



P.53 ~

# Pre-Drilled Hole Size for Tap

## 丝锥底孔径·推荐丝锥一览表 Recommended taps and size chart

### ■ PXD用 for PXD

#### ■ 切削丝锥用 for Cutting Tap

螺纹尺寸 Thread Size	推荐底孔径 Recommended drill hole dia.	最小底孔径 Min. drill hole dia.	最大底孔径 Max. drill hole dia.		适用PXD刀头 Applicable PXD head	推荐丝锥 商品号 Recommended Tap No.	
		各精度共通	旧JIS2级用	6H用		A-SFT	A-POT
M 15 × 1	14	13.95	14.15	14.15	PXDH1400...	8325356	8325156
M 16 × 2	14	13.9	14.2	14.21	PXDH1400...	8325357	8325157
M 16 × 1.5	14.5	14.4	14.6	14.67	PXDH1450...	8325360	8325160
M 16 × 1	15	14.95	15.15	15.15	PXDH1500...	8325362	8325162
M 17 × 1.5	15.5	15.4	15.68	15.67	PXDH1550...	8325364	8325164
M 17 × 1	16	15.95	16.15	16.15	PXDH1600...	8325366	8325166
M 18 × 2.5	15.5	15.3	15.7	15.74	PXDH1550...	8325367	3825167
M 18 × 2	16	15.9	16.2	16.21	PXDH1600...	8325369	8325169
M 18 × 1.5	16.5	16.4	16.6	16.67	PXDH1650...	8325370	8325170
M 18 × 1	17	16.95	17.15	17.15	PXDH1700...	8325372	8325172
M 20 × 2.5	17.5	17.3	17.7	17.74	PXDH1750...	8325377	8325177
M 20 × 2	18	17.9	18.2	18.21	PXDH1800...	8325379	8325179
M 20 × 1.5	18.5	18.4	18.6	18.67	PXDH1850...	8325380	8325180
M 20 × 1	19	18.95	19.15	19.15	PXDH1900...	8325382	8325182
M 22 × 2.5	19.5	19.3	19.7	19.74	PXDH1950...	8325387	8325187
M 22 × 2	20	19.9	20.2	20.21	PXDH2000...	8325389	8325189
M 22 × 1.5	20.5	20.4	20.6	20.67	PXDH2050...	8325390	8325190
M 22 × 1	21	20.95	21.15	21.15	PXDH2100...	8325392	8325192
M 24 × 3	21	20.8	21.2	21.25	PXDH2100...	8325397	8325197
M 24 × 2	22	21.9	22.2	22.21	PXDH2200...	8325399	8325199
M 24 × 1.5	22.5	22.4	22.6	22.67	PXDH2250...	8325400	8325200
M 24 × 1	23	22.95	23.15	23.15	PXDH2300...	8325402	8325202
M 27 × 3	24	23.8	24.2	24.25	PXDH2400...	8326605	-

※关于铣刀柄、长柄型的商品号，请参阅「高效率·多功能丝锥 A-TAP」样本。

※ For additional sizes and styles, please refer to the high efficiency, multi-purpose A-Tap series catalog.

#### ■ 挤压丝锥用底孔径(3D型) for Forming Tap (PXD 3D Type)

螺纹尺寸 Thread Size	推荐底孔径 Recommended drill hole dia.	旧JIS2级用				适用PXD刀头 Applicable PXD head	推荐丝锥 商品号 Recommended Tap No.
		精度 Grade	丝锥精度 RH Limit	最小底孔径 Min. drill hole dia.	最大底孔径 Max. drill hole dia.		S-XPF
M 16 × 2	14.95	STD	RH10	14.92	15.04	PXDH1495...	8322245
M 16 × 1.5	15.25	STD	RH 9	15.21	15.3	PXDH1525...	8322255
M 18 × 2.5	16.7	STD	RH11	16.63	16.78	PXDH1670...	8322263
M 18 × 1.5	17.25	STD	RH10	17.22	17.31	PXDH1725...	8322267
M 20 × 2.5	18.7	STD	RH11	18.63	18.78	PXDH1870...	8322273
M 20 × 1.5	19.25	STD	RH10	19.22	19.31	PXDH1925...	8322277
M 22 × 2.5	20.7	STD	RH11	20.63	20.78	PXDH2070...	8322283
M 22 × 1.5	21.25	STD	RH10	21.22	21.31	PXDH2125...	8322287
M 24 × 3	22.4	STD	RH13	22.36	22.53	PXDH2240...	8322295
M 24 × 1.5	23.25	STD	RH10	23.22	23.31	PXDH2325...	8322299
M 27 × 3	25.4	STD	RH13	25.36	25.53	PXDH2540...	8322305

※请使用PXD 3D型。PD、PXD 5D型不推荐进行挤压丝锥底孔加工。

※无法对应S-XPF挤压丝锥长柄型(LT-S-XPF)的底孔加工。

※ For pre-drilled hole of forming tap, PXD 3D should be used. PD and PXD 5D are not recommended.

※ Not compatible with the XPF long shank forming tap (LT-S-XPF).

## ■ P2D/P3D·PHP用 for P2D/P3D and PHP

■ 切削丝锥用 for Cutting Tap

螺纹尺寸 Thread Size	推荐底孔径 Recommended drill hole diameter	最小底孔径 Min. drill hole dia.	最大底孔径 Max. drill hole dia.		适用刀体 Applicable Body			推荐丝锥 商品号 Recommended Tap No.	
			各精度共通	旧JIS 2级用	6H用	P2D	P3D	PHP	A-SFT
M 14 × 2	12	11.84	12.21	12.21	P2D1200FS20M03	P3D1200FS20M03	-	8325347	-
M 14 × 1.5	12.5	12.38	12.67	12.67	P2D1250FS20M03	P3D1250FS20M03	-	8325350	-
M 16 × 2	14	13.9	14.2	14.21	P2D1400FS20M03	P3D1400FS20M03	PHP140FS20M04-3D	8325357	8325157
M 16 × 1.5	14.5	14.4	14.6	14.67	P2D1450FS20M03	P3D1450FS20M03	PHP145FS20M04-3D	8325360	8325160
M 17 × 1.5	15.5	15.4	15.68	15.67	P2D1550FS20M04	P3D1550FS20M04	PHP155FS20M04-3D	8325364	8325164
M 18 × 2.5	15.5	15.3	15.7	15.74				8325367	3825167
M 18 × 2	16	15.9	16.2	16.21	P2D1600FS20M04	P3D1600FS20M04	PHP160FS20M04-3D	8325369	8325169
M 18 × 1.5	16.5	16.4	16.6	16.67	P2D1650FS20M04	P3D1650FS20M04	PHP165FS20M05-3D	8325370	8325170
M 20 × 2.5	17.5	17.3	17.7	17.74	P2D1750FS20M05	P3D1750FS20M05	PHP175FS25M05-3D	8325377	8325177
					P2D1750FS25M05	P3D1750FS25M05			
M 20 × 2	18	17.9	18.2	18.21	P2D1800FS25M05	P3D1800FS25M05	PHP180FS25M05-3D	8325379	8325179
M 20 × 1.5	18.5	18.4	18.6	18.67	P2D1850FS25M05	P3D1850FS25M05	PHP185FS25M06-3D	8325380	8325180
M 22 × 2.5	19.5	19.3	19.7	19.74	P2D1950FS25M06	P3D1950FS25M06	PHP195FS25M06-3D	8325387	8325187
M 22 × 2	20	19.9	20.2	20.21	P2D2000FS25M06	P3D2000FS25M06	PHP200FS25M06-3D	8325389	8325189
M 22 × 1.5	20.5	20.4	20.6	20.67	P2D2050FS20M06	P3D2050FS20M06	PHP205FS25M06-3D	8325390	8325190
M 24 × 3	21	20.8	21.2	21.25	P2D2100FS25M07	P3D2100FS25M07	PHP210FS25M07-3D	8325397	8325197
M 24 × 2	22	21.9	22.2	22.21	P2D2200FS25M07	P3D2200FS25M07	PHP220FS25M07-3D	8325399	8325199
M 24 × 1.5	22.5	22.4	22.6	22.67	P2D2250FS25M07	P3D2250FS25M07	PHP225FS25M07-3D	8325400	8325200
M 27 × 3	24	23.8	24.2	24.25	P2D2400FS25M07	P3D2400FS25M07	PHP240FS32M07-3D	8326605	
					P2D2400FS32M07	P3D2400FS32M07			
M 27 × 1.5	25.5	25.4	25.6	25.67	P2D2550FS25M08	P3D2550FS25M08	PHP255FS32M08-3D	8326608	
					P2D2550FS32M08	P3D2550FS32M08			
M 30 × 3.5	26.5	26.3	26.7	26.77	P2D2650FS32M08	P3D2650FS32M08	PHP265FS32M08-3D	8326614	
M 30 × 3	27	26.8	27.2	27.25	P2D2700FS32M08	P3D2700FS32M08	PHP270FS32M08-3D	8326615	
M 30 × 1.5	28.5	28.4	28.6	28.67	P2D2850FS32M08	P3D2850FS32M08	-	8326618	
M 33 × 3.5	29.5	29.3	29.7	29.77	-	P3D2950FS32M09	-	8326624	
M 33 × 3	30	29.8	30.2	30.25	P2D3000FS32M09	P3D3000FS32M09	PHP300FS32M10-3D	8326625	
M 33 × 1.5	31.5	31.4	31.6	31.67	-	P3D3150FS32M09	-	8326628	
M 36 × 4	32	31.7	32.2	32.27	P2D3200FS32M09	P3D3200FS32M09	PHP320FS32M10-3D	8326633	-
					P2D3200FS40M09	P3D3200FS40M09			
M 36 × 3	33	32.8	33.2	33.25	P2D3300FS40M09	P3D3300FS40M09	PHP330FS40M10-3D	8326635	
M 36 × 1.5	34.5	34.4	34.6	34.67	-	P3D3450FS40M10	-	8326638	
M 39 × 4	35	34.7	35.2	35.27	P2D3500FS40M10	P3D3500FS40M10	PHP350FS40M12-3D	8326643	
M 42 × 4.5	37.5	37.2	37.7	37.79	-	P3D3750FS40M10	-	8326652	
M 42 × 3	39	38.8	39.2	39.25	P2D3900FS40M12	P3D3900FS40M12	PHP390FS40M12-3D	8326655	
M 42 × 1.5	40.5	40.4	40.6	40.67	-	P3D4050FS40M12	-	8326658	
M 45 × 4.5	40.5	40.2	40.7	40.79	-	-	-	8326659	
M 48 × 5	43	42.6	43.2	43.29	P2D4300FS40M12	P3D4300FS40M12	-	8326661	
M 48 × 3	45	44.8	45.2	45.25	P2D4500FS40M13	P3D4500FS40M13	-	8326665	
M 56 × 5.5	50.5	50.1	50.7	50.7	-	P3D5050FS40M14	-	8326670	

※关于铣刀柄、长柄型的商品号，请参阅「高效率·多功能丝锥 A-TAP」样本。

For additional sizes and styles, please refer to the high efficiency, multi-purpose A-Tap series catalog.

■ 使用 OSG Phoenix 钻头进行钻孔加工后，请使用 A-TAP·XPF。

Please use the A-Tap and XPF after drilling with the OSG Phoenix drills.

### ■ A-Tap系列 A-Tap Series



切削丝锥中稳定加工的新标准  
The new industry standard for stable threading.

### ■ XPF系列 XPF Series




无切屑的进化型挤压丝锥  
Superior forming taps that stably make threads without creating chips.

# » Phoenix PXD

可换头式钻头3D/5D  
Exchangeable Head Drill for 3D, 5D.

Phoenix Exchangeable Drill

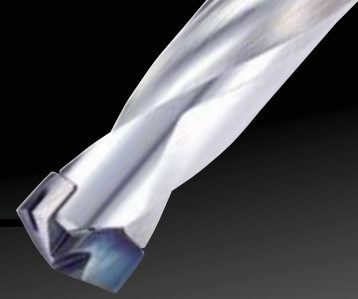

## ■ 特点 Features

防止加工过程中切屑的卷曲  
缠绕

O.D. relief grinding prevents the curling of chips during drilling.

内冷可以高效率加工  
Internal coolant capability enables highly efficient drilling.

精研磨过的排屑槽提  
供良好的切屑排出性

Polished flutes enable smooth chip evacuation.

OSG 专利的牢固的固定方式 **PAT. in Japan**

OSG's proprietary construction ensures secure mounting.



最适合大径加工的刃形

Cutting edges designed optimally for large-diameter drilling.

- OSG 专利的固定方法在不使用螺纹的情况下实现了牢固固定。
- 没有螺纹强度等不稳定因素，装卸方便。
- With OSG's proprietary mounting system, the exchangeable head can be securely mounted without screws.
- Eliminates loose screw problems. Easy attachment and removal system.


# 根据加工材料的不同选择刀头

Exchangeable head selection based on work material



## 钢用(PC) For steel

- 专为钢加工设计的刀头  
Exchangeable head designed for steel
- 最适用于软钢~低、中碳素钢的加工  
Suitable for mild steel and low to medium carbon steel



## 铸铁用(KC) For cast iron

- 专为铸铁加工设计的刀头  
Exchangeable head designed for cast iron
- 最适用于铸铁、球墨铸铁的加工  
Suitable for cast iron and ductile cast iron



## 非铁用(NC) For non-ferrous metal

- 专为非铁金属加工设计的刀头  
Exchangeable head designed for non-ferrous metals
- 最适用于铝合金铸件等的加工  
Suitable for aluminum alloy casting

	低碳素钢 Low Carbon Steel	中碳素钢 Medium Carbon Steel	高碳素钢 High Carbon Steel	合金钢 Alloy Steel	调质钢 Hardened Steel		铸铁 Cast Iron	球墨铸铁 Ductile Cast Iron	铜合金 Copper Alloy	铝合金铸件 Aluminum Alloy Casting
	C ~ 0.25%	C 0.25 ~ 0.45%	C 0.45% ~	SCM	~ 35HRC	35 ~ 45HRC	FC	FCD	Cu	AC·ADC
PC (钢用) for Steel	◎	◎	◎	○	○		○	○		
KC (铸铁用) for Cast Iron	○	○	○	○	○		◎	◎		
NC (非铁用) for Non-ferrous Metal									○	◎

◎第一推荐材质 Best ○第二推荐材质 Good

# PXD专用WDI 涂层(PC·KC)

OSG's proprietary WDI coating engineered exclusively for PXD

- 采用PXD 专用WDI 涂层，抑制了外周刃带的磨损。在高速领域中实现长寿命。

The WDI coating on the PXD prevents margin wear, thereby enabling high speed drilling and prolonging tool life.

	涂层构造 Coating Structure	厚度 Thickness (μm)	硬度 Surface Hardness (HV)	氧化开始温度 Oxidation Temperature (°C)
PXD专用 WDI®涂层 WDI coating exclusive for PXD	多层 Multiple Layer	7	3,300	1,100

WDI为OSG株式会社的注册商标。  
WDI is a registered trademark of OSG Corporation.

# 只需更换刀头，一把刀体就能对应多种加工径


A single cutter body applicable for multiple drilling diameters.

PXD刀体型号 PXD Body Designation	加工径 (mm) Drilling Dia.	
	最小 Min.	最大 Max.
PXDZ140-...	14	14.49
PXDZ145-...	14.5	14.99
PXDZ150-...	15	15.99
PXDZ160-...	16	16.99
PXDZ170-...	17	17.99
PXDZ180-...	18	18.99
PXDZ190-...	19	19.99
PXDZ200-...	20	20.99
PXDZ210-...	21	21.99
PXDZ220-...	22	22.99
PXDZ230-...	23	23.99
PXDZ240-...	24	24.99
PXDZ250-...	25	25.99

# Phoenix


可换头式钻头  
Exchangeable Head Drill

## PXDZ 3D/5D



# Specification

形状尺寸表 Specification

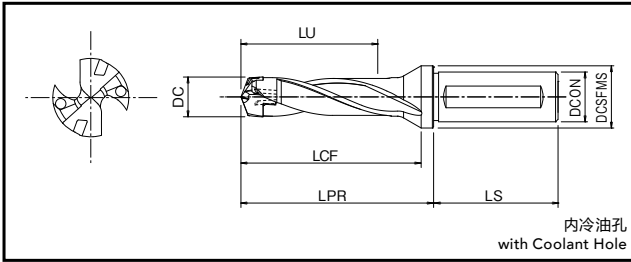

单位:mm Unit:mm

3D型 3D Type

商品号 EDP No.	名称 Designation	加工径 DC		有效加工 深度 LU	槽长 LCF	LPR	LS	柄径 DCON	DCSFMS	螺丝刀 Driver	适用刀头 Applicable Head	
		最小 DCN	最大 DCX									
7831015	PXDZ140-3D-113.5-16	14	14.49	43	63.4	69.9	48	16	20	①	①	
7831016	PXDZ145-3D-115.5-16	14.5	14.99	44.5	65.5	72	48	16	20		②	
7831017	PXDZ150-3D-119.5-20	15	15.99	46.5	67.1	73.6	50	20	25		③	③
7831018	PXDZ160-3D-123.5-20	16	16.99	49.5	71.7	78.2	50	20	25			④
7831019	PXDZ170-3D-128.5-20	17	17.99	52.5	76.8	83.3	50	20	25			⑤
7831020	PXDZ180-3D-138.5-25	18	18.99	55.5	81.4	87.9	56	25	32		⑥	⑥
7831021	PXDZ190-3D-142.5-25	19	19.99	58.5	85.4	91.9	56	25	32	⑦		
7831022	PXDZ200-3D-146.5-25	20	20.99	61.5	90.1	96.6	56	25	32	②	⑧	
7831023	PXDZ210-3D-154.5-32	21	21.99	64.5	94.7	101.2	60	32	42		⑨	
7831024	PXDZ220-3D-158.5-32	22	22.99	67.5	98.8	105.3	60	32	42		⑩	
7831025	PXDZ230-3D-162.5-32	23	23.99	70.5	103.4	109.9	60	32	42	③	⑪	
7831026	PXDZ240-3D-167.5-32	24	24.99	73.5	108.4	114.9	60	32	42		⑫	
7831027	PXDZ250-3D-170.5-32	25	25.99	76.5	112	118.5	60	32	42		⑬	

PXDZ 的名称中标明了刀体的全长(刀头未安装时的长度)。

例) 商品号: 7831015

名称: PXDZ140-3D-113.5-16

↑ 刀体全长

PXDZ designation includes the total length of body (without head).

ex) EDP No.: 7831015

Designation: PXDZ140-3D-113.5-16

↑ total length of body

## 5D型 5D Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	加工径 DC		有效加工 深度 LU	槽长 LCF	LPR	LS	柄径 DCON	DCSFSM	螺丝刀 Driver	适用刀头 Applicable Head
		最小 DCN	最大 DCX								
7831065	PXDZ140-5D-141.5-16	14	14.49	71.2	92.9	97.9	48	16	20	①	①
7831066	PXDZ145-5D-144.5-16	14.5	14.99	73.7	96	101	48	16	20		②
7831067	PXDZ150-5D-149.5-20	15	15.99	77.5	97.1	103.6	50	20	25		③
7831068	PXDZ160-5D-155.5-20	16	16.99	82.5	103.7	110.2	50	20	25		④
7831069	PXDZ170-5D-162.5-20	17	17.99	87.5	110.8	117.3	50	20	25		⑤
7831070	PXDZ180-5D-174.5-25	18	18.99	92.5	117.4	123.9	56	25	32		⑥
7831071	PXDZ190-5D-180.5-25	19	19.99	97.5	123.4	129.9	56	25	32	②	⑦
7831072	PXDZ200-5D-186.5-25	20	20.99	102.5	130.1	136.6	56	25	32		⑧
7831073	PXDZ210-5D-196.5-32	21	21.99	107.5	136.7	143.2	60	32	42		⑨
7831074	PXDZ220-5D-202.5-32	22	22.99	112.5	142.8	149.3	60	32	42		⑩
7831075	PXDZ230-5D-208.5-32	23	23.99	117.5	149.4	155.9	60	32	42	③	⑪
7831076	PXDZ240-5D-215.5-32	24	24.99	122.5	156.4	162.9	60	32	42		⑫
7831077	PXDZ250-5D-220.5-32	25	25.99	127.5	162	168.5	60	32	42		⑬

PXDZ 的名称中标明了刀体的全长(刀头未安装时的长度)。  
例) 商品号 : 7831015

名称 : PXDZ140-3D-113.5-16

↑ 刀体全长


PXDZ designation includes the total length of body (without head).  
ex) EDP No. : 7831015

Designation : PXDZ140-3D-113.5-16

↑ total length of body

# Accessories

## 零件 Accessories

螺丝刀 Driver	商品号 EDP No.	名称 Designation	板厚 Sheet Thickness	适用刀头 Applicable Head	
	①	7808282	PXDP1400-1899	1.5	① ~ ⑥
	②	7808283	PXDP1900-2299	1.8	⑦ ~ ⑩
	③	7808284	PXDP2300-2699	2	⑪ ~ ⑬

单位:mm Unit:mm

螺丝刀请另购。 The drivers are sold separately from the cutters.

库存种类都为○(即标准库存品) Stock are categorized as ○ (Standard stock item).


可换头式钻头  
Exchangeable Head Drill

## PXD刀头

Head

## Heads

## ■适用刀头 Heads

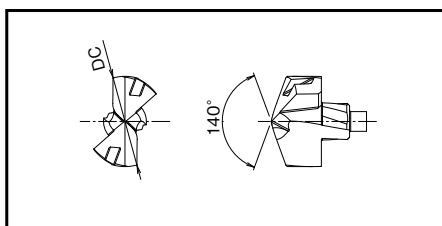

钢用(PC) For steel (PC)

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	直径 DC	材质 Grades	库存 Stock
7831140	PXDH1400-PC	14	XP3425	○
	PXDH1410-PC	14.1	XP3425	※
	① PXDH1420-PC	14.2	XP3425	※
	PXDH1430-PC	14.3	XP3425	※
	PXDH1440-PC	14.4	XP3425	※
7831145	PXDH1450-PC	14.5	XP3425	○
	PXDH1460-PC	14.6	XP3425	※
	② PXDH1470-PC	14.7	XP3425	※
	PXDH1480-PC	14.8	XP3425	※
	PXDH1490-PC	14.9	XP3425	※
7831351	PXDH1495-PC	14.95	XP3425	○
7831150	PXDH1500-PC	15	XP3425	○
	PXDH1510-PC	15.1	XP3425	※
	PXDH1520-PC	15.2	XP3425	※
7831352	PXDH1525-PC	15.25	XP3425	○
	PXDH1530-PC	15.3	XP3425	※
	③ PXDH1540-PC	15.4	XP3425	※
7831155	PXDH1550-PC	15.5	XP3425	○
	PXDH1560-PC	15.6	XP3425	※
	PXDH1570-PC	15.7	XP3425	※
	PXDH1580-PC	15.8	XP3425	※
	PXDH1590-PC	15.9	XP3425	※
7831160	PXDH1600-PC	16	XP3425	○
	PXDH1610-PC	16.1	XP3425	※
	PXDH1620-PC	16.2	XP3425	※
	④ PXDH1630-PC	16.3	XP3425	※
	PXDH1640-PC	16.4	XP3425	※
7831165	PXDH1650-PC	16.5	XP3425	○
	PXDH1660-PC	16.6	XP3425	※
7831167	PXDH1670-PC	16.7	XP3425	○

商品号 EDP No.	名称 Designation	直径 DC	材质 Grades	库存 Stock
	PXDH1680-PC	16.8	XP3425	※
	④ PXDH1690-PC	16.9	XP3425	※
7831170	PXDH1700-PC	17	XP3425	○
	PXDH1710-PC	17.1	XP3425	※
	PXDH1720-PC	17.2	XP3425	※
7831353	PXDH1725-PC	17.25	XP3425	○
	PXDH1730-PC	17.3	XP3425	※
	⑤ PXDH1740-PC	17.4	XP3425	※
7831175	PXDH1750-PC	17.5	XP3425	○
	PXDH1760-PC	17.6	XP3425	※
	PXDH1770-PC	17.7	XP3425	※
	PXDH1780-PC	17.8	XP3425	※
	PXDH1790-PC	17.9	XP3425	※
7831180	PXDH1800-PC	18	XP3425	○
	PXDH1810-PC	18.1	XP3425	※
	PXDH1820-PC	18.2	XP3425	※
	PXDH1830-PC	18.3	XP3425	※
	PXDH1840-PC	18.4	XP3425	※
	⑥ PXDH1850-PC	18.5	XP3425	○
7831185	PXDH1860-PC	18.6	XP3425	※
7831187	PXDH1870-PC	18.7	XP3425	○
	PXDH1880-PC	18.8	XP3425	※
	PXDH1890-PC	18.9	XP3425	※
7831190	PXDH1900-PC	19	XP3425	○
	PXDH1910-PC	19.1	XP3425	※
	PXDH1920-PC	19.2	XP3425	※
7831354	PXDH1925-PC	19.25	XP3425	○
	PXDH1930-PC	19.3	XP3425	※
	PXDH1940-PC	19.4	XP3425	※
7831195	PXDH1950-PC	19.5	XP3425	○

FROM

商品号 EDP No.	名称 Designation	直径 DC	材质 Grades	库存 Stock
	PXDH1960-PC	19.6	XP3425	※
	PXDH1970-PC	19.7	XP3425	※
	PXDH1980-PC	19.8	XP3425	※
	PXDH1990-PC	19.9	XP3425	※
7831200	PXDH2000-PC	20	XP3425	○
	PXDH2010-PC	20.1	XP3425	※
	PXDH2020-PC	20.2	XP3425	※
	PXDH2030-PC	20.3	XP3425	※
	PXDH2040-PC	20.4	XP3425	※
7831205	PXDH2050-PC	20.5	XP3425	○
	PXDH2060-PC	20.6	XP3425	※
7831207	PXDH2070-PC	20.7	XP3425	○
	PXDH2080-PC	20.8	XP3425	※
	PXDH2090-PC	20.9	XP3425	※
7831210	PXDH2100-PC	21	XP3425	○
	PXDH2110-PC	21.1	XP3425	※
	PXDH2120-PC	21.2	XP3425	※
7831355	PXDH2125-PC	21.25	XP3425	○
	PXDH2130-PC	21.3	XP3425	※
	PXDH2140-PC	21.4	XP3425	※
7831215	PXDH2150-PC	21.5	XP3425	○
	PXDH2160-PC	21.6	XP3425	※
	PXDH2170-PC	21.7	XP3425	※
	PXDH2180-PC	21.8	XP3425	※
	PXDH2190-PC	21.9	XP3425	※
7831220	PXDH2200-PC	22	XP3425	○
	PXDH2210-PC	22.1	XP3425	※
	PXDH2220-PC	22.2	XP3425	※
	PXDH2230-PC	22.3	XP3425	※
7831224	PXDH2240-PC	22.4	XP3425	○
7831225	PXDH2250-PC	22.5	XP3425	○

蓝字 = 切削丝锥底孔  
 红字 = 挤压丝锥底孔

Blue = pre-drilled hole for cutting taps  
 Red = pre-drilled hole for forming taps  
 当用来加工挤压丝锥底孔时, 请使用3D型。

For pre-drilled hole of forming tap, 3D type should be used. (5D is not recommended)

对应螺纹名称推荐的底孔径请参照P.15。

Please see p.15 for recommended pre-drilled hole size.

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	直径 DC	材质 Grades	库存 Stock
	PXDH2260-PC	22.6	XP3425	※
	PXDH2270-PC	22.7	XP3425	※
	PXDH2280-PC	22.8	XP3425	※
	PXDH2290-PC	22.9	XP3425	※
7831230	PXDH2300-PC	23	XP3425	○
	PXDH2310-PC	23.1	XP3425	※
	PXDH2320-PC	23.2	XP3425	※
7831356	PXDH2325-PC	23.25	XP3425	○
	PXDH2330-PC	23.3	XP3425	※
	PXDH2340-PC	23.4	XP3425	※
7831235	PXDH2350-PC	23.5	XP3425	○
	PXDH2360-PC	23.6	XP3425	※
	PXDH2370-PC	23.7	XP3425	※
	PXDH2380-PC	23.8	XP3425	※
	PXDH2390-PC	23.9	XP3425	※
7831240	PXDH2400-PC	24	XP3425	○
	PXDH2410-PC	24.1	XP3425	※
	PXDH2420-PC	24.2	XP3425	※
	PXDH2430-PC	24.3	XP3425	※
	PXDH2440-PC	24.4	XP3425	※
7831245	PXDH2450-PC	24.5	XP3425	○
	PXDH2460-PC	24.6	XP3425	※
	PXDH2470-PC	24.7	XP3425	※
	PXDH2480-PC	24.8	XP3425	※
	PXDH2490-PC	24.9	XP3425	※
7831250	PXDH2500-PC	25	XP3425	○
	PXDH2510-PC	25.1	XP3425	※
	PXDH2520-PC	25.2	XP3425	※
	PXDH2530-PC	25.3	XP3425	※
7831254	PXDH2540-PC	25.4	XP3425	○

# Phoenix


可换头式钻头  
Exchangeable Head Drill

## PXD刀头

Head

### Heads

#### ■适用刀头 Heads

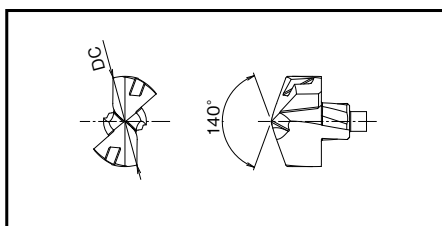

铸铁用(KC) For cast iron (KC)

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	直径 DC	材质 Grades	库存 Stock
7831440	PXDH1400-KC	14	XP1425	○
	PXDH1410-KC	14.1	XP1425	※
	① PXDH1420-KC	14.2	XP1425	※
	PXDH1430-KC	14.3	XP1425	※
	PXDH1440-KC	14.4	XP1425	※
7831445	PXDH1450-KC	14.5	XP1425	○
	PXDH1460-KC	14.6	XP1425	※
	② PXDH1470-KC	14.7	XP1425	※
	PXDH1480-KC	14.8	XP1425	※
	PXDH1490-KC	14.9	XP1425	※
7831450	PXDH1500-KC	15	XP1425	○
	PXDH1510-KC	15.1	XP1425	※
	PXDH1520-KC	15.2	XP1425	※
	PXDH1530-KC	15.3	XP1425	※
	③ PXDH1540-KC	15.4	XP1425	※
7831455	PXDH1550-KC	15.5	XP1425	○
	PXDH1560-KC	15.6	XP1425	※
	PXDH1570-KC	15.7	XP1425	※
	PXDH1580-KC	15.8	XP1425	※
	PXDH1590-KC	15.9	XP1425	※
7831460	PXDH1600-KC	16	XP1425	○
	PXDH1610-KC	16.1	XP1425	※
	PXDH1620-KC	16.2	XP1425	※
	PXDH1630-KC	16.3	XP1425	※
	PXDH1640-KC	16.4	XP1425	※
7831465	④ PXDH1650-KC	16.5	XP1425	○
	PXDH1660-KC	16.6	XP1425	※
7831467	PXDH1670-KC	16.7	XP1425	○
	PXDH1680-KC	16.8	XP1425	※
	PXDH1690-KC	16.9	XP1425	※

商品号 EDP No.	名称 Designation	直径 DC	材质 Grades	库存 Stock
7831470	PXDH1700-KC	17	XP1425	○
	PXDH1710-KC	17.1	XP1425	※
	PXDH1720-KC	17.2	XP1425	※
	PXDH1730-KC	17.3	XP1425	※
	PXDH1740-KC	17.4	XP1425	※
7831475	⑤ PXDH1750-KC	17.5	XP1425	○
	PXDH1760-KC	17.6	XP1425	※
	PXDH1770-KC	17.7	XP1425	※
	PXDH1780-KC	17.8	XP1425	※
	PXDH1790-KC	17.9	XP1425	※
7831480	PXDH1800-KC	18	XP1425	○
	PXDH1810-KC	18.1	XP1425	※
	PXDH1820-KC	18.2	XP1425	※
	PXDH1830-KC	18.3	XP1425	※
	⑥ PXDH1840-KC	18.4	XP1425	※
7831485	PXDH1850-KC	18.5	XP1425	○
	PXDH1860-KC	18.6	XP1425	※
7831487	PXDH1870-KC	18.7	XP1425	○
	PXDH1880-KC	18.8	XP1425	※
	PXDH1890-KC	18.9	XP1425	※
7831490	PXDH1900-KC	19	XP1425	○
	PXDH1910-KC	19.1	XP1425	※
	PXDH1920-KC	19.2	XP1425	※
	PXDH1930-KC	19.3	XP1425	※
	PXDH1940-KC	19.4	XP1425	※
7831495	⑦ PXDH1950-KC	19.5	XP1425	○
	PXDH1960-KC	19.6	XP1425	※
	PXDH1970-KC	19.7	XP1425	※
	PXDH1980-KC	19.8	XP1425	※
	PXDH1990-KC	19.9	XP1425	※

FROM

商品号 EDP No.	名称 Designation	直径 DC	材质 Grades	库存 Stock
7831500	PXDH2000-KC	20	XP1425	○
	PXDH2010-KC	20.1	XP1425	※
	PXDH2020-KC	20.2	XP1425	※
	PXDH2030-KC	20.3	XP1425	※
	PXDH2040-KC	20.4	XP1425	※
7831505	PXDH2050-KC	20.5	XP1425	○
	PXDH2060-KC	20.6	XP1425	※
7831507	PXDH2070-KC	20.7	XP1425	○
	PXDH2080-KC	20.8	XP1425	※
	PXDH2090-KC	20.9	XP1425	※
7831510	PXDH2100-KC	21	XP1425	○
	PXDH2110-KC	21.1	XP1425	※
	PXDH2120-KC	21.2	XP1425	※
	PXDH2130-KC	21.3	XP1425	※
	PXDH2140-KC	21.4	XP1425	※
7831515	PXDH2150-KC	21.5	XP1425	○
	PXDH2160-KC	21.6	XP1425	※
	PXDH2170-KC	21.7	XP1425	※
	PXDH2180-KC	21.8	XP1425	※
	PXDH2190-KC	21.9	XP1425	※
7831520	PXDH2200-KC	22	XP1425	○
	PXDH2210-KC	22.1	XP1425	※
	PXDH2220-KC	22.2	XP1425	※
	PXDH2230-KC	22.3	XP1425	※
7831524	PXDH2240-KC	22.4	XP1425	○
7831525	PXDH2250-KC	22.5	XP1425	○
	PXDH2260-KC	22.6	XP1425	※
	PXDH2270-KC	22.7	XP1425	※

蓝字 = 切削丝锥底孔 Blue = pre-drilled hole for cutting taps

对应螺纹名称推荐的底孔径请参照P.15。

Please see p.15 for recommended pre-drilled hole size.

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	直径 DC	材质 Grades	库存 Stock
	PXDH2280-KC	22.8	XP1425	※
	PXDH2290-KC	22.9	XP1425	※
7831530	PXDH2300-KC	23	XP1425	○
	PXDH2310-KC	23.1	XP1425	※
	PXDH2320-KC	23.2	XP1425	※
	PXDH2330-KC	23.3	XP1425	※
	PXDH2340-KC	23.4	XP1425	※
7831535	PXDH2350-KC	23.5	XP1425	○
	PXDH2360-KC	23.6	XP1425	※
	PXDH2370-KC	23.7	XP1425	※
	PXDH2380-KC	23.8	XP1425	※
	PXDH2390-KC	23.9	XP1425	※
7831540	PXDH2400-KC	24	XP1425	○
	PXDH2410-KC	24.1	XP1425	※
	PXDH2420-KC	24.2	XP1425	※
	PXDH2430-KC	24.3	XP1425	※
	PXDH2440-KC	24.4	XP1425	※
7831545	PXDH2450-KC	24.5	XP1425	○
	PXDH2460-KC	24.6	XP1425	※
	PXDH2470-KC	24.7	XP1425	※
	PXDH2480-KC	24.8	XP1425	※
	PXDH2490-KC	24.9	XP1425	※
7831550	PXDH2500-KC	25	XP1425	○
	PXDH2510-KC	25.1	XP1425	※
	PXDH2520-KC	25.2	XP1425	※
	PXDH2530-KC	25.3	XP1425	※
7831554	PXDH2540-KC	25.4	XP1425	○

# Phoenix


可换头式钻头  
Exchangeable Head Drill

## PXD刀头

Head

## Heads

### ■适用刀头 Heads

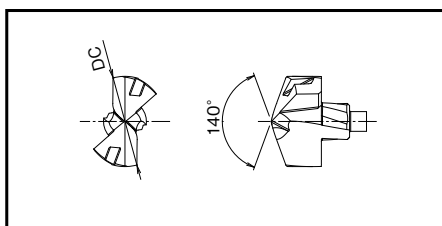

非铁用(NC) For non-ferrous metal (NC)

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	直径 DC	材质 Grades	库存 Stock
7831740	PXDH1400-NC	14	CF225	○
	PXDH1410-NC	14.1	CF225	※
	① PXDH1420-NC	14.2	CF225	※
	PXDH1430-NC	14.3	CF225	※
	PXDH1440-NC	14.4	CF225	※
7831745	PXDH1450-NC	14.5	CF225	○
	PXDH1460-NC	14.6	CF225	※
	② PXDH1470-NC	14.7	CF225	※
	PXDH1480-NC	14.8	CF225	※
	PXDH1490-NC	14.9	CF225	※
7831750	PXDH1500-NC	15	CF225	○
	PXDH1510-NC	15.1	CF225	※
	PXDH1520-NC	15.2	CF225	※
	PXDH1530-NC	15.3	CF225	※
	③ PXDH1540-NC	15.4	CF225	※
7831755	PXDH1550-NC	15.5	CF225	○
	PXDH1560-NC	15.6	CF225	※
	PXDH1570-NC	15.7	CF225	※
	PXDH1580-NC	15.8	CF225	※
	PXDH1590-NC	15.9	CF225	※
7831760	PXDH1600-NC	16	CF225	○
	PXDH1610-NC	16.1	CF225	※
	PXDH1620-NC	16.2	CF225	※
	PXDH1630-NC	16.3	CF225	※
	PXDH1640-NC	16.4	CF225	※
	④ PXDH1650-NC	16.5	CF225	○
	PXDH1660-NC	16.6	CF225	※
7831767	PXDH1670-NC	16.7	CF225	○
	PXDH1680-NC	16.8	CF225	※
	PXDH1690-NC	16.9	CF225	※

商品号 EDP No.	名称 Designation	直径 DC	材质 Grades	库存 Stock
7831770	PXDH1700-NC	17	CF225	○
	PXDH1710-NC	17.1	CF225	※
	PXDH1720-NC	17.2	CF225	※
	PXDH1730-NC	17.3	CF225	※
	PXDH1740-NC	17.4	CF225	※
	⑤ PXDH1750-NC	17.5	CF225	○
	PXDH1760-NC	17.6	CF225	※
	PXDH1770-NC	17.7	CF225	※
	PXDH1780-NC	17.8	CF225	※
	PXDH1790-NC	17.9	CF225	※
7831780	PXDH1800-NC	18	CF225	○
	PXDH1810-NC	18.1	CF225	※
	PXDH1820-NC	18.2	CF225	※
	PXDH1830-NC	18.3	CF225	※
	⑥ PXDH1840-NC	18.4	CF225	※
7831785	PXDH1850-NC	18.5	CF225	○
	PXDH1860-NC	18.6	CF225	※
7831787	PXDH1870-NC	18.7	CF225	○
	PXDH1880-NC	18.8	CF225	※
	PXDH1890-NC	18.9	CF225	※
7831790	PXDH1900-NC	19	CF225	○
	PXDH1910-NC	19.1	CF225	※
	PXDH1920-NC	19.2	CF225	※
	PXDH1930-NC	19.3	CF225	※
	PXDH1940-NC	19.4	CF225	※
	⑦ PXDH1950-NC	19.5	CF225	○
	PXDH1960-NC	19.6	CF225	※
	PXDH1970-NC	19.7	CF225	※
	PXDH1980-NC	19.8	CF225	※
	PXDH1990-NC	19.9	CF225	※

FROM

商品号 EDP No.	名称 Designation	直径 DC	材质 Grades	库存 Stock
7831800	PXDH2000-NC	20	CF225	○
	PXDH2010-NC	20.1	CF225	※
	PXDH2020-NC	20.2	CF225	※
	PXDH2030-NC	20.3	CF225	※
	PXDH2040-NC	20.4	CF225	※
7831805	PXDH2050-NC	20.5	CF225	○
	PXDH2060-NC	20.6	CF225	※
7831807	PXDH2070-NC	20.7	CF225	○
	PXDH2080-NC	20.8	CF225	※
	PXDH2090-NC	20.9	CF225	※
7831810	PXDH2100-NC	21	CF225	○
	PXDH2110-NC	21.1	CF225	※
	PXDH2120-NC	21.2	CF225	※
	PXDH2130-NC	21.3	CF225	※
	PXDH2140-NC	21.4	CF225	※
7831815	PXDH2150-NC	21.5	CF225	○
	PXDH2160-NC	21.6	CF225	※
	PXDH2170-NC	21.7	CF225	※
	PXDH2180-NC	21.8	CF225	※
	PXDH2190-NC	21.9	CF225	※
7831820	PXDH2200-NC	22	CF225	○
	PXDH2210-NC	22.1	CF225	※
	PXDH2220-NC	22.2	CF225	※
	PXDH2230-NC	22.3	CF225	※
7831824	PXDH2240-NC	22.4	CF225	○
7831825	PXDH2250-NC	22.5	CF225	○
	PXDH2260-NC	22.6	CF225	※
	PXDH2270-NC	22.7	CF225	※

蓝字 = 切削丝锥底孔 Blue = pre-drilled hole for cutting taps

对应螺纹名称推荐的底孔径请参照P.15。

Please see p.15 for recommended pre-drilled hole size.

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	直径 DC	材质 Grades	库存 Stock
	PXDH2280-NC	22.8	CF225	※
	PXDH2290-NC	22.9	CF225	※
7831830	PXDH2300-NC	23	CF225	○
	PXDH2310-NC	23.1	CF225	※
	PXDH2320-NC	23.2	CF225	※
	PXDH2330-NC	23.3	CF225	※
	PXDH2340-NC	23.4	CF225	※
7831835	PXDH2350-NC	23.5	CF225	○
	PXDH2360-NC	23.6	CF225	※
	PXDH2370-NC	23.7	CF225	※
	PXDH2380-NC	23.8	CF225	※
	PXDH2390-NC	23.9	CF225	※
7831840	PXDH2400-NC	24	CF225	○
	PXDH2410-NC	24.1	CF225	※
	PXDH2420-NC	24.2	CF225	※
	PXDH2430-NC	24.3	CF225	※
	PXDH2440-NC	24.4	CF225	※
7831845	PXDH2450-NC	24.5	CF225	○
	PXDH2460-NC	24.6	CF225	※
	PXDH2470-NC	24.7	CF225	※
	PXDH2480-NC	24.8	CF225	※
	PXDH2490-NC	24.9	CF225	※
7831850	PXDH2500-NC	25	CF225	○
	PXDH2510-NC	25.1	CF225	※
	PXDH2520-NC	25.2	CF225	※
	PXDH2530-NC	25.3	CF225	※
7831854	PXDH2540-NC	25.4	CF225	○

## Cutting Conditions


■ 切削条件基准表 Cutting Conditions

加工材料 Work Material	PC(钢用) For Steel						KC(铸铁用) For Cast Iron				NC(非铁用) For Non-ferrous Metal	
	软钢·低碳素钢 Mild Steel· Low Carbon Steel S3400, S10C ~150HB (~500N/mm <sup>2</sup> )		碳素钢 Carbon Steel S35C, S50C ~210HB (~710N/mm <sup>2</sup> )		合金钢 Alloy Steel SCM, SCr, SNCM 16 ~ 30HRC (710 ~ 950N/mm <sup>2</sup> )		铸铁 Cast Iron FC250 (~350N/mm <sup>2</sup> )		球墨铸铁 Ductile Cast Iron FCD450, FCD600 (400 ~ 600N/mm <sup>2</sup> )		铸造铝合金 Aluminum Alloy Casting AC4A, ADC	
切削速度 Cutting Speed	80~120m/min		80~120m/min		60~120m/min		80~120m/min		60~100m/min		80~180m/min	
直径 Drill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给量 Feed Rate (mm/rev)	转速 Speed (min <sup>-1</sup> )	进给量 Feed Rate (mm/rev)	转速 Speed (min <sup>-1</sup> )	进给量 Feed Rate (mm/rev)	转速 Speed (min <sup>-1</sup> )	进给量 Feed Rate (mm/rev)	转速 Speed (min <sup>-1</sup> )	进给量 Feed Rate (mm/rev)	转速 Speed (min <sup>-1</sup> )	进给量 Feed Rate (mm/rev)
14	2,300	0.21 ~ 0.35	2,300	0.21 ~ 0.35	2,000	0.21 ~ 0.35	2,300	0.21 ~ 0.35	1,800	0.21 ~ 0.35	3,000	0.28 ~ 0.42
15	2,100	0.23 ~ 0.38	2,100	0.23 ~ 0.38	1,900	0.23 ~ 0.38	2,100	0.23 ~ 0.38	1,700	0.23 ~ 0.38	2,800	0.3 ~ 0.45
16	2,000	0.24 ~ 0.4	2,000	0.24 ~ 0.4	1,800	0.24 ~ 0.4	2,000	0.24 ~ 0.4	1,600	0.24 ~ 0.4	2,600	0.32 ~ 0.48
17	1,900	0.26 ~ 0.43	1,900	0.26 ~ 0.43	1,700	0.26 ~ 0.43	1,900	0.26 ~ 0.43	1,500	0.26 ~ 0.43	2,400	0.34 ~ 0.51
18	1,800	0.27 ~ 0.45	1,800	0.27 ~ 0.45	1,600	0.27 ~ 0.45	1,800	0.27 ~ 0.45	1,400	0.27 ~ 0.45	2,300	0.36 ~ 0.54
19	1,700	0.29 ~ 0.48	1,700	0.29 ~ 0.48	1,500	0.29 ~ 0.48	1,700	0.29 ~ 0.48	1,300	0.29 ~ 0.48	2,200	0.38 ~ 0.57
20	1,600	0.3 ~ 0.5	1,600	0.3 ~ 0.5	1,400	0.3 ~ 0.5	1,600	0.3 ~ 0.5	1,300	0.3 ~ 0.5	2,100	0.4 ~ 0.6
21	1,500	0.32 ~ 0.53	1,500	0.32 ~ 0.53	1,400	0.32 ~ 0.53	1,500	0.32 ~ 0.53	1,200	0.32 ~ 0.53	2,000	0.42 ~ 0.63
22	1,400	0.33 ~ 0.55	1,400	0.33 ~ 0.55	1,300	0.33 ~ 0.55	1,400	0.33 ~ 0.55	1,200	0.33 ~ 0.55	1,900	0.44 ~ 0.66
23	1,400	0.35 ~ 0.58	1,400	0.35 ~ 0.58	1,200	0.35 ~ 0.58	1,400	0.35 ~ 0.58	1,100	0.35 ~ 0.58	1,800	0.46 ~ 0.69
24	1,300	0.36 ~ 0.6	1,300	0.36 ~ 0.6	1,200	0.36 ~ 0.6	1,300	0.36 ~ 0.6	1,100	0.36 ~ 0.6	1,700	0.48 ~ 0.72
25	1,300	0.38 ~ 0.63	1,300	0.38 ~ 0.63	1,100	0.38 ~ 0.63	1,300	0.38 ~ 0.63	1,000	0.38 ~ 0.63	1,700	0.5 ~ 0.75

1. 这张切削条件基准表是以水溶性切屑油剂作为内部供油。
2. 请使用稀释倍率20倍以下的优质水溶性切屑油剂。
3. 这张切削条件基准表的数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。
4. 请牢固固定加工材料，确保在没有变形、倾斜、振动的情况下加工。
5. 油孔堵塞是造成折损问题的原因，请务必安装供油装置的过滤器。
6. 刀头的安装方式及使用注意事项请参照P.28。
1. The indicated speeds and feeds are for using water-soluble oil with inner supply.
2. Suitable cutting fluid is water-soluble in high density (less than 20 times dilution).
3. The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.
4. Fasten the work material to reduce the possibility of work deformation, deflection of machined surface, or vibration.
5. A clogged oil hole can lead to a breakage. Make sure that a filter is attached to the oil feeder.
6. Please see p.28 for mounting procedure and precaution for machining.

## ■ 关于可换头式钻头的安装 Mounting Procedure

### ■ 安装顺序 Procedure



#### 第一步1 Step 1

请用气枪等清除接口处的污渍。

Clean attachment area with an air blower.

※如有残留切屑等，则无法正确安装，可能会导致刀头破损。

Any leftover cutting chips may prevent the head from being mounted properly and may cause damages to the tool.



#### 第二步2 Step 2

将刀头安装在接口处。

Attach the head manually.




#### 第三步3 Step 3

将专用螺丝刀的金属部分嵌入刀头的槽中。

Insert the flat metal portion of the designated driver into the groove of the head.

※请将专用螺丝刀完全嵌入槽的内部。如深度不够的情况下有可能会造成槽部破损。

Insert the designated driver firmly into the groove. If the insertion of the designated driver is shallow, it could damage the flutes.

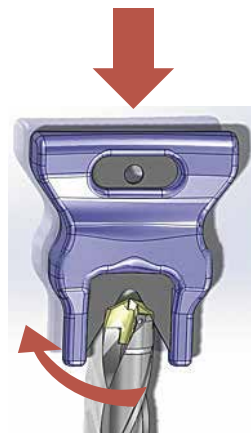

#### 第四步4 Step 4

将螺丝刀顺时针旋转，使刀头固定于刀体。

Turn the designated driver clockwise and mount the head onto the body.

※安装时，请确保刀头与刀体连接处没有间隙。

Mount head firmly and make sure that there is no gap between the head and the body.

### ■ 安装后的确认 After mounting



安装完成后，请用厚度计(20 $\mu$ m)确认标记部位(蓝、红)的间隙。

Make sure no clearance gap is found at places marked blue and red by using thickness gauges of 20 $\mu$ m.



如图，安装后出现间隙的情况下，请使用气枪清除接口处的污渍，再进行安装·确认。

If clearance gap is found, please mount and check again after cleaning the mounting area by air blow.

※刀体的嵌合力在一定程度以后将会到达使用寿命。如产生间隙、用手可直接拔出刀头的话，则已达到使用寿命。

If the clearance gap still remains or head can be took off without driver, body must be changed.

### ■ 使用上的注意 Precaution

#### ■ 由于PXD未使用紧固螺丝，因此必须用于接口处不易松动的加工环境。

The machining environment that won't loosen the mounting area is essential for PXD because no clamping screws are used.

#### 孔加工贯穿时请特别注意。

Extra caution is necessary for through holes.

- 在加工难以固定的薄板材料及易引起回弹的材料时，退刀时的回转进给请下调30%左右。
- 贯穿时的深度位置设定请参考右图。

- Reduce feed rate by 30% when pulling the drill out from the hole of thin plate without enough holding or material tend to spring back easily.
- Please refer photos on right for setting of through holes.



贯穿时的深度位置请设定在钻肩部2mm以下。

Head should be penetrated no more than 2mm from the shoulder of PXD.



# Phoenix

可换头式钻头  
Exchangeable Head Drill  
**PXD**

## 比以往的加工速度更快! Achieves faster feeds than ever before!

加工效率2倍以上! Double the efficiency!

	直径 Drill Dia.	加工材料 Work Material	切深量 Depth of Hole	切削速度 Cutting Speed (m/min)	转速 Speed (min <sup>-1</sup> )	进给量 Feed Rate (mm/rev)	进给速度 Feed (mm/min)	切削油剂 Coolant	使用机械 Machine
内冷油孔高速钢钻头 HSS Drill with Oil Hole	ø16	S50C	50mm	30	600	0.4	240	水溶性 切削油剂 Water-Soluble	卧式加工中心 Horizontal Machining Center
可转位式钻头 Indexable Drill				160	3,200	0.09	288		
<b>PXD</b>				100	1,990	0.3	<b>597</b>		

加工效率3倍以上! Triple the efficiency!

	直径 Drill Dia.	加工材料 Work Material	切深量 Depth of Hole	切削速度 Cutting Speed (m/min)	转速 Speed (min <sup>-1</sup> )	进给量 Feed Rate (mm/rev)	进给速度 Feed (mm/min)	切削油剂 Coolant	使用机械 Machine
内冷油空高速钢钻头 HSS Drill with Oil Hole	ø25	S50C	75mm	25	320	0.5	160	水溶性 切削油剂 Water-Soluble	卧式加工中心 Horizontal Machining Center
可转位式钻头 Indexable Drill				160	2,000	0.13	260		
<b>PXD</b>				100	1,270	0.5	<b>635</b>		


## 加工效率·使用寿命提高! 加工成本大幅下降!

Greater tool life and efficiency while significantly lowering cost!

直径: ø16  
Drill Diameter:  
使用机械: 卧式加工中心  
Machine: Horizontal Machining Center

切深量: 50mm  
Depth of Hole:  
切削油剂: 水溶性切削油剂  
Coolant: Water-Soluble

加工材料 Work Material	SS400		S50C	
	切削速度 Cutting Speed (m/min)	进给量 Feed Rate (mm/rev)	切削速度 Cutting Speed (m/min)	进给量 Feed Rate (mm/rev)
<b>PXD</b>	100	0.3	100	0.3
其他公司可转位式钻头 Competitor's Indexable Drill	200	0.1	160	0.1
其他公司高速钢钻头 Competitor's HSS Drill	30	0.3	30	0.3

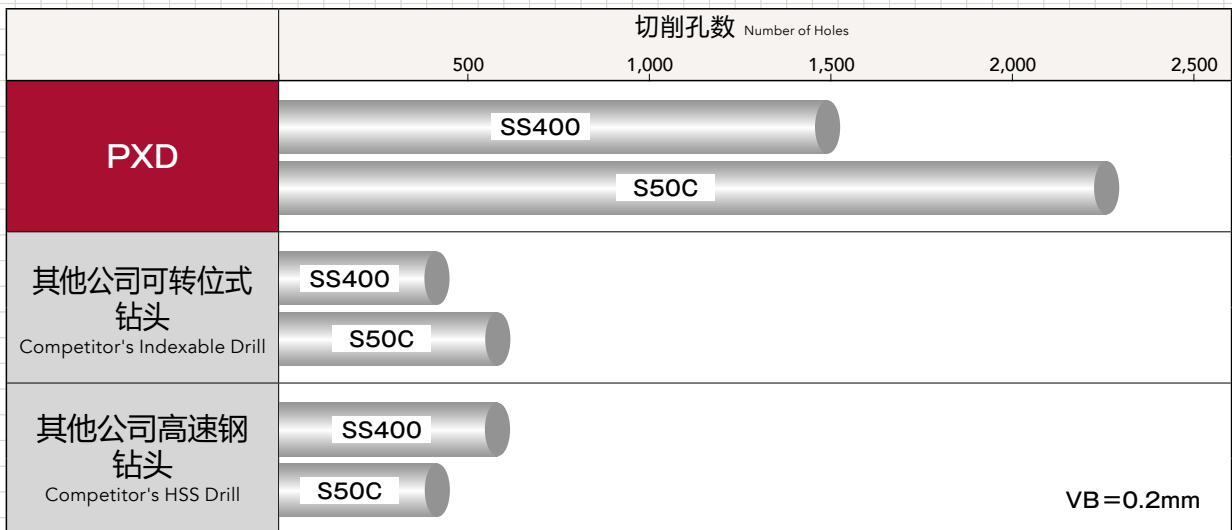

# Cutting Data

加工数据 Cutting Data

挤压丝锥的底孔也可用PXD 3D! PXD 3D drill adequate pre-drilled holes for forming taps

## 钻孔 Drilling

使用工具 Tool	PXDZ220-3D-158.5-32 (φ22.4)
使用刀头(材质) Head (grade)	PXDH2240-PC
加工材料 Work Material	S50C
切削速度 Cutting Speed	70m/min (995min <sup>-1</sup> )
进给速度 Feed	597mm/min (0.6mm/rev)
切深量 Depth of Hole	112mm (盲孔) (Blind)
切削油剂 Coolant	水溶性切削油剂 Water-Soluble
使用机械 Machine	卧式加工中心 Horizontal Machining Center



## 攻丝 Tapping



使用工具 Tool	挤压丝锥 S-XP M24×3 Forming Tap
加工材料 Work Material	S50C
攻丝深度 Tapping Length	48mm (2D) (盲孔) (Blind)
切削速度 Cutting Speed	15m/min (199min <sup>-1</sup> )
切削油剂 Coolant	水溶性切削油剂 Water-Soluble
使用机械 Machine	卧式加工中心 Horizontal Machining Center



※请使用PXD 3D 加工挤压丝锥底孔。  
For pre-drilled hole of forming tap, 3D type should be used (5D is not recommended).

SS400的长寿命加工 Long tool life in SS400

使用工具 Tool	PXDZ160-3D-123.5-20 (φ16)
使用刀头(材质) Head (grade)	PXDH1600-PC
加工材料 Work Material	SS400
切削速度 Cutting Speed	100m/min (1,990min <sup>-1</sup> )
进给速度 Feed	597mm/min (0.3mm/rev)
切深量 Depth of Hole	45mm (通孔) (Through)
切削油剂 Coolant	水溶性切削油剂 Water-Soluble
使用机械 Machine	卧式加工中心 Horizontal Machining Center

	切削孔数 Number of Holes		
	500	1,000	1,500
<b>PXD</b>			
以往的硬质合金钻头 Conventional Carbide Drill			

大径加工时, 根据加工环境, 可以得到整体硬质合金钻头以上的寿命。合理区分使用整体硬质合金钻头和可换头式钻头可有效的降低加工成本。

Higher durability may be achieved than conventional carbide drills depending on the working environment. Optimal, low-cost drilling is possible by properly selected carbide solid drills and exchangeable head drills.

# Cutting Data


加工数据 Cutting Data

## SS400的长寿命加工 Long tool life in SS400

使用工具 Tool	PXDZ160-3D-123.5-20 (φ16)	
使用刀头(材质) Head (grade)	PXDH1600-PC	
加工材料 Work Material	SS400	
切削速度 Cutting Speed	100m/min (1,990min <sup>-1</sup> )	
进给速度 Feed	597mm/min (0.3mm/rev)	
切深量 Depth of Hole	45mm (通孔) (Through)	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心 Horizontal Machining Center	

在加工SS400时，专用的WDI涂层能抑制磨损、着卷，使用寿命约为其他公司产品的1.8倍。

When drilling in SS400, OSG's proprietary WDI coating minimized tool wear and permitting 1.8 times the tool life versus the competition.

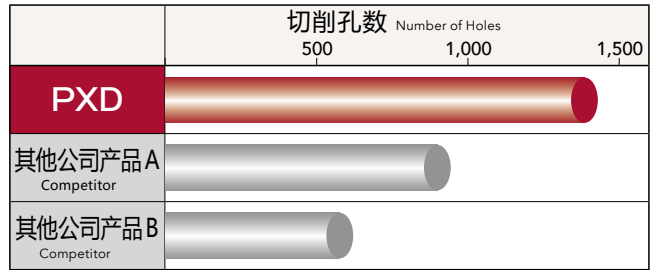

加工900孔时的磨损比较 Wear comparison after 900 holes of drilling




## 专用刀头的铸件加工 Exchangeable head for cast iron

使用工具 Tool	PXDZ160-3D-123.5-20 (φ16)	
使用刀头(材质) Head (grade)	PXDH1600-KC	
加工材料 Work Material	FC250	FCD600
切削速度 Cutting Speed	100m/min (1,990min <sup>-1</sup> )	80m/min (1,600min <sup>-1</sup> )
进给速度 Feed	796mm/min (0.4mm/rev)	480mm/min (0.3mm/rev)
切深量 Depth of Hole	45mm (通孔) (Through)	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心 Horizontal Machining Center	

使用铸铁专用刀头可实现较长使用寿命。

This exchangeable head is designated for cast iron and can maintain long tool life.

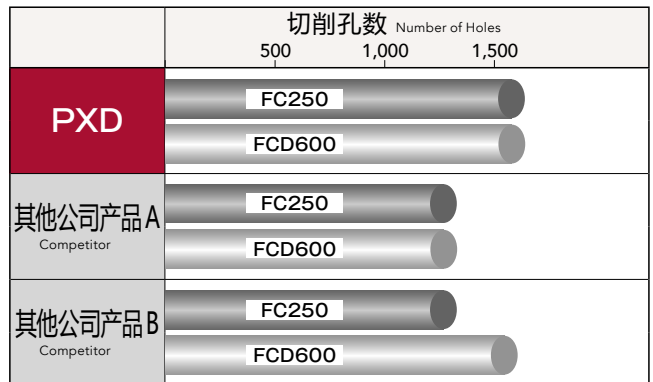

[FC250] 加工1,280孔时的磨损比较 Wear comparison after 1,280 holes of drilling



[FCD600] 加工1,600孔时的磨损比较 Wear comparison after 1,600 holes of drilling




## φ20的高效率加工 Highly efficient drilling at φ20

使用工具 Tool	PXDZ200-3D-146.5-25 (φ20)	
使用刀头(材质) Head (grade)	PXDH2000-PC	
加工材料 Work Material	S50C	
切削速度 Cutting Speed	100m/min (1,590min <sup>-1</sup> )	
进给速度 Feed	637mm/min (0.4mm/rev)	
切深量 Depth of Hole	50mm (通孔) (Through)	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心 Horizontal Machining Center	

即使是φ20，也能高效率加工，因专用的WDI涂层得以实现较长的使用寿命。

OSG's WDI coating has enabled the PXD to achieve long tool life and high efficiency when drilling holes of φ20.

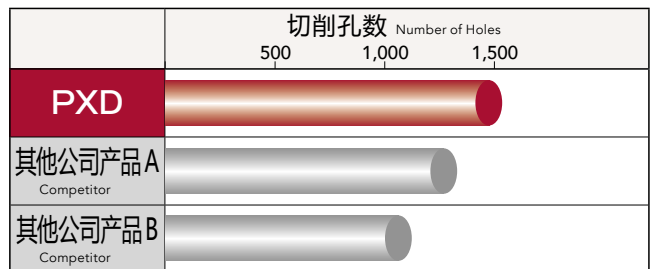


加工1,000孔时的磨损比较 Wear comparison after 1,000 holes of drilling



## S50C 的高能率加工(孔深5D) Highly efficient drilling in S50C (drilling depth 5xD)

使用工具 Tool	PXDZ160-5D-155.5-20 (φ16)
使用刀头(材质) Head (grade)	PXDH1600-PC
加工材料 Work Material	S50C
切削速度 Cutting Speed	100m/min (1,990min <sup>-1</sup> )
进给速度 Feed	597mm/min (0.3mm/rev)
切深量 Depth of Hole	80mm (通孔) (Blind)
切削油剂 Coolant	水溶性切削油剂 Water-Soluble
使用机械 Machine	卧式加工中心 Horizontal Machining Center

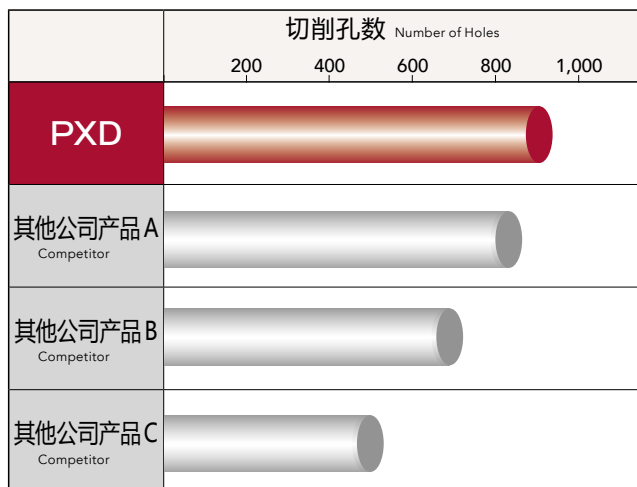

即使是5D的深孔加工时,也能实现与硬质合金钻头相同的加工效率。另、与其他公司产品相比,使用寿命更长。

Even when drilling hole depth of 5xD, the PXD achieved at the same level of efficiency as a carbide drill. Moreover, it had the best tool life versus the competitions.

## 加工700孔时的磨损比较 Wear comparison after 750 holes of drilling



### 可定制带沉孔、带倒角等结合加工环境的非标品。详情请咨询本公司销售。

Custom tooling with specifications such as counterboring and chamfering are available upon request. Please contact your local sales representative for details.



**带沉孔 PXD 钻头(非标品)**  
PXD with Counterboring (Special)




**带倒角 PXD 钻头(非标品)**  
PXD with Chamfering (Special)

# » Phoenix PD

可转位式钻头  
Indexable Drill

Phoenix Drill

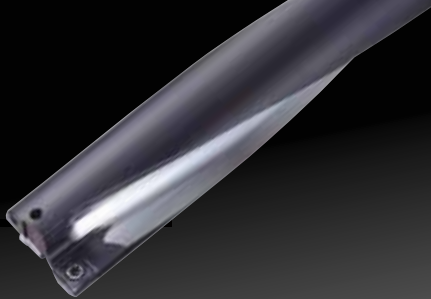

## ■ 特点 Features

高刚性的沟槽设计加上高精度精加工，进一步提高切屑排出性！ **PAT. in Japan**

High precision finishing on flute improves rigidity, chip ejection and reduces cutting force!

刀体含有断屑槽，可将切屑细小分断

Optimized groove on the body tip helps to lead chips to the flute smoothly.



内部给油  
可以提高加工效率

The internal coolant system enables highly efficient drilling.

最优化的刀片排列方式，实现高进给条件

High feed drilling is possible by sequential balance of inserts.

外周刃·中心刃使用同一款四角式样刀片，经济且管理便利。(XCMT03为2角式样)

Economical 4-corner insert design maximizes cost efficiency, with the same insert applicable to both center and peripheral cutting edge. (XCMT03: 2-corner insert)



**NEW**

追求更长耐久性加工请选择外周刃专用刀片！

The peripheral insert is recommended for maximum durability!

## 多种刀片可对应广泛的加工材料。

Broad lineup to accommodate a wide range of materials




### 钢用·不锈钢加工用(DM)

for Steel and Stainless Steel

## XP9020

- 锋利性及强度兼备的形状
- 钢材、不锈钢加工中发挥优异性能
- Well balanced insert with sharpness and rigidity
- Optimal for steel and stainless steels




### 铸铁用(DR)

for Cast Iron

## XP1010

- 刃尖强度优良的形状
- 铸铁加工中发挥优异性能
- Strong cutting edge acquired by rake angle and land
- Optimal for cast iron



### 铝合金·非铁合金用(DN)


for Aluminum Alloy and Non-ferrous Metal

## CK110

- 锋利的切削刃和抛光处理，排屑性优良的形状
- 铝合金·非铁合金加工中发挥优异性能
- Excellent chip evacuation is acquired by sharp cutting edges and polishing treatment
- Optimal for aluminum alloy and non-ferrous metal

## 追求更长耐久性加工请选择外周刃专用刀片!

The peripheral insert is recommended for maximum durability!



### 外周刃专用刀片(DM)

Inserts for Peripheral Cutting Edge

## XC9015

- 强韧的硬质合金母材和厚膜CVD涂层，耐磨损性优良
- 钢、铸铁加工中可发挥优异的性能
- Excellent abrasion resistance with the robust carbide base metal and thick layered CVD coating
- Excellent performance in steel and cast iron applications



贴有专用标签  
Indicating label

## 可进行车削粗加工


Rough process of turning is also possible

### 车内圆加工

Turning internal diameter

工件正传(钻头=固定)

Normal rotation  
(Drill=Fixed)




### 车外圆加工

Turning outer diameter

工件逆转(钻头=固定)

Reverse rotation  
(Drill=Fixed)




# Phoenix

可转位式钻头


Indexable Drill

## P2D




## Specification

■形状尺寸表 Specification

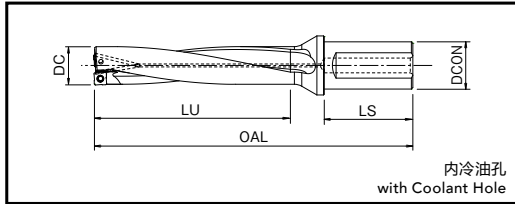

■加工径最大调整量 Max Offset Amount of Effective Dia.



单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	全长 OAL	有效加工深度 LU	柄径 DCON	柄长 LS	最大偏移量 ADJLX	最大加工径 DCX	适用刀片 Applicable Inserts
<b>NEW</b> 7803180	P2D1200FS20M03	12	87	24	20	50	0.4	12.8	①
<b>NEW</b> 7803181	P2D1250FS20M03	12.5	88	25	20	50	0.4	13.3	
<b>NEW</b> 7803182	P2D1300FS20M03	13	89	26	20	50	0.3	13.6	
<b>NEW</b> 7803183	P2D1350FS20M03	13.5	90	27	20	50	0.2	13.9	
<b>NEW</b> 7803184	P2D1400FS20M03	14	91	28	20	50	0.2	14.4	
<b>NEW</b> 7803185	P2D1450FS20M03	14.5	92	29	20	50	0.1	14.7	②
7803117	P2D1500FS20M04	15	95	30	20	50	0.4	15.8	
7803118	P2D1550FS20M04	15.5	96	31	20	50	0.3	16.1	
7803119	P2D1600FS20M04	16	97	32	20	50	0.3	16.6	
7803120	P2D1650FS20M04	16.5	98	33	20	50	0.3	17.1	
7803121	P2D1700FS20M05	17	102	34	20	50	0.6	18.2	③
7803122	P2D1750FS20M05	17.5	103	35	20	50	0.5	18.5	
7803190	P2D1750FS25M05		109		25	56			
7803123	P2D1800FS25M05	18	110	36	25	56	0.5	19.0	
7803124	P2D1850FS25M05	18.5	111	37	25	56	0.4	19.3	
7803125	P2D1900FS25M06	19	112	38	25	56	0.6	20.2	④
7803126	P2D1950FS25M06	19.5	113	39	25	56	0.5	20.5	
7803127	P2D2000FS25M06	20	114	40	25	56	0.4	20.8	
7803128	P2D2050FS25M06	20.5	115	41	25	56	0.4	21.3	
7803129	P2D2100FS25M07	21	121	42	25	56	0.6	22.2	
7803130	P2D2150FS25M07	21.5	122	43	25	56	0.6	22.7	⑤
7803131	P2D2200FS25M07	22	123	44	25	56	0.5	23.0	
7803132	P2D2250FS25M07	22.5	124	45	25	56	0.5	23.5	
7803133	P2D2300FS25M07	23	125	46	25	56	0.4	23.8	
7803191	P2D2350FS25M07	23.5	126	47	25	56	0.3	24.1	
7803134	P2D2350FS32M07		130		32	60			
7803192	P2D2400FS25M07	24	127	48	25	56	0.3	24.6	
7803135	P2D2400FS32M07		131		32	60			
7803193	P2D2450FS25M07		24.5		128	49			
7803136	P2D2450FS32M07	132		32	60				

FROM

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	全长 OAL	有效加工深度 LU	柄径 DCON	柄长 LS	最大偏移量 ADJLX	最大加工径 DCX	适用刀片 Applicable Inserts
7803194	P2D2500FS25M08	25	129	50	25	56	0.7	26.4	⑥
7803137	P2D2500FS32M08		133		32	60			
7803195	P2D2550FS25M08	25.5	130	51	25	56	0.6	26.7	
7803138	P2D2550FS32M08		134		32	60			
7803139	P2D2600FS32M08	26	135	52	32	60	0.5	27.0	
7803140	P2D2650FS32M08	26.5	136	53	32	60	0.5	27.5	
7803141	P2D2700FS32M08	27	137	54	32	60	0.4	27.8	
7803142	P2D2800FS32M08	28	139	56	32	60	0.3	28.6	
7803143	P2D2850FS32M08	28.5	140	57	32	60	0.2	28.9	
7803144	P2D2900FS32M09	29	141	58	32	60	0.8	30.6	
7803145	P2D3000FS32M09	30	143	60	32	60	0.7	31.4	
7803146	P2D3100FS32M09	31	145	62	32	60	0.6	32.2	⑦
7803196	P2D3100FS40M09		155		40	70			
7803147	P2D3200FS32M09	32	147	64	32	60	0.5	33.0	
7803197	P2D3200FS40M09		157		40	70			
7803148	P2D3300FS40M09	33	159	66	40	70	0.4	33.8	
7803149	P2D3350FS40M09	33.5	160	67	40	70	0.2	33.9	
7803150	P2D3400FS40M10	34	161	68	40	70	1.1	36.2	
7803151	P2D3500FS40M10	35	163	70	40	70	0.8	36.6	⑧
7803152	P2D3600FS40M10	36	165	72	40	70	0.8	37.6	
7803153	P2D3700FS40M10	37	167	74	40	70	0.6	38.2	
7803154	P2D3800FS40M10	38	169	76	40	70	0.3	38.6	
7803155	P2D3900FS40M12	39	178	78	40	70	1.0	41.0	⑨
7803156	P2D4000FS40M12	40	180	80	40	70	0.9	41.8	
7803157	P2D4100FS40M12	41	182	82	40	70	0.8	42.6	
7803158	P2D4200FS40M12	42	184	84	40	70	0.6	43.2	
7803159	P2D4300FS40M12	43	186	86	40	70	0.5	44.0	
7803160	P2D4400FS40M12	44	188	88	40	70	0.3	44.6	
7803161	P2D4500FS40M13	45	190	90	40	70	0.9	46.8	⑩
7803162	P2D4600FS40M13	46	192	92	40	70	0.8	47.6	
7803163	P2D4700FS40M13	47	194	94	40	70	0.7	48.4	
7803164	P2D4800FS40M13	48	196	96	40	70	0.5	49.0	
7803165	P2D4900FS40M13	49	198	98	40	70	0.3	49.6	
7803166	P2D5000FS40M14	50	200	100	40	70	1.1	52.2	
7803167	P2D5100FS40M14	51	202	102	40	70	1.0	53.0	⑪
7803168	P2D5200FS40M14	52	204	104	40	70	0.8	53.6	
7803169	P2D5300FS40M14	53	206	106	40	70	0.7	54.4	
7803170	P2D5400FS40M14	54	208	108	40	70	0.6	55.2	
7803171	P2D5500FS40M14	55	210	110	40	70	0.4	55.8	⑫
7803172	P2D5600FS40M14	56	212	112	40	70	0.1	56.2	
7803173	P2D5700FS40M16	57	214	114	40	70	1.1	59.2	
7803174	P2D5800FS40M16	58	216	116	40	70	1.0	60.0	
7803175	P2D5900FS40M16	59	218	118	40	70	0.9	60.8	
7803176	P2D6000FS40M16	60	220	120	40	70	0.8	61.6	
7803177	P2D6100FS40M16	61	222	122	40	70	0.6	62.2	
7803178	P2D6200FS40M16	62	224	124	40	70	0.4	62.8	
7803179	P2D6300FS40M16	63	226	126	40	70	0.2	63.4	


蓝字 = 切削丝锥底孔 Blue = pre-drilled hole for cutting taps  
 对应螺纹尺寸的推荐底孔直径请参照p.16.  
 Please see p.16 for recommended pre-drilled hole size.

库存种类都为○(即标准库存品) Stock are categorized as ○ (Standard stock item).

# Phoenix


可转位式钻头  
Indexable Drill

## P3D




## Specification

■ 形状尺寸表 Specification

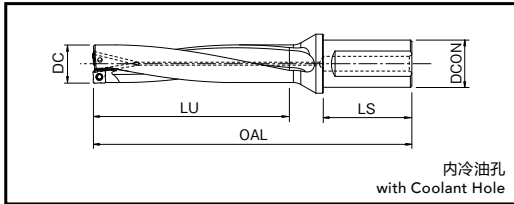

■ 加工径最大调整量 Max Offset Amount of Effective Dia.



单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	全长 OAL	有效加工深度 LU	柄径 DCON	柄长 LS	最大偏移量 ADJLX	最大加工径 DCX	适用刀片 Applicable Inserts
NEW 7803210	P3D1200FS20M03	12	99	36	20	50	0.4	12.8	①
NEW 7803211	P3D1250FS20M03	12.5	100.5	37.5	20	50	0.4	13.3	
NEW 7803212	P3D1270FS20M03	12.7	101.1	38.1	20	50	0.3	13.3	
NEW 7803213	P3D1300FS20M03	13	102	39	20	50	0.3	13.6	
NEW 7803214	P3D1350FS20M03	13.5	103.5	40.5	20	50	0.2	13.9	
NEW 7803215	P3D1400FS20M03	14	105	42	20	50	0.2	14.4	
NEW 7803216	P3D1450FS20M03	14.5	106.5	43.5	20	50	0.1	14.7	②
7803217	P3D1500FS20M04	15	110	45	20	50	0.4	15.8	
7803218	P3D1550FS20M04	15.5	112	47	20	50	0.3	16.1	
7803219	P3D1600FS20M04	16	113	48	20	50	0.3	16.6	
7803220	P3D1650FS20M04	16.5	115	50	20	50	0.3	17.1	
7803221	P3D1700FS20M05	17	119	51	20	50	0.6	18.2	
7803222	P3D1750FS20M05	17.5	121	53	20	50	0.5	18.5	③
7803290	P3D1750FS25M05		127		25	56			
7803223	P3D1800FS25M05	18	128	54	25	56	0.5	19.0	
7803224	P3D1850FS25M05	18.5	130	56	25	56	0.4	19.3	
7803225	P3D1900FS25M06	19	131	57	25	56	0.6	20.2	
7803226	P3D1950FS25M06	19.5	133	59	25	56	0.5	20.5	
7803227	P3D2000FS25M06	20	134	60	25	56	0.4	20.8	
7803228	P3D2050FS25M06	20.5	136	62	25	56	0.4	21.3	
7803229	P3D2100FS25M07	21	142	63	25	56	0.6	22.2	
7803230	P3D2150FS25M07	21.5	144	65	25	56	0.6	22.7	
7803231	P3D2200FS25M07	22	145	66	25	56	0.5	23.0	
7803232	P3D2250FS25M07	22.5	147	68	25	56	0.5	23.5	
7803233	P3D2300FS25M07	23	148	69	25	56	0.4	23.8	
7803291	P3D2350FS25M07	23.5	150	71	25	56	0.3	24.1	⑤
7803234	P3D2350FS32M07		154		32	60			
7803292	P3D2400FS25M07	24	151	72	25	56	0.3	24.6	
7803235	P3D2400FS32M07		155		32	60			
7803293	P3D2450FS25M07	24.5	153	74	25	56	0.2	24.9	
7803236	P3D2450FS32M07		157		32	60			
7803294	P3D2500FS25M08	25	154	75	25	56	0.7	26.4	
7803237	P3D2500FS32M08		158		32	60			
7803295	P3D2550FS25M08	25.5	156	77	25	56	0.6	26.7	
7803238	P3D2550FS32M08		160		32	60			
7803239	P3D2600FS32M08	26	161	78	32	60	0.5	27.0	
7803240	P3D2650FS32M08	26.5	163	80	32	60	0.5	27.5	
7803241	P3D2700FS32M08	27	164	81	32	60	0.4	27.8	
7803300	P3D2750FS32M08	27.5	166	83	32	60	0.4	28.3	
7803242	P3D2800FS32M08	28	167	84	32	60	0.3	28.6	
7803243	P3D2850FS32M08	28.5	169	86	32	60	0.2	28.9	

FROM

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	全长 OAL	有效加工深度 LU	柄径 DCON	柄长 LS	最大偏移量 ADJLX	最大加工径 DCX	适用刀片 Applicable Inserts
7803244	P3D2900FS32M09	29	170	87	32	60	0.8	30.6	⑦
7803301	P3D2950FS32M09	29.5	172	89	32	60	0.8	31.1	
7803245	P3D3000FS32M09	30	173	90	32	60	0.7	31.4	
7803302	P3D3050FS32M09	30.5	175	92	32	60	0.7	31.9	
7803246	P3D3100FS32M09	31	176	93	32	60	0.6	32.2	
7803296	P3D3100FS40M09		186		40	70			
7803303	P3D3150FS32M09	31.5	178	95	32	60	0.5	32.5	
7803247	P3D3200FS32M09	32	179	96	32	60	0.5	33.0	
7803297	P3D3200FS40M09		189		40	70			
7803304	P3D3250FS40M09	32.5	191	98	40	70	0.4	33.3	
7803248	P3D3300FS40M09	33	192	99	40	70	0.4	33.8	
7803249	P3D3350FS40M09	33.5	194	101	40	70	0.2	33.9	
7803250	P3D3400FS40M10	34	195	102	40	70	1.1	36.2	
7803305	P3D3450FS40M10	34.5	197	104	40	70	0.9	36.3	
7803251	P3D3500FS40M10	35	198	105	40	70	0.8	36.6	
7803306	P3D3550FS40M10	35.5	200	107	40	70	0.7	36.9	
7803252	P3D3600FS40M10	36	201	108	40	70	0.8	37.6	
7803253	P3D3700FS40M10	37	204	111	40	70	0.6	38.2	
7803307	P3D3750FS40M10	37.5	206	113	40	70	0.4	38.3	
7803254	P3D3800FS40M10	38	207	114	40	70	0.3	38.6	
7803255	P3D3900FS40M12	39	217	117	40	70	1.0	41.0	
7803256	P3D4000FS40M12	40	220	120	40	70	0.9	41.8	
7803308	P3D4050FS40M12	40.5	222	122	40	70	0.8	42.1	
7803257	P3D4100FS40M12	41	223	123	40	70	0.8	42.6	
7803258	P3D4200FS40M12	42	226	126	40	70	0.6	43.2	
7803259	P3D4300FS40M12	43	229	129	40	70	0.5	44.0	
7803260	P3D4400FS40M12	44	232	132	40	70	0.3	44.6	
7803261	P3D4500FS40M13	45	235	135	40	70	0.9	46.8	
7803262	P3D4600FS40M13	46	238	138	40	70	0.8	47.6	
7803263	P3D4700FS40M13	47	241	141	40	70	0.7	48.4	
7803264	P3D4800FS40M13	48	244	144	40	70	0.5	49.0	
7803265	P3D4900FS40M13	49	247	147	40	70	0.3	49.6	
7803266	P3D5000FS40M14	50	250	150	40	70	1.1	52.2	
7803309	P3D5050FS40M14	50.5	252	152	40	70	1.0	52.5	
7803267	P3D5100FS40M14	51	253	153	40	70	1.0	53.0	
7803268	P3D5200FS40M14	52	256	156	40	70	0.8	53.6	
7803269	P3D5300FS40M14	53	259	159	40	70	0.7	54.4	
7803270	P3D5400FS40M14	54	262	162	40	70	0.6	55.2	
7803271	P3D5500FS40M14	55	265	165	40	70	0.4	55.8	
7803272	P3D5600FS40M14	56	268	168	40	70	0.1	56.2	
7803273	P3D5700FS40M16	57	271	171	40	70	1.1	59.2	
7803274	P3D5800FS40M16	58	274	174	40	70	1.0	60.0	
7803275	P3D5900FS40M16	59	277	177	40	70	0.9	60.8	
7803276	P3D6000FS40M16	60	280	180	40	70	0.8	61.6	
7803277	P3D6100FS40M16	61	283	183	40	70	0.6	62.2	
7803278	P3D6200FS40M16	62	286	186	40	70	0.4	62.8	
7803279	P3D6300FS40M16	63	289	189	40	70	0.2	63.4	
									⑩
									⑪
									⑫

蓝字 = 切削丝锥底孔 Blue = pre-drilled hole for cutting taps  
 对应螺纹尺寸的推荐底孔径请参照p.16.  
 Please see p.16 for recommended pre-drilled hole size.


库存种类都为○(即标准库存品) Stock are categorized as ○ (Standard stock item).

# Phoenix

可转位式钻头


Indexable Drill

## P4D




## Specification

■形状尺寸表 Specification

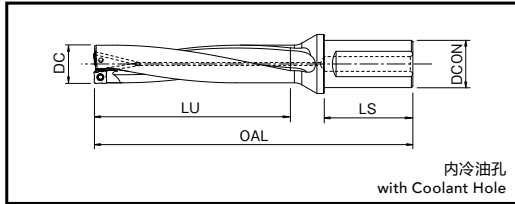

■加工径最大调整量 Max Offset Amount of Effective Dia.



单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	全长 OAL	有效加工深度 LU	柄径 DCON	柄长 LS	最大偏移量 ADJLX	最大加工径 DCX	适用刀片 Applicable Inserts	
<b>NEW</b> 7803311	P4D1200FS20M03	12	111	48	20	50	0.4	12.8	①	
<b>NEW</b> 7803312	P4D1250FS20M03	12.5	113	50	20	50	0.4	13.3		
<b>NEW</b> 7803313	P4D1300FS20M03	13	115	52	20	50	0.3	13.6		
<b>NEW</b> 7803314	P4D1350FS20M03	13.5	117	54	20	50	0.2	13.9		
<b>NEW</b> 7803315	P4D1400FS20M03	14	119	56	20	50	0.2	14.4		
<b>NEW</b> 7803316	P4D1450FS20M03	14.5	121	58	20	50	0.1	14.7	②	
7803317	P4D1500FS20M04	15	125	60	20	50	0.4	15.8		
7803318	P4D1550FS20M04	15.5	127	62	20	50	0.3	16.1		
7803319	P4D1600FS20M04	16	129	64	20	50	0.3	16.6		
7803320	P4D1650FS20M04	16.5	131	66	20	50	0.3	17.1		
7803321	P4D1700FS20M05	17.5	136	68	20	50	0.6	18.2	③	
7803322	P4D1750FS20M05		138	70	20	50	0.5	18.5		
7803390	P4D1750FS25M05	144	25	56	0.5	18.5	④			
7803323	P4D1800FS25M05	18	146	72	25	56		0.5		19.0
7803324	P4D1850FS25M05	18.5	148	74	25	56		0.4		19.3
7803325	P4D1900FS25M06	19	150	76	25	56		0.6	20.2	
7803326	P4D1950FS25M06	19.5	152	78	25	56	0.5	20.5	⑤	
7803327	P4D2000FS25M06	20	154	80	25	56	0.4	20.8		
7803328	P4D2050FS25M06	20.5	156	82	25	56	0.4	21.3		
7803329	P4D2100FS25M07	21	163	84	25	56	0.6	22.2		
7803330	P4D2150FS25M07	21.5	165	86	25	56	0.6	22.7	⑤	
7803331	P4D2200FS25M07	22	167	88	25	56	0.5	23.0		
7803332	P4D2250FS25M07	22.5	169	90	25	56	0.5	23.5		
7803333	P4D2300FS25M07	23	171	92	25	56	0.4	23.8		
7803391	P4D2350FS25M07	23.5	173	94	25	56	0.3	24.1		
7803334	P4D2350FS32M07		177		32	60				
7803392	P4D2400FS25M07	24	175	96	25	56	0.3	24.6		
7803335	P4D2400FS32M07		179		32	60				
7803393	P4D2450FS25M07	24.5	177	98	25	56	0.2	24.9		
7803336	P4D2450FS32M07		181		32	60				

FROM

单位:mm Unit:mm


商品号 EDP No.	名称 Designation	外径 DC	全长 OAL	有效加工深度 LU	柄径 DCON	柄长 LS	最大偏移量 ADJLX	最大加工径 DCX	适用刀片 Applicable Inserts
7803394	P4D2500FS25M08	25	179	100	25	56	0.7	26.4	⑥
7803337	P4D2500FS32M08		183		32	60			
7803395	P4D2550FS25M08	25.5	181	102	25	56	0.6	26.7	
7803338	P4D2550FS32M08		185		32	60			
7803339	P4D2600FS32M08	26	187	104	32	60	0.5	27.0	
7803340	P4D2650FS32M08	26.5	189	106	32	60	0.5	27.5	
7803341	P4D2700FS32M08	27	191	108	32	60	0.4	27.8	
7803342	P4D2800FS32M08	28	195	112	32	60	0.3	28.6	
7803343	P4D2850FS32M08	28.5	197	114	32	60	0.2	28.9	
7803344	P4D2900FS32M09	29	199	116	32	60	0.8	30.6	
7803345	P4D3000FS32M09	30	203	120	32	60	0.7	31.4	
7803346	P4D3100FS32M09	31	207	124	32	60	0.6	32.2	⑦
7803396	P4D3100FS40M09		217		40	70			
7803347	P4D3200FS32M09	32	211	128	32	60	0.5	33.0	
7803397	P4D3200FS40M09		221		40	70			
7803348	P4D3300FS40M09	33	225	132	40	70	0.4	33.8	
7803349	P4D3350FS40M09	33.5	227	134	40	70	0.2	33.9	
7803350	P4D3400FS40M10	34	229	136	40	70	1.1	36.2	
7803351	P4D3500FS40M10	35	233	140	40	70	0.8	36.6	
7803352	P4D3600FS40M10	36	237	144	40	70	0.8	37.6	
7803353	P4D3700FS40M10	37	241	148	40	70	0.6	38.2	
7803354	P4D3800FS40M10	38	245	152	40	70	0.3	38.6	
7803355	P4D3900FS40M12	39	256	156	40	70	1.0	41.0	
7803356	P4D4000FS40M12	40	260	160	40	70	0.9	41.8	
7803357	P4D4100FS40M12	41	264	164	40	70	0.8	42.6	
7803358	P4D4200FS40M12	42	268	168	40	70	0.6	43.2	
7803359	P4D4300FS40M12	43	272	172	40	70	0.5	44.0	
7803360	P4D4400FS40M12	44	276	176	40	70	0.3	44.6	
7803361	P4D4500FS40M13	45	280	180	40	70	0.9	46.8	
7803362	P4D4600FS40M13	46	284	184	40	70	0.8	47.6	
7803363	P4D4700FS40M13	47	288	188	40	70	0.7	48.4	
7803364	P4D4800FS40M13	48	292	192	40	70	0.5	49.0	
7803365	P4D4900FS40M13	49	296	196	40	70	0.3	49.6	
7803366	P4D5000FS40M14	50	300	200	40	70	1.1	52.2	
7803367	P4D5100FS40M14	51	304	204	40	70	1.0	53.0	
7803368	P4D5200FS40M14	52	308	208	40	70	0.8	53.6	
7803369	P4D5300FS40M14	53	312	212	40	70	0.7	54.4	
7803370	P4D5400FS40M14	54	316	216	40	70	0.6	55.2	
7803371	P4D5500FS40M14	55	320	220	40	70	0.4	55.8	
7803372	P4D5600FS40M14	56	324	224	40	70	0.1	56.2	
7803373	P4D5700FS40M16	57	328	228	40	70	1.1	59.2	
7803374	P4D5800FS40M16	58	332	232	40	70	1.0	60.0	
7803375	P4D5900FS40M16	59	336	236	40	70	0.9	60.8	
7803376	P4D6000FS40M16	60	340	240	40	70	0.8	61.6	
7803377	P4D6100FS40M16	61	344	244	40	70	0.6	62.2	
7803378	P4D6200FS40M16	62	348	248	40	70	0.4	62.8	
7803379	P4D6300FS40M16	63	352	252	40	70	0.2	63.4	

库存种类都为○(即标准库存品) Stock are categorized as ○ (Standard stock item).

# Phoenix


可转位式钻头  
Indexable Drill

## P5D




## Specification

■形状尺寸表 Specification

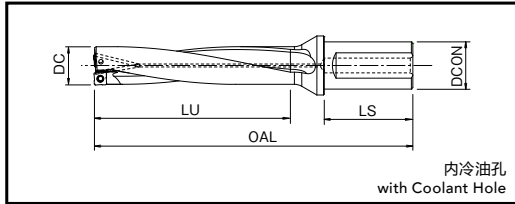

■加工径最大调整量 Max Offset Amount of Effective Dia.



单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	全长 OAL	有效加工深度 LU	柄径 DCON	柄长 LS	最大偏移量 ADJLX	最大加工径 DCX	适用刀片 Applicable Inserts
<b>NEW</b> 7802780	P5D1200FS20M03	12	123	60	20	50	0.4	12.8	①
<b>NEW</b> 7802781	P5D1250FS20M03	12.5	125.5	62.5	20	50	0.4	13.3	
<b>NEW</b> 7802782	P5D1300FS20M03	13	128	65	20	50	0.3	13.6	
<b>NEW</b> 7802783	P5D1350FS20M03	13.5	130.5	67.5	20	50	0.2	13.9	
<b>NEW</b> 7802784	P5D1400FS20M03	14	133	70	20	50	0.2	14.4	
<b>NEW</b> 7802785	P5D1450FS20M03	14.5	135.5	72.5	20	50	0.1	14.7	②
7802717	P5D1500FS20M04	15	140	75	20	50	0.4	15.8	
7802718	P5D1550FS20M04	15.5	143	78	20	50	0.3	16.1	
7802719	P5D1600FS20M04	16	145	80	20	50	0.3	16.6	
7802720	P5D1650FS20M04	16.5	148	83	20	50	0.3	17.1	
7802721	P5D1700FS20M05	17	153	85	20	50	0.6	18.2	③
7802722	P5D1750FS20M05	17.5	156	88	20	50	0.5	18.5	
7802790	P5D1750FS25M05		162		25	56			
7802723	P5D1800FS25M05	18	164	90	25	56	0.5	19.0	
7802724	P5D1850FS25M05	18.5	167	93	25	56	0.4	19.3	
7802725	P5D1900FS25M06	19	169	95	25	56	0.6	20.2	④
7802726	P5D1950FS25M06	19.5	172	98	25	56	0.5	20.5	
7802727	P5D2000FS25M06	20	174	100	25	56	0.4	20.8	
7802728	P5D2050FS25M06	20.5	177	103	25	56	0.4	21.3	
7802729	P5D2100FS25M07	21	184	105	25	56	0.6	22.2	
7802730	P5D2150FS25M07	21.5	187	108	25	56	0.6	22.7	⑤
7802731	P5D2200FS25M07	22	189	110	25	56	0.5	23.0	
7802732	P5D2250FS25M07	22.5	192	113	25	56	0.5	23.5	
7802733	P5D2300FS25M07	23	194	115	25	56	0.4	23.8	
7802791	P5D2350FS25M07	23.5	197	118	25	56	0.3	24.1	
7802734	P5D2350FS32M07		201		32	60			
7802792	P5D2400FS25M07	24	199	120	25	56	0.3	24.6	
7802735	P5D2400FS32M07		203		32	60			
7802793	P5D2450FS25M07	24.5	202	123	25	56	0.2	24.9	
7802736	P5D2450FS32M07		206		32	60			

FROM

单位:mm Unit:mm



商品号 EDP No.	名称 Designation	外径 DC	全长 OAL	有效加工深度 LU	柄径 DCON	柄长 LS	最大偏移量 ADJLX	最大加工径 DCX	适用刀片 Applicable Inserts
7802794	P5D2500FS25M08	25	204	125	25	56	0.7	26.4	⑥
7802737	P5D2500FS32M08		208		32	60			
7802795	P5D2550FS25M08	25.5	207	128	25	56	0.6	26.7	
7802738	P5D2550FS32M08		211		32	60			
7802739	P5D2600FS32M08	26	213	130	32	60	0.5	27.0	
7802740	P5D2650FS32M08	26.5	216	133	32	60	0.5	27.5	
7802741	P5D2700FS32M08	27	218	135	32	60	0.4	27.8	
7802742	P5D2800FS32M08	28	223	140	32	60	0.3	28.6	
7802743	P5D2850FS32M08	28.5	226	143	32	60	0.2	28.9	
7802744	P5D2900FS32M09	29	228	145	32	60	0.8	30.6	
7802745	P5D3000FS32M09	30	233	150	32	60	0.7	31.4	
7802746	P5D3100FS32M09	31	238	155	32	60	0.6	32.2	⑦
7802796	P5D3100FS40M09		248		40	70			
7802747	P5D3200FS32M09	32	243	160	32	60	0.5	33.0	
7802797	P5D3200FS40M09		253		40	70			
7802748	P5D3300FS40M09	33	258	165	40	70	0.4	33.8	
7802749	P5D3350FS40M09	33.5	261	168	40	70	0.2	33.9	
7802750	P5D3400FS40M10	34	263	170	40	70	1.1	36.2	
7802751	P5D3500FS40M10	35	268	175	40	70	0.8	36.6	
7802752	P5D3600FS40M10	36	273	180	40	70	0.8	37.6	
7802753	P5D3700FS40M10	37	278	185	40	70	0.6	38.2	
7802754	P5D3800FS40M10	38	283	190	40	70	0.3	38.6	
7802755	P5D3900FS40M12	39	295	195	40	70	1.0	41.0	
7802756	P5D4000FS40M12	40	300	200	40	70	0.9	41.8	
7802757	P5D4100FS40M12	41	305	205	40	70	0.8	42.6	
7802758	P5D4200FS40M12	42	310	210	40	70	0.6	43.2	
7802759	P5D4300FS40M12	43	315	215	40	70	0.5	44.0	
7802760	P5D4400FS40M12	44	320	220	40	70	0.3	44.6	
7802761	P5D4500FS40M13	45	325	225	40	70	0.9	46.8	
7802762	P5D4600FS40M13	46	330	230	40	70	0.8	47.6	
7802763	P5D4700FS40M13	47	335	235	40	70	0.7	48.4	
7802764	P5D4800FS40M13	48	340	240	40	70	0.5	49.0	
7802765	P5D4900FS40M13	49	345	245	40	70	0.3	49.6	
7802766	P5D5000FS40M14	50	350	250	40	70	1.1	52.2	
7802767	P5D5100FS40M14	51	355	255	40	70	1.0	53.0	
7802768	P5D5200FS40M14	52	360	260	40	70	0.8	53.6	
7802769	P5D5300FS40M14	53	365	265	40	70	0.7	54.4	
7802770	P5D5400FS40M14	54	370	270	40	70	0.6	55.2	
7802771	P5D5500FS40M14	55	375	275	40	70	0.4	55.8	
7802772	P5D5600FS40M14	56	380	280	40	70	0.1	56.2	
7802773	P5D5700FS40M16	57	385	285	40	70	1.1	59.2	
7802774	P5D5800FS40M16	58	390	290	40	70	1.0	60.0	
7802775	P5D5900FS40M16	59	395	295	40	70	0.9	60.8	
7802776	P5D6000FS40M16	60	400	300	40	70	0.8	61.6	
7802777	P5D6100FS40M16	61	405	305	40	70	0.6	62.2	
7802778	P5D6200FS40M16	62	410	310	40	70	0.4	62.8	
7802779	P5D6300FS40M16	63	415	315	40	70	0.2	63.4	

库存种类都为○(即标准库存品) Stock are categorized as ○ (Standard stock item).

# Phoenix

可转位式钻头  
Indexable Drill




刀片  
Inserts

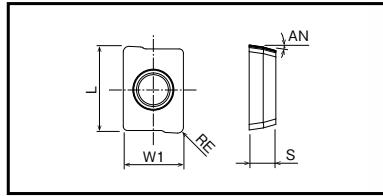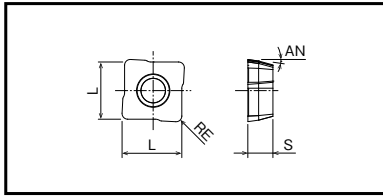

## Inserts

■适用刀片 Inserts

单位:mm Unit:mm

式样 Specification	名称 Designation	切削刃数 Number of Cutting Edges	适用刀体 Applicable Body	刀片尺寸 Insert Size				硬质合金 Uncoated			涂层种类 Grade of Coated Materials		
				L (xW1)	厚度 S	后角 AN	RE	Uncoated			Coated Materials		
								CK110	XP9020	XP1010	CK110	XP9020	XP1010
 钢 不锈钢 for Steel & Stainless Steel	<b>NEW</b> ① XCMT031904ER-DM	2	φ12~14.5	6.1x4.5	1.9	8°	0.4				7823098		
	② XCMT042204ER-DM	4	φ15~16.5	5.0	2.2	8°	0.4				7823064		
	③ XCMT052404ER-DM	4	φ17~18.5	5.83	2.4	8°	0.4				7823065		
	④ XCMT062706ER-DM	4	φ19~20.5	6.46	2.7	8°	0.6				7823066		
	⑤ XCMT073106ER-DM	4	φ21~24.5	7.11	3.1	8°	0.6				7823067		
	⑥ XCMT083508ER-DM	4	φ25~28.5	8.36	3.5	8°	0.8				7823068		
	⑦ XCMT094008ER-DM	4	φ29~33.5	9.62	4.0	8°	0.8				7823069		
	⑧ XCMT104608ER-DM	4	φ34~38	10.89	4.6	8°	0.8				7823097		
	⑨ XCMT125010ER-DM	4	φ39~44	12.57	5.0	8°	1.0				7823071		
	⑩ XCMT135212ER-DM	4	φ45~49	14.05	5.2	8°	1.2				7823072		
	⑪ XCMT145612ER-DM	4	φ50~56	15.58	5.6	8°	1.2				7823073		
	⑫ XCMT165912ER-DM	4	φ57~63	17.28	5.9	8°	1.2				7823075		
 铸铁 for Cast Iron	<b>NEW</b> ① XCMT031904ER-DR	2	φ12~14.5	6.1x4.5	1.9	8°	0.4						7823163
	② XCMT042204ER-DR	4	φ15~16.5	5.0	2.2	8°	0.4						7823164
	③ XCMT052404ER-DR	4	φ17~18.5	5.83	2.4	8°	0.4						7823165
	④ XCMT062706ER-DR	4	φ19~20.5	6.46	2.7	8°	0.6						7823166
	⑤ XCMT073106ER-DR	4	φ21~24.5	7.11	3.1	8°	0.6						7823167
	⑥ XCMT083508ER-DR	4	φ25~28.5	8.36	3.5	8°	0.8						7823168
	⑦ XCMT094008ER-DR	4	φ29~33.5	9.62	4.0	8°	0.8						7823169
	⑧ XCMT104608ER-DR	4	φ34~38	10.89	4.6	8°	0.8						7823197
	⑨ XCMT125010ER-DR	4	φ39~44	12.57	5.0	8°	1.0						7823171
	⑩ XCMT135212ER-DR	4	φ45~49	14.05	5.2	8°	1.2						7823172
	⑪ XCMT145612ER-DR	4	φ50~56	15.58	5.6	8°	1.2						7823173
	⑫ XCMT165912ER-DR	4	φ57~63	17.28	5.9	8°	1.2						7823175
 铝 非铁合金 for Aluminum(alloy) and Non-ferrous Metal	<b>NEW</b> ① XCMT031904ER-DN	2	φ12~14.5	6.1x4.5	1.9	8°	0.4	7823263					
	② XCMT042204ER-DN	4	φ15~16.5	5.0	2.2	8°	0.4	7823264					
	③ XCMT052404ER-DN	4	φ17~18.5	5.83	2.4	8°	0.4	7823265					
	④ XCMT062706ER-DN	4	φ19~20.5	6.46	2.7	8°	0.6	7823266					
	⑤ XCMT073106ER-DN	4	φ21~24.5	7.11	3.1	8°	0.6	7823267					
	⑥ XCMT083508ER-DN	4	φ25~28.5	8.36	3.5	8°	0.8	7823268					
	⑦ XCMT094008ER-DN	4	φ29~33.5	9.62	4.0	8°	0.8	7823269					
	⑧ XCMT104608ER-DN	4	φ34~38	10.89	4.6	8°	0.8	7823297					
	⑨ XCMT125010ER-DN	4	φ39~44	12.57	5.0	8°	1.0	7823271					
	⑩ XCMT135212ER-DN	4	φ45~49	14.05	5.2	8°	1.2	7823272					
	⑪ XCMT145612ER-DN	4	φ50~56	15.58	5.6	8°	1.2	7823273					
	⑫ XCMT165912ER-DN	4	φ57~63	17.28	5.9	8°	1.2	7823275					

外壳贴有专用标签  
Indicating label



### ■ P2D/P3D/P4D/P5D 外周刃专用刀片 Inserts for Peripheral Cutting Edge


NEW


单位:mm Unit:mm

式样 Specification	名称 Designation	切削刃数 Number of Cutting Edges	适用刀体 Applicable Body	刀片尺寸 Insert Size				涂层种类 Grade of Coated Materials
				L (xW1)	厚度 S	后角 AN	RE	
								XC9015
	① XCMT031904ER-DM	2	φ12~14.5	6.1x4.5	1.9	8°	0.4	7829098
	② XCMT042204ER-DM	4	φ15~16.5	5.0	2.2	8°	0.4	7829064
	③ XCMT052404ER-DM	4	φ17~18.5	5.83	2.4	8°	0.4	7829065
	④ XCMT062706ER-DM	4	φ19~20.5	6.46	2.7	8°	0.6	7829066
	⑤ XCMT073106ER-DM	4	φ21~24.5	7.11	3.1	8°	0.6	7829067
	⑥ XCMT083508ER-DM	4	φ25~28.5	8.36	3.5	8°	0.8	7829068
	⑦ XCMT094008ER-DM	4	φ29~33.5	9.62	4.0	8°	0.8	7829069
	⑧ XCMT104608ER-DM	4	φ34~38	10.89	4.6	8°	0.8	7829097
	⑨ XCMT125010ER-DM	4	φ39~44	12.57	5.0	8°	1.0	7829071
	⑩ XCMT135212ER-DM	4	φ45~49	14.05	5.2	8°	1.2	7829072
	⑪ XCMT145612ER-DM	4	φ50~56	15.58	5.6	8°	1.2	7829073
	⑫ XCMT165912ER-DM	4	φ57~63	17.28	5.9	8°	1.2	7829075

## Accessories

### ■ 零件 Accessories

商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts						
		①	②	③	④	⑤	⑥	
 固定螺丝 Clamping Screw	7808096	FS18536P	①	XCMT0319...	-	-	-	-
	7808139	FS20543P	②	XCMT0422...	③	XCMT0524...	-	-
	7808138	FS22550P	④	XCMT0627...	-	-	-	-
	7808136	FS25560P	⑤	XCMT0731...	-	-	-	-
	7808135	FS30570P	⑥	XCMT0835...	⑦	XCMT0940...	-	-
	7808137	FS35586P	⑧	XCMT1046...	⑨	XCMT1250...	-	-
	7808114	FS45510P	⑩	XCMT1352...	⑪	XCMT1456...	⑫	XCMT1659...

商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts						
		①	②	③	④	⑤	⑥	
 扳手 Wrench	7808223	6IP-D (Torx 6IP)	①	XCMT0319...	②	XCMT0422...	③	XCMT0524...
	7808224	7IP-D (Torx 7IP)	④	XCMT0627...	-	-	-	-
	7808225	8IP-D (Torx 8IP)	⑤	XCMT0731...	-	-	-	-
	7808226	9IP-D (Torx 9IP)	⑥	XCMT0835...	⑦	XCMT0940...	-	-
	7808228	15IP-D (Torx 15IP)	⑧	XCMT1046...	⑨	XCMT1250...	-	-
	7808229	20IP-D (Torx 20IP)	⑩	XCMT1352...	⑪	XCMT1456...	⑫	XCMT1659...

扳手请另购。 The wrenches are sold separately from the cutters.

库存种类都为○(即标准库存品) Stock are categorized as ○ (Standard stock item).

## Cutting Conditions

■ 切削条件基准表 Cutting Conditions

	加工材料 Work Material	抗拉强度·硬度 Tensile Strength·Hardness	切削速度 Vc (m/min) Cutting Speed	进给量 f (mm/rev) Feed Rate							
				P2D·P3D							
				φ12~φ14.5	φ15~φ16.5	φ17~φ18.5	φ19~φ20.5	φ21~φ24.5	φ25~φ28.5	φ29~φ33.5	φ34~φ63
P	软钢、低碳素钢 Mild Steel, Carbon Steel (SS400, S10C)	~180HB	200 (150~250)	0.06 (0.04~0.08)	0.06 (0.04~0.1)	0.06 (0.04~0.1)	0.07 (0.04~0.1)	0.08 (0.04~0.12)	0.08 (0.04~0.12)	0.1 (0.05~0.15)	0.1 (0.05~0.18)
	碳素钢、合金钢 Carbon Steel, Alloy Steel (S50C, SCM440)	~280HB	150 (100~220)	0.08 (0.04~0.12)	0.08 (0.04~0.14)	0.09 (0.04~0.16)	0.1 (0.04~0.18)	0.14 (0.04~0.2)	0.18 (0.06~0.25)	0.2 (0.08~0.3)	0.2 (0.08~0.35)
	模具钢 Die Steel (SKD11, SKD61)	~280HB	120 (80~180)	0.06 (0.04~0.1)	0.06 (0.04~0.1)	0.07 (0.04~0.1)	0.08 (0.04~0.12)	0.12 (0.04~0.15)	0.14 (0.06~0.2)	0.18 (0.08~0.25)	0.18 (0.08~0.25)
M	不锈钢 Stainless Steel (SUS304, SUS420)	~250HB	130 (80~180)	0.07 (0.04~0.1)	0.07 (0.04~0.1)	0.08 (0.04~0.1)	0.09 (0.04~0.12)	0.1 (0.04~0.15)	0.13 (0.06~0.2)	0.15 (0.08~0.25)	0.15 (0.08~0.25)
K	铸铁 Cast Iron (FC250)	~350N/mm <sup>2</sup>	200 (150~280)	0.08 (0.04~0.14)	0.08 (0.04~0.14)	0.1 (0.04~0.16)	0.12 (0.04~0.2)	0.16 (0.08~0.25)	0.2 (0.06~0.3)	0.2 (0.08~0.3)	0.2 (0.08~0.35)
	球墨铸铁 Ductile Cast Iron (FCD400)	~800N/mm <sup>2</sup>	160 (100~220)	0.08 (0.04~0.1)	0.08 (0.04~0.12)	0.09 (0.04~0.14)	0.1 (0.04~0.18)	0.14 (0.04~0.2)	0.18 (0.06~0.25)	0.18 (0.08~0.25)	0.18 (0.08~0.25)
N	铝合金 Aluminum Alloy	~13%Si	200 (100~800)	0.08 (0.04~0.12)	0.08 (0.04~0.12)	0.1 (0.04~0.16)	0.12 (0.04~0.2)	0.16 (0.04~0.25)	0.2 (0.06~0.3)	0.2 (0.08~0.3)	0.2 (0.08~0.3)
S	超耐热合金 Superalloy (Inconel 718)	-	50 (15~60)	0.04 (0.02~0.06)	0.04 (0.02~0.06)	0.05 (0.03~0.06)	0.05 (0.03~0.06)	0.06 (0.04~0.08)	0.08 (0.06~0.1)	0.1 (0.06~0.12)	0.1 (0.06~0.12)
	钛合金 Titanium Alloy (Ti-6Al-4V)	-	60 (30~100)	0.05 (0.04~0.08)	0.05 (0.04~0.08)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.08 (0.04~0.15)	0.1 (0.06~0.2)	0.14 (0.08~0.2)	0.14 (0.08~0.2)
H	预硬钢 Pre-hardened Steel (NAK80)	40~43HRC	100 (60~120)	0.06 (0.04~0.1)	0.06 (0.04~0.1)	0.06 (0.04~0.12)	0.07 (0.04~0.12)	0.08 (0.04~0.12)	0.1 (0.06~0.15)	0.1 (0.06~0.15)	0.1 (0.06~0.15)
	调质钢 Hardened Steel (SKD11)	50~55HRC	60 (40~80)	0.05 (0.04~0.08)	0.05 (0.04~0.08)	0.05 (0.04~0.08)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.08 (0.04~0.1)	0.08 (0.04~0.1)	0.08 (0.04~0.1)

1. 这张切削条件基准表是以水溶性切削油剂作为内部供油。
2. 请使用稀释倍率20倍以下的优质水溶性切削油剂。
3. 不推荐使用不水溶性切削油剂。
4. 这张切削条件基准表的数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。
5. 请确保整洁干净后紧紧地安装刀片。
6. 请牢牢固定加工材料，确保在没有变形、弯曲、振动的情况下加工。
7. 油孔堵塞是造成折损问题的原因，请务必安装供油装置的过滤器。

## 加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材料 Best  
○第二推荐材料 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
XP9020	DM	有 Wet	◎	◎	○	○	○	○
XP1010	DR	有 Wet	○	◎				
CK110	DN	有 Wet				◎		

## 外周刃专用刀片

Inserts for Peripheral Cutting Edge

◎第一推荐材料 Best  
○第二推荐材料 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
XC9015	DM	有 Wet	◎		◎			


		进给量 f (mm/rev) Feed Rate															
		P4D								P5D							
		ø12-ø14.5	ø15-ø16.5	ø17-ø18.5	ø19-ø20.5	ø21-ø24.5	ø25-ø28.5	ø29-ø33.5	ø34-ø63	ø12-ø14.5	ø15-ø16.5	ø17-ø18.5	ø19-ø20.5	ø21-ø24.5	ø25-ø28.5	ø29-ø33.5	ø34-ø63
		0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.07 (0.04~0.1)	0.08 (0.04~0.12)	0.08 (0.04~0.12)	0.1 (0.05~0.15)	0.1 (0.05~0.18)	0.05 (0.04~0.08)	0.05 (0.04~0.08)	0.06 (0.04~0.08)	0.07 (0.04~0.1)	0.08 (0.04~0.12)	0.08 (0.04~0.12)	0.1 (0.05~0.15)	0.1 (0.05~0.18)
		0.07 (0.04~0.1)	0.08 (0.04~0.14)	0.08 (0.04~0.16)	0.09 (0.04~0.18)	0.12 (0.04~0.15)	0.18 (0.06~0.25)	0.2 (0.08~0.25)	0.2 (0.08~0.3)	0.06 (0.04~0.09)	0.06 (0.04~0.09)	0.08 (0.04~0.12)	0.08 (0.04~0.14)	0.12 (0.04~0.15)	0.15 (0.06~0.2)	0.18 (0.08~0.2)	0.18 (0.08~0.25)
		0.06 (0.04~0.08)	0.06 (0.04~0.1)	0.07 (0.04~0.1)	0.08 (0.04~0.12)	0.1 (0.04~0.13)	0.14 (0.06~0.2)	0.18 (0.08~0.25)	0.18 (0.08~0.25)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.07 (0.04~0.1)	0.1 (0.04~0.13)	0.12 (0.06~0.15)	0.15 (0.08~0.18)	0.16 (0.08~0.22)
		0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.07 (0.04~0.1)	0.08 (0.04~0.1)	0.08 (0.04~0.1)	0.13 (0.06~0.2)	0.15 (0.08~0.2)	0.15 (0.08~0.2)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.07 (0.04~0.09)	0.08 (0.04~0.1)	0.1 (0.06~0.15)	0.12 (0.06~0.18)	0.12 (0.06~0.2)
		0.08 (0.04~0.12)	0.08 (0.04~0.14)	0.09 (0.04~0.16)	0.1 (0.04~0.2)	0.12 (0.04~0.15)	0.2 (0.06~0.3)	0.2 (0.08~0.3)	0.2 (0.08~0.3)	0.06 (0.04~0.1)	0.06 (0.04~0.1)	0.08 (0.04~0.12)	0.08 (0.04~0.13)	0.12 (0.04~0.15)	0.15 (0.06~0.2)	0.18 (0.08~0.2)	0.18 (0.08~0.25)
		0.08 (0.04~0.1)	0.08 (0.04~0.1)	0.08 (0.04~0.12)	0.09 (0.04~0.15)	0.12 (0.04~0.15)	0.15 (0.06~0.25)	0.18 (0.08~0.25)	0.18 (0.08~0.25)	0.06 (0.04~0.09)	0.06 (0.04~0.09)	0.08 (0.04~0.12)	0.08 (0.04~0.12)	0.1 (0.04~0.13)	0.12 (0.06~0.15)	0.15 (0.08~0.18)	0.18 (0.08~0.25)
		0.07 (0.04~0.12)	0.07 (0.04~0.12)	0.09 (0.04~0.12)	0.12 (0.04~0.2)	0.14 (0.04~0.2)	0.2 (0.06~0.3)	0.2 (0.08~0.3)	0.2 (0.08~0.3)	0.06 (0.04~0.1)	0.06 (0.04~0.1)	0.09 (0.04~0.12)	0.1 (0.04~0.15)	0.12 (0.04~0.15)	0.15 (0.06~0.25)	0.2 (0.08~0.3)	0.2 (0.08~0.3)
		0.04 (0.02~0.06)	0.04 (0.02~0.06)	0.04 (0.02~0.06)	0.04 (0.02~0.06)	0.05 (0.04~0.08)	0.07 (0.06~0.1)	0.08 (0.06~0.12)	0.08 (0.06~0.12)	0.04 (0.02~0.06)	0.04 (0.02~0.06)	0.04 (0.02~0.06)	0.04 (0.02~0.06)	0.04 (0.02~0.06)	0.07 (0.06~0.08)	0.07 (0.06~0.08)	0.07 (0.06~0.08)
		0.05 (0.04~0.08)	0.05 (0.04~0.08)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.08 (0.04~0.1)	0.1 (0.06~0.2)	0.14 (0.08~0.2)	0.14 (0.08~0.2)	0.05 (0.04~0.08)	0.05 (0.04~0.08)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.06 (0.04~0.1)	0.08 (0.06~0.15)	0.1 (0.08~0.15)	0.1 (0.08~0.15)
		0.06 (0.04~0.1)	0.06 (0.04~0.1)	0.06 (0.04~0.1)	0.06 (0.04~0.1)	0.08 (0.04~0.12)	0.08 (0.06~0.12)	0.1 (0.06~0.13)	0.1 (0.06~0.13)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.08 (0.04~0.1)	0.08 (0.06~0.12)	0.1 (0.06~0.12)	0.1 (0.06~0.12)
		0.05 (0.04~0.08)	0.05 (0.04~0.08)	0.05 (0.04~0.08)	0.06 (0.04~0.08)	0.06 (0.04~0.08)	0.08 (0.04~0.1)	0.08 (0.04~0.1)	0.08 (0.04~0.1)	0.05 (0.04~0.07)	0.05 (0.04~0.07)	0.05 (0.04~0.07)	0.06 (0.04~0.07)	0.06 (0.04~0.08)	0.07 (0.04~0.1)	0.08 (0.04~0.1)	0.08 (0.04~0.1)

- The indicated speeds and feeds are for using water-soluble oil with inner supply.
- Suitable cutting fluid is water-soluble in high density (less than 20 times dilution).
- Using non-water-soluble oil is not recommended.
- The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.
- Inserts should be attached to the holder tightly in a very neat condition.
- Fasten the work material to reduce the possibility of work deformation, deflection of machined surface, or vibration.
- A clogged oil hole can lead to a breakage. Make sure that a filter is attached to the oil feeder.

# Pre-Drilled Hole Size for Tap

## PD 孔底高低差的参考值 Reference Value of PD Hmax

钻头径 Drill Dia	Hmax (mm)
φ 12~φ 14.5	0.6
φ 15~φ 16.5	0.8
φ 17~φ 18.5	0.9
φ 19~φ 20.5	1.1
φ 21~φ 24.5	1.2
φ 25~φ 28.5	1.5
φ 29~φ 33.5	1.6
φ 34~φ 38	1.7
φ 39~φ 44	2
φ 45~φ 49	2.3
φ 50~φ 56	2.5
φ 57~φ 63	2.6

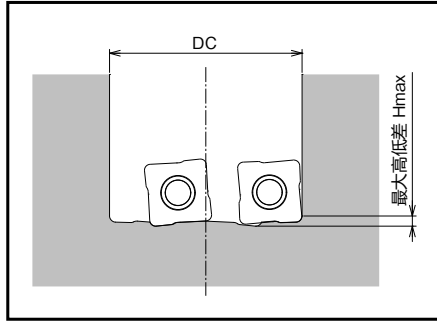

## 加工孔径参考值

Reference Value of Hole Diameter 单位:mm Unit:mm

外径 DC	P2D·P3D	P4D·P5D
φ 12~φ 20.5	+0.25 0	+0.3 0
φ 21~φ 49	+0.3 0	+0.4 0
φ 50~φ 63	+0.35 0	+0.5 0

上述为推荐条件下的标准值。视加工环境会有不同情况。  
The above values are general recommendation and may differ based on actual machining condition.

## 丝锥底孔径·推荐丝锥一览表 Recommended taps and size chart

### P2D/P3D用 for P2D/P3D

#### 切削丝锥用 for Cutting Tap

螺纹尺寸 Thread Size	推荐底孔径 Recommended drill hole diameter	最小底孔径 Min. drill hole dia.		最大底孔径 Max. drill hole dia.		适用刀体 Applicable Body		推荐丝锥 商品号 Recommended Tap No.	
		各精度共通	旧 JIS 2級用	6H用	P2D	P3D	A-SFT	A-POT	
M 14 × 2	12	11.84	12.21	12.21	P2D1200FS20M03	P3D1200FS20M03	8325347	-	
M 14 × 1.5	12.5	12.38	12.67	12.67	P2D1250FS20M03	P3D1250FS20M03	8325350	-	
M 16 × 2	14	13.9	14.2	14.21	P2D1400FS20M03	P3D1400FS20M03	8325357	8325157	
M 16 × 1.5	14.5	14.4	14.6	14.67	P2D1450FS20M03	P3D1450FS20M03	8325360	8325160	
M 17 × 1.5	15.5	15.4	15.68	15.67	P2D1550FS20M04	P3D1550FS20M04	8325364	8325164	
M 18 × 2.5	15.5	15.3	15.7	15.74			8325367	3825167	
M 18 × 2	16	15.9	16.2	16.21	P2D1600FS20M04	P3D1600FS20M04	8325369	8325169	
M 18 × 1.5	16.5	16.4	16.6	16.67	P2D1650FS20M04	P3D1650FS20M04	8325370	8325170	
M 20 × 2.5	17.5	17.3	17.7	17.74	P2D1750FS20M05	P3D1750FS20M05	8325377	8325177	
					P2D1750FS25M05	P3D1750FS25M05			
M 20 × 2	18	17.9	18.2	18.21	P2D1800FS25M05	P3D1800FS25M05	8325379	8325179	
M 20 × 1.5	18.5	18.4	18.6	18.67	P2D1850FS25M05	P3D1850FS25M05	8325380	8325180	
M 22 × 2.5	19.5	19.3	19.7	19.74	P2D1950FS25M06	P3D1950FS25M06	8325387	8325187	
M 22 × 2	20	19.9	20.2	20.21	P2D2000FS25M06	P3D2000FS25M06	8325389	8325189	
M 22 × 1.5	20.5	20.4	20.6	20.67	P2D2050FS20M06	P3D2050FS20M06	8325390	8325190	
M 24 × 3	21	20.8	21.2	21.25	P2D2100FS25M07	P3D2100FS25M07	8325397	8325197	
M 24 × 2	22	21.9	22.2	22.21	P2D2200FS25M07	P3D2200FS25M07	8325399	8325199	
M 24 × 1.5	22.5	22.4	22.6	22.67	P2D2250FS25M07	P3D2250FS25M07	8325400	8325200	
M 27 × 3	24	23.8	24.2	24.25	P2D2400FS25M07	P3D2400FS25M07	8326605		
					P2D2400FS32M07	P3D2400FS32M07			
					P2D2550FS25M08	P3D2550FS25M08			
M 27 × 1.5	25.5	25.4	25.6	25.67	P2D2550FS32M08	P3D2550FS32M08	8326608		
					P2D2650FS32M08	P3D2650FS32M08			
M 30 × 3.5	26.5	26.3	26.7	26.77	P2D2700FS32M08	P3D2700FS32M08	8326615		
M 30 × 3	27	26.8	27.2	27.25	P2D2850FS32M08	P3D2850FS32M08	8326618		
M 30 × 1.5	28.5	28.4	28.6	28.67	-	P3D2950FS32M09	8326624		
M 33 × 3.5	29.5	29.3	29.7	29.77	-	P3D3000FS32M09	8326625		
M 33 × 3	30	29.8	30.2	30.25	P2D3000FS32M09	P3D3000FS32M09	8326628		
M 33 × 1.5	31.5	31.4	31.6	31.67	-	P3D3150FS32M09	8326628		
M 36 × 4	32	31.7	32.2	32.27	P2D3200FS32M09	P3D3200FS32M09	8326633	-	
					P2D3200FS40M09	P3D3200FS40M09			
M 36 × 3	33	32.8	33.2	33.25	P2D3300FS40M09	P3D3300FS40M09	8326635		
M 36 × 1.5	34.5	34.4	34.6	34.67	-	P3D3450FS40M10	8326638		
M 39 × 4	35	34.7	35.2	35.27	P2D3500FS40M10	P3D3500FS40M10	8326643		
M 42 × 4.5	37.5	37.2	37.7	37.79	-	P3D3750FS40M10	8326652		
M 42 × 3	39	38.8	39.2	39.25	P2D3900FS40M12	P3D3900FS40M12	8326655		
M 42 × 1.5	40.5	40.4	40.6	40.67	-	P3D4050FS40M12	8326658		
M 45 × 4.5	40.5	40.2	40.7	40.79	-		8326659		
M 48 × 5	43	42.6	43.2	43.29	P2D4300FS40M12	P3D4300FS40M12	8326661		
M 48 × 3	45	44.8	45.2	45.25	P2D4500FS40M13	P3D4500FS40M13	8326665		
M 56 × 5.5	50.5	50.1	50.7	50.7	-	P3D5050FS40M14	8326670		

※关于铣刀柄、长柄型的商品号, 请参阅「高效率·多功能丝锥 A-TAP」样本。

For additional sizes and styles, please refer to the high efficiency, multi-purpose A-Tap series catalog.

# Performance Evaluation & Cutting Data

性能评价及加工数据 Performance Evaluation & Cutting Data

## 即使是苛刻的5D 深孔也能稳定加工

Achieves stable drilling, even when making rigorous, 5xD deep holes

加工材料 : S50C

Work Material

使用机械 : 卧式加工中心

Machine Horizontal Machining Center

刀具径 :  $\phi 25$

Drill Diameter

切削油剂 : 水溶性切削油剂

Coolant Water-Soluble



切深量 : 125mm

Depth of Hole

切削条件 :  $V_c=150\text{m/min}$ ,  $f=0.12\text{mm/rev}$

Cutting Conditions


### 以往产品 Conventional Indexable Drill

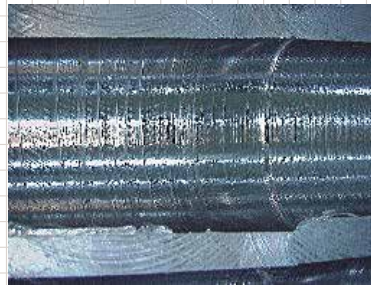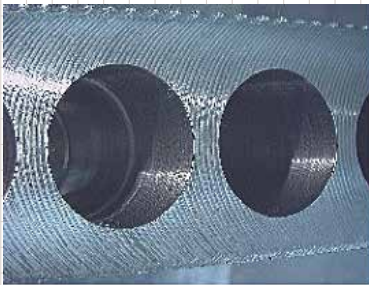

横截面照片 Cross-sectional

- 以往的可转位式钻头加工5D 深孔非常困难。
- 可转位式钻头是双槽单刃，径向负荷平衡较差，容易导致径向负荷过大。对于深孔加工影响更大。
- 5xD deep hole drilling was an extremely difficult process for conventional indexable drills.
- Since conventional indexable drills are constructed of two flutes and a cutting edge, its load balance is relatively poor especially when drilling deep holes.

### P5D

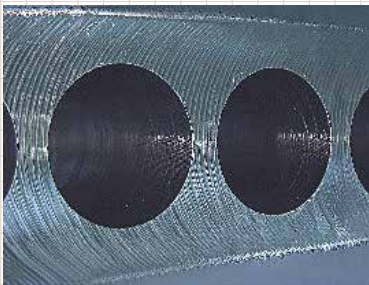

- 可实现面精度优良的稳定加工!
- 以5D 深孔加工为基准的专用设计，可实现稳定加工。
- Achieves stable drilling with minimal irregularity!
- The P5D is designed specifically for stable drilling of 5xD deep holes.

## 稳定的切削负荷 Stable cutting load

加工材料 : S50C

Work Material

使用机械 : 卧式加工中心 (BT50)

Machine Horizontal Machining Center

刀具径 :  $\phi 21$

Drill Diameter

切削油剂 : 水溶性切削油剂


Coolant Water-Soluble

切深量 : 50mm

Depth of Hole

切削条件 :  $V_c=120\text{m/min}$ ,  $f=0.12\text{mm/rev}$

Cutting Conditions

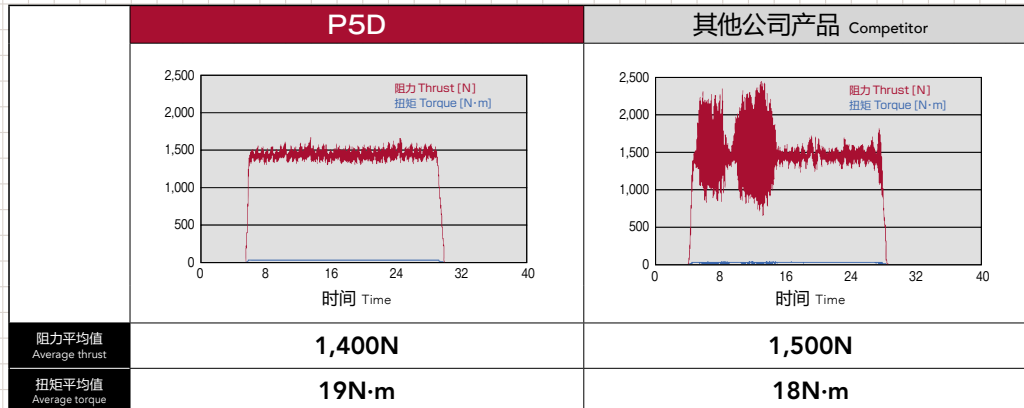

# Performance Evaluation & Cutting Data



■ 性能评价及加工数据 Performance Evaluation & Cutting Data


## 金属模具零件的高效率钻孔加工(P3D) High efficiency drilling in mold parts (P3D)

使用工具 Tool	P3D2500FS32M08 (φ25)	其他公司可转位式钻头 (φ25) Competitor's Indexable Drill
使用刀片(材质) Insert (grade)	XCMT083508ER-DM (XP9020)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	S50C	
切削速度 Cutting Speed	200m/min (2,550min <sup>-1</sup> )	167m/min (2,100min <sup>-1</sup> )
进给速度 Feed	300mm/min (0.12mm/rev)	170mm/min (0.08mm/rev)
切深量 Depth of Hole	50mm (通孔) (Through)	
切削油剂 Coolant	水溶性切削油剂(内部给油) Water-Soluble (Internal)	
使用机械 Machine	立式加工中心 (BT40) Vertical Machining Center	

其他公司产品如果加大加工条件的话, 会切屑堵塞导致加工困难。P3D 即使加大加工条件, 也能通过细小分断切屑拥有良好的排屑性, 大幅缩短加工时间。

The competitor product exhibited difficulties in the separation of cutting chips, whereas the P3D was able to break chips into small pieces for trouble-free evacuation, reducing processing time significantly.

	加工时间 (秒/孔) Cutting Time (sec./hole)			
	5	10	15	20
P3D				
其他公司产品 Competitor				





P3D的切屑 Cutting Chips of P3D


## 结构物的高效率钻孔加工(P4D) High efficiency drilling of structural part (P4D)

使用工具 Tool	P4D3300FS40M09 (φ33)	其他公司可转位式钻头 (φ33) Competitor's Indexable Drill
使用刀片(材质) Insert (grade)	XCMT094008ER-DM (XP9020)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SS400	
切削速度 Cutting Speed	220m/min (2,100min <sup>-1</sup> )	165m/min (1,600min <sup>-1</sup> )
进给速度 Feed	150mm/min (0.07mm/rev)	110mm/min (0.07mm/rev)
切深量 Depth of Hole	100mm (盲孔) (Blind)	
切削油剂 Coolant	水溶性切削油剂(内部给油) Water-Soluble (Internal)	
使用机械 Machine	卧式加工中心 (BT50) Horizontal Machining Center	

以往, 加工深度超过70mm 的话, 由于切屑堵塞只能进行2mm 的阶梯式加工。使用即使深孔加工也能有优异排屑性的P4D的话, 无需阶梯式加工, 而且可以加大加工条件, 单孔加工时间缩短45%。

To prevent chip clogging, 2mm step-drilling was commonly required for applications with a depth of over 70mm. The P4D, however, was able to demonstrate excellent chip evacuation even in deep-hole with no step processing required, improving performance with the reduction of machining time by 45% per hole.

	加工时间 (秒/孔) Cutting Time (sec./hole)			
	20	40	60	80
P4D				
其他公司产品 Competitor				




### 即使 SUS304 也能稳定加工 (P5D) Stable performance even in SUS304 (P5D)

使用工具 Tool	P5D1500FS20M04 (φ15)	其他公司产品 A Competitor	其他公司产品 B Competitor
使用刀片(材质) Insert (grade)	XCMT042204ER-DM (XP9020)	硬质合金涂层刀片 Coated Carbide Insert	
加工材料 Work Material	SUS304		
切削速度 Cutting Speed	120m/min (2,550min <sup>-1</sup> )		
进给速度 Feed	150mm/min (0.06mm/rev)		
切深量 Depth of Hole	75mm(盲孔) (Blind)		
切削油剂 Coolant	水溶性切削油剂(内部给油) Water-Soluble (Internal)		
使用机械 Machine	卧式加工中心(BT40) Horizontal Machining Center		

#### SUS304加工实现长寿命。

The P5D was able to achieve long tool life by drilling SUS304.



	切削孔数 Number of Holes	50	100	150
P5D				
其他公司 产品 A Competitor				
其他公司 产品 B Competitor				

#### 加工9m 时的磨损比较 Wear comparison after 9m of drilling




### FC250 的长寿命加工 (P5D) Drilling with long tool life in FC250 (P5D)

使用工具 Tool	P5D2500FS32M08 (φ25)	其他公司可转位式钻头 (φ25) Competitor's Indexable Drill
使用刀片(材质) Insert (grade)	XCMT083508ER-DR (XP1010)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	FC250	
切削速度 Cutting Speed	150m/min (1,910min <sup>-1</sup> )	
进给速度 Feed	200mm/min (0.1mm/rev)	
切深量 Depth of Hole	100mm(盲孔) (Blind)	
切削油剂 Coolant	水溶性切削油剂(内部给油) Water-Soluble (Internal)	
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center	

#### 是其他公司产品寿命的 1.3 倍, 250 孔也能稳定的加工。

P5D achieved stable drilling of 250 holes, which was over 1.3 times, versus the competition.



	切削孔数 Number of Holes	50	100	150	200	250
P5D						
他社品 Competitor						

#### 加工150孔时的磨损比较 Wear comparison after 150 holes of drilling



# Cutting Data

加工数据 Cutting Data

## ADC12的长寿命加工 (P5D) Drilling with long tool life in ADC12 (P5D)


使用工具 Tool	P5D2500FS32M08 (φ25)	其他公司可转位式钻头 (φ25) Competitor's Indexable Drill
使用刀片(材质) Insert (grade)	XCMT083508ER-DN (CK110)	硬质合金涂层刀片 Carbide Insert
加工材料 Work Material	ADC12	
切削速度 Cutting Speed	250m/min (3,185min <sup>-1</sup> )	
进给速度 Feed	320mm/min (0.1mm/rev)	
切深量 Depth of Hole	100mm(盲孔) (Blind)	
切削油剂 Coolant	水溶性切削油剂(内部给油) Water-Soluble (Internal)	
使用机械 Machine	卧式加工中心 (BT50) Horizontal Machining Center	

### 加工200孔时的磨损比较 Wear comparison after 200 holes of drilling




使用铝合金·非铁用刀片加工 ADC12 时实现长寿命。

Long tool life was achieved in machining ADC12 by using inserts for aluminum alloy and non-ferrous materials.




## 高硬度材的长寿命加工 (P3D) Drilling with long tool life in high-hardened material (P3D)

使用工具 Tool	P3D2100FS25M07 (φ21)	其他公司可转位式钻头 (φ21) Competitor's Indexable Drill
使用刀片(材质) Insert (grade)	XCMT073106ER-DM (XP9020)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SKD61 (50HRC)	
切削速度 Cutting Speed	80m/min (1,200min <sup>-1</sup> )	
进给速度 Feed	100mm/min (0.08mm/rev)	
切深量 Depth of Hole	63mm(盲孔) (Blind)	
切削油剂 Coolant	水溶性切削油剂(内部给油) Water-Soluble (Internal)	
使用机械 Machine	卧式加工中心 (BT40) Horizontal Machining Center	

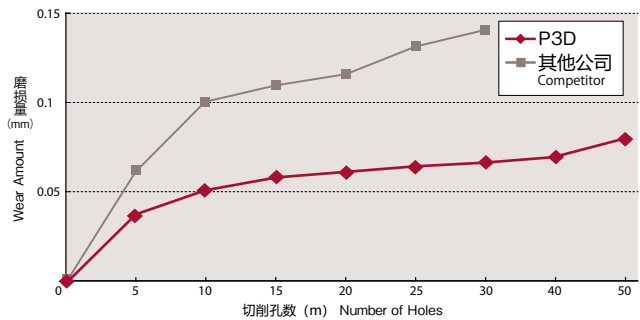

加工 HRC50 的高硬度材料时, 其他公司产品加工 30 孔就会中心刃崩刃, P3D 的话加工 50 孔后只有轻微磨损, 可以继续加工。

The competitor product exhibited chipping of the center blade after processing 30 holes in a high hardness material of HRC50. The P3D, on the other hand, was able to continue processing even after 50 holes with minimal wear.



### 磨损比较 Wear comparison



## 工程机件的车削孔加工 (P4D) Turning of building component (P4D)


使用工具 Tool	P4D2200FS25M07 (φ22)	其他公司可转位式钻头 (φ22) Competitor's Indexable Drill
使用刀片(材质) Insert (grade)	XCMT073106ER-DM (XP9020)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SCM415	
切削速度 Cutting Speed	104m/min (1,500min <sup>-1</sup> )	
进给速度 Feed	300mm/min (0.2mm/rev)	
切深量 Depth of Hole	70mm(通孔) (Through)	
切削油剂 Coolant	水溶性切削油剂(内部给油) Water-Soluble (Internal)	
使用机械 Machine	卧式 NC 车床 Horizontal NC Lathe	

### 加工150孔后的磨损情况 Wear comparison after 150 holes of drilling



孔深 70mm 的车削孔加工时, 相对于其他公司产品刀片崩刃来说, P4D 能稳定加工深孔, 不崩刃, 只产生轻微磨损, 可以继续使用。

The insert of the competitor tool exhibited chipping during the processing of a 70mm deep-hole turning application while the P4D was able to continue processing with minimal wear shown.



■可定制带倒角等结合加工环境的非标品。详情请咨询本公司销售。

Custom tooling with specifications such as chamfering are available upon request. Please contact your local sales representative for details.




带倒角PD 钻头(非标品)  
PD with Chamfering (Special)



带沉孔PD 钻头(非标品)  
PD with Counterbore (Special)



大径( $D_c > \phi 63$ ) PD 钻头(非标品)  
PD for large diameter ( $DC > \phi 63$ , Special)

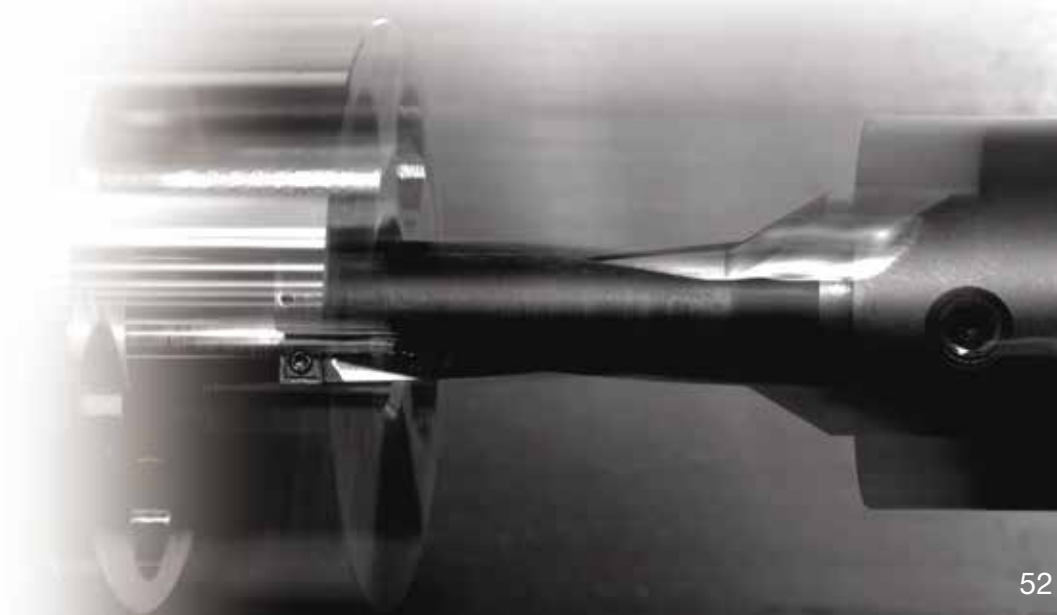

# » Phoenix PHP

可转位式钻头 3D用  
Indexable Drill for 3D

Phoenix High Performance drill



## ■ OSG 专利的形状可对应各式加工形态

Unique design supports many types of machining

### ■ 刀片的排列 Insert arrangement

- 可减少吃入抵抗的先端角形状  
Point angle shape reduces bite resistance
- 可实现高效率加工的平衡排列  
Balanced arrangement to achieve high efficiency machining
- 中心、外周刃上可以使用相同刀片，易于管理  
The center and the peripheral edge of the same insert can be used, simplifying insert management.




### ■ 最适合槽形 Ideal flute form

控制切屑的排出方向 Controls the flow of chips

### ■ 先端角形状可对应困难的加工形状

Shaped corner tips for difficult drilling shapes

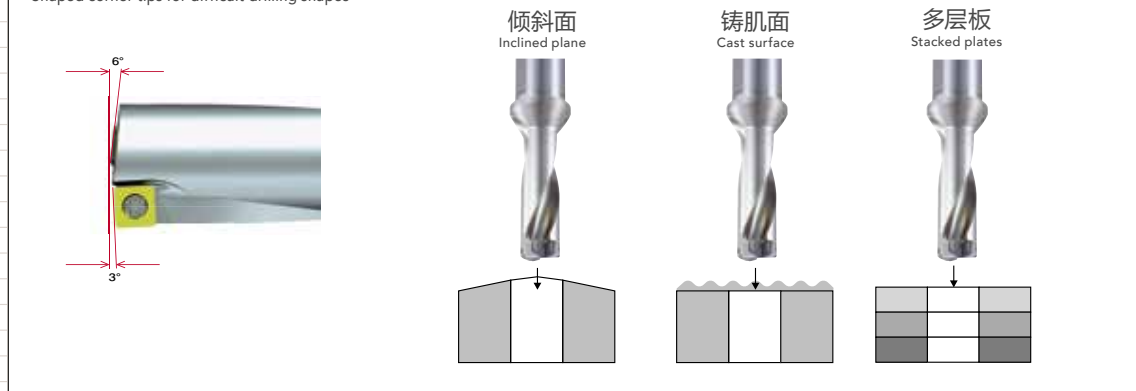


### ■ 高刚性刀体 High rigidity of body

提高刀具寿命 High rigidity improves tool durability


## ■ 稳定的扭矩 The stable torque

使用工具 Tool	PHP210FS25M07-3D (φ21)
使用刀片(材质) Insert(grade)	SCMT073206-DM(XP9040)
加工材料 Work Material	S50C
切削速度 Cutting Speed	150m/min (2,275min <sup>-1</sup> )
进给速度 Feed	341mm/min (0.15mm/rev)
切深量 Depth of Hole	50mm
切削油剂 Coolant	水溶性切削油剂 (内部给油) Water-Soluble (Internal)
使用机械 Machine	立式加工中心 (BT50) (26kW/30kW) Vertical Machining Center

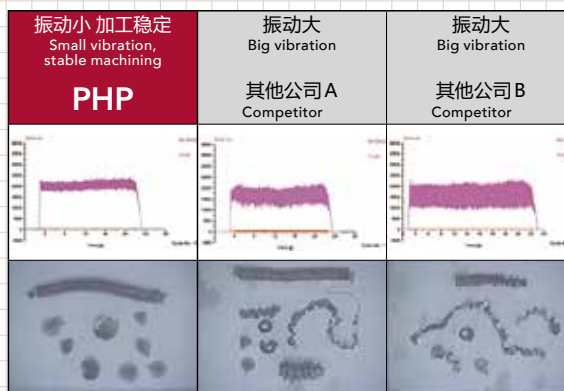


稳定的扭矩，减少对机械的负荷。

Stable torque minimizes the load imparted on the machine.



# Specification

■形状尺寸表 Specification

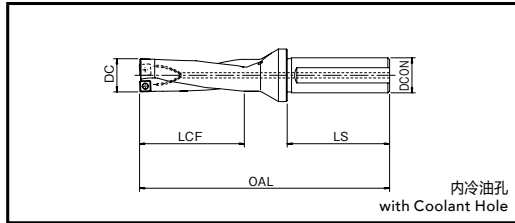

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	全长 OAL	槽长 LCF	柄径 DCON	柄长 LS	适用刀片 Applicable Inserts
7800100	PHP140FS20M04-3D	14	116	42	20	50	①
7800101	PHP145FS20M04-3D	14.5	119	45	20	50	
7800102	PHP150FS20M04-3D	15	119	45	20	50	
7800103	PHP155FS20M04-3D	15.5	122	48	20	50	
7800104	PHP160FS20M04-3D	16	122	48	20	50	②
7800105	PHP165FS20M05-3D	16.5	125	51	20	50	
7800106	PHP170FS20M05-3D	17	125	51	20	50	
7800107	PHP175FS25M05-3D	17.5	134	54	25	56	
7800108	PHP180FS25M05-3D	18	134	54	25	56	③
7800109	PHP185FS25M06-3D	18.5	137	57	25	56	
7800110	PHP190FS25M06-3D	19	137	57	25	56	
7800111	PHP195FS25M06-3D	19.5	140	60	25	56	
7800112	PHP200FS25M06-3D	20	140	60	25	56	④
7800113	PHP205FS25M06-3D	20.5	143	63	25	56	
7800114	PHP210FS25M07-3D	21	143	63	25	56	
7800115	PHP215FS25M07-3D	21.5	146	66	25	56	
7800116	PHP220FS25M07-3D	22	146	66	25	56	⑤
7800117	PHP225FS25M07-3D	22.5	149	69	25	56	
7800118	PHP230FS25M07-3D	23	149	69	25	56	
7800119	PHP235FS32M07-3D	23.5	156	72	32	60	
7800120	PHP240FS32M07-3D	24	156	72	32	60	⑥
7800121	PHP245FS32M08-3D	24.5	159	75	32	60	
7800122	PHP250FS32M08-3D	25	159	75	32	60	
7800123	PHP255FS32M08-3D	25.5	162	78	32	60	
7800124	PHP260FS32M08-3D	26	162	78	32	60	⑦
7800125	PHP265FS32M08-3D	26.5	165	81	32	60	
7800126	PHP270FS32M08-3D	27	165	81	32	60	
7800127	PHP280FS32M08-3D	28	168	84	32	60	
7800128	PHP290FS32M10-3D	29	171	87	32	60	⑧
7800130	PHP300FS32M10-3D	30	179	90	32	60	
7800131	PHP310FS32M10-3D	31	182	93	32	60	
7800132	PHP320FS32M10-3D	32	185	96	32	60	
7800133	PHP330FS40M10-3D	33	196	99	40	68	⑨
7800134	PHP340FS40M10-3D	34	199	102	40	68	
7800135	PHP350FS40M12-3D	35	202	105	40	68	
7800136	PHP360FS40M12-3D	36	205	108	40	68	
7800137	PHP370FS40M12-3D	37	218	111	40	68	
7800138	PHP380FS40M12-3D	38	221	114	40	68	
7800139	PHP390FS40M12-3D	39	224	117	40	68	
7800140	PHP400FS40M12-3D	40	227	120	40	68	

蓝字 = 切削丝锥底孔 Blue = tap drill hole for cutting taps  
 对应螺纹尺寸推荐底孔直径请参照p.16.  
 Please see p.16 for recommended tap pilot hole size.


# Phoenix

可转位式钻头 3D用

Indexable Drill for 3D

## PHP刀片

Inserts

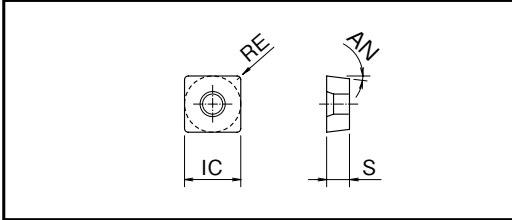

## Inserts


### ■适用刀片 Inserts

单位:mm Unit:mm

名称 Designation	切削刃数 Number of Cutting Edges	适用刀具 Applicable Cutters	刀片尺寸 Insert Size				涂层种类 Grade of Coated Materials	
			IC	厚度 S	后角 AN	RE	XP9040	XC9025
① SCMT042204-DM	4	φ14~16	4.8	2.2	7°	0.4	7818001	7817001
② SCMT052404-DM	4	φ16.5~18	5.4	2.4	7°	0.4	7818002	7817002
③ SCMT062806-DM	4	φ18.5~20.5	6.2	2.8	7°	0.6	7818003	7817003
④ SCMT073206-DM	4	φ21~24	7.2	3.2	7°	0.6	7818004	7817004
⑤ SCMT083608-DM	4	φ24.5~28	8.6	3.6	7°	0.8	7818005	7817005
⑥ SCMT104208-DM	4	φ29~34	10	4.2	7°	0.8	7818006	7817006
⑦ SCMT125008-DM	4	φ35~40	12.3	5	7°	0.8	7818007	7817007

## Accessories

### ■零件 Accessories

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts	
 固定螺丝 Clamping Screw	7808100	FS18538 (Torx 6)	①	SCMT042204-DM
	7808102	FS20540 (Torx 6)	②	SCMT052404-DM
	7808104	FS22550 (Torx 7)	③	SCMT062806-DM
	7808108	FS25560 (Torx 8)	④	SCMT073206-DM
	7808110	FS30573 (Torx 8)	⑤	SCMT083608-DM
	7808111	FS35572 (Torx 15)	⑥	SCMT104208-DM
	7808113	FS45510 (Torx 20)	⑦	SCMT125008-DM

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts			
 扳手 Wrench	7808203	T6-D (Torx 6)	①	SCMT042204-DM	②	SCMT052404-DM
	7808204	T7-D (Torx 7)	③	SCMT062806-DM	-	-
	7808205	T8-D (Torx 8)	④	SCMT073206-DM	⑤	SCMT083608-DM
	7808208	T15-D (Torx 15)	⑥	SCMT104208-DM	-	-
	7808209	T20-D (Torx 20)	⑦	SCMT125008-DM	-	-

扳手请另购。 The wrenches are sold separately from the cutters.

### 加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材料 Best  
○第二推荐材料 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
XP9040	DM	有 Wet	◎	◎		◎	○	
XC9025	DM	有 Wet	○	○	◎	○		

# Cutting Conditions

## 切削条件基准表 Cutting Conditions

加工材料 Work Material	抗损强度·硬度 Tensile Strength·Hardness	切削速度 Vc (m/min) Cutting Speed	进给量 f (mm/rev) Feed Rate			
			φ14~φ20.5	φ21~φ28	φ29~φ34	φ35~φ40
P 软钢、低碳素钢 Mild Steel, Carbon Steel (SS400, S10C) 碳素钢、合金钢 Carbon Steel, Alloy Steel (S50C, SCM440) 模具钢 Die Steel (SKD11, SKD61)	~180HB	200 ( 60 ~ 250)	0.09 (0.06 ~ 0.13)	0.13 (0.1 ~ 0.18)	0.18 (0.13 ~ 0.21)	0.25 (0.2 ~ 0.27)
	~280HB	160 ( 40 ~ 220)	0.09 (0.06 ~ 0.13)	0.13 (0.1 ~ 0.18)	0.18 (0.13 ~ 0.21)	0.25 (0.2 ~ 0.27)
	~280HB	140 ( 40 ~ 180)	0.08 (0.05 ~ 0.12)	0.12 (0.06 ~ 0.15)	0.14 (0.09 ~ 0.18)	0.15 (0.1 ~ 0.2)
M 不锈钢 Stainless Steel (SUS304, SUS420)	~250HB	150 ( 60 ~ 180)	0.08 (0.05 ~ 0.12)	0.1 (0.06 ~ 0.12)	0.15 (0.1 ~ 0.17)	0.18 (0.15 ~ 0.2)
K 铸铁 Cast Iron (FC250) 球墨铸铁 Ductile Cast Iron (FCD400)	~350N/mm <sup>2</sup>	150 ( 60 ~ 180)	0.09 (0.06 ~ 0.13)	0.13 (0.1 ~ 0.18)	0.18 (0.13 ~ 0.21)	0.25 (0.2 ~ 0.27)
	~800N/mm <sup>2</sup>	130 ( 40 ~ 150)	0.09 (0.06 ~ 0.13)	0.12 (0.08 ~ 0.16)	0.16 (0.1 ~ 0.2)	0.2 (0.15 ~ 0.25)
N 铝合金 Aluminum Alloy	~13%Si	220 (100 ~ 800)	0.09 (0.06 ~ 0.2)	0.13 (0.1 ~ 0.25)	0.18 (0.13 ~ 0.3)	0.25 (0.2 ~ 0.35)
S 超耐热合金(湿式) Superalloy (Wet) (Inconel 718) 钛合金(湿式) Titanium Alloy (Wet) (Ti-6Al-4V)	-	30 ( 15 ~ 50)	0.04 (0.02 ~ 0.06)	0.06 (0.03 ~ 0.1)	0.08 (0.04 ~ 0.12)	0.1 (0.06 ~ 0.14)
	-	60 ( 30 ~ 100)	0.06 (0.04 ~ 0.08)	0.08 (0.06 ~ 0.12)	0.1 (0.08 ~ 0.15)	0.12 (0.1 ~ 0.15)

1. 这张切削条件基准表是以水溶性切削油剂作为内部供油。
2. 请使用稀释倍率20倍以下的优质水溶性切削油剂。
3. 不推荐使用不水溶性切削油剂。
4. 这张切削条件基准表适用于孔深3D以下。
5. 这张切削条件基准表的数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。
6. 请确保整洁干净后紧紧地安装刀片。
7. 请牢牢固定加工材料，确保在没有变形，弯曲，震动的情况下加工。
8. 油孔堵塞是造成折损问题的原因，请务必安装供油装置的过滤器。

1. The indicated speeds and feeds are for using water-soluble oil.
2. Suitable cutting fluid is water-soluble in high density (less than 20 times dilution).
3. Using non-water-soluble oil is not recommended.
4. These conditions are for drilling depth less than 3 times the drill diameter.
5. The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.
6. Inserts should be attached to the holder tightly in a very neat condition.
7. Fasten the work material to reduce the possibility of work deformation, deflection of machined surface, or vibration.
8. A clogged oil hole can lead to a breakage. Make sure that a filter is attached to the oil feeder.

# Cutting Data

加工数据 Cutting Data

## Inconel 718 (28HRC) 的高效率加工 High efficiency machining of Inconel 718 (28HRC)

使用工具 Tool	PHP200FS25M06-3D (φ20)
使用刀片(材质) Insert (grade)	SCMT062806-DM (XP9040)
加工材料 Work Material	Inconel 718 (28HRC)
切削速度 Cutting Speed	60m/min (955min <sup>-1</sup> )
进给速度 Feed	57mm/min (0.06mm/rev)
切深量 Depth of Hole	50mm (2.5D 通孔) (Through)
切削油剂 Coolant	水溶性切削油剂(内部给油) Water-Soluble (Internal)
使用机械 Machine	多功能加工机(工件旋转) Multifunction milling machine (rotating workpiece)

使用车床 Inconel 718 (28HRC) 孔加工案例。加工10孔后, PHP 可将切屑细小的分断, 实现稳定的加工。

While drilling holes in Inconel 718 (28HRC) on a lathe, 10 holes were completed, breaking up chips into small pieces and resulting in stable milling.

刀片磨损情况的照片(加工5个孔时) Photo of insert wear width (after 5 holes)



0.147mm

0.113mm

切屑 Chips




## SS400的多层板加工 Stacked milling of SS400

使用工具 Tool	PHP260FS32M08-3D (φ26)	其他公司(高速钢钻头) Competitor (HSS Drill)
使用刀片(材质) Insert (grade)	SCMT083608-DM (XP9040)	-
加工材料 Work Material	SS400	
切削速度 Cutting Speed	80m/min (980min <sup>-1</sup> )	20m/min (245min <sup>-1</sup> )
进给速度 Feed	118mm/min (0.12mm/rev)	25mm/min (0.1mm/rev)
切深量 Depth of Hole	30mm (厚度20mm×10mm 通孔) (Thickness Through)	
切削油剂 Coolant	水溶性切削油剂(外部给油) Water-Soluble (External)	
使用机械 Machine	立式加工中心(BT50) Vertical Machining Center	

厚度为20mm×10mm 的多层板加工案例。过去, 其他公司可转位式钻头在加工多层板时经常发生刀片刀体崩刃折损。因此放弃使用可转位式钻头, 而使用高速钢钻头以低速加工替代。然而 PHP 采用不易在过孔时发生盘状切屑的前角形状, 无论有无外部供油均可稳定加工。

Stacked milling consisted of 20mm × 10mm sheets. In the past, tests using a competitor's indexable drills resulted in the frequent breakage of inserts and bodies. Therefore, high-speed drills at low speeds were used instead of indexable drills. Because the chip of the PHP is shaped with an angle, it suppresses the creation of discs, allowing it to mill in a stable manner even when coolant was fed externally.

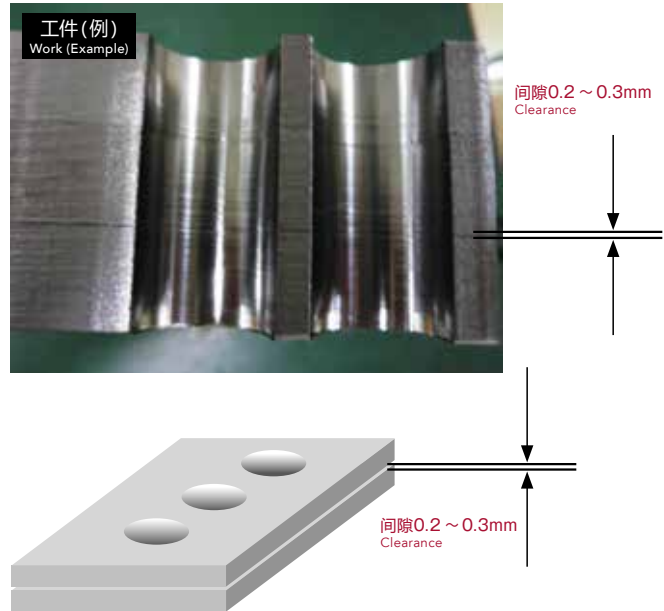


15°倾斜面的加工 Milling of a 15° inclined plane

使用工具 Tool	PHP210FS25M07-3D (φ21)	其他公司A、B Competitor
使用刀片(材质) Insert (grade)	SCMT073206-DM (XP9040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	S50C	
切削速度 Cutting Speed	200m/min (3,033min <sup>-1</sup> )	
进给速度 Feed	364mm/min (0.12mm/rev) [入口: 152mm/min (0.05mm/rev)]	
切深量 Depth of Hole	45mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心 (BT50) Horizontal Machining Center	



15度斜面加工案例, 其他公司产品在入口处会晃动造成扩孔 (蓝圈部分)。PHP 可以承受断续加工的高刚性, 可以抑制入口处的扩孔 (红圈部分)。

When milling a 15° inclined plane, a competitor's product wobbled at entry and enlarged the hole entry (as indicated by the blue circle). Because the PHP has the rigidity to withstand intermittent milling, it inhibits the enlargement of the hole entry (as indicated by the red circle).

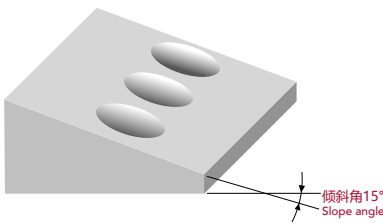

风力发电 (回转支承) 的孔加工 Drilling holes in a wind power generator (rotating wheel)


使用工具 Tool	PHP210FS25M07-3D (φ21)	其他公司产品 Competitor
使用刀片(材质) Insert (grade)	SCMT073206-DM (XP9040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	S45C 相当品 Equivalent	
切削速度 Cutting Speed	165m/min (2,502min <sup>-1</sup> )	
进给速度 Feed	300mm/min (0.12mm/rev)	
切深量 Depth of Hole	57mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式专机 Horizontal Dedicated Machine	



是其他公司产品寿命的 1.3 倍, PHP 在加工 128 孔后仍可以稳定的加工。  
The PHP drilled 128 holes and exhibited stable milling performance. Its durability was 1.3 times that of a competitor's product.

零部件的孔加工 Drilling holes in parts

使用工具 Tool	PHP210FS25M07-3D (φ21)	其他公司产品 Competitor
使用刀片(材质) Insert (grade)	SCMT073206-DM (XP9040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SUS304	
切削速度 Cutting Speed	150m/min (2,275min <sup>-1</sup> )	
进给速度 Feed	272mm/min (0.12mm/rev)	
切深量 Depth of Hole	50mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心 (BT50) Horizontal Machining Center	

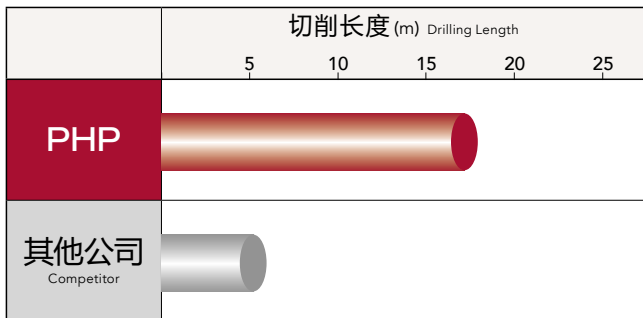

其他公司的产品由于切屑问题而导致不能稳定持久的加工。PHP 在加工时排屑性好, 并能将切屑细小的分断, 可以达到其他公司产品2倍的使用寿命。

A competitor's product could not provide stable durability due to chipping. Our product, however, breaks up chips into small pieces and evacuates them properly, which inhibits durability variances and provides double the durability.

# » Phoenix PZAG

沉孔钻头  
Counterboring Cutter

Phoenix Counterboring Cutter



## ■ 特点 Features

追求切屑分断性能的  
沉孔钻头

Counterboring cutter  
with perfect chip control



为了连续进行沉孔加工,  
切屑分断性尤为重要

Since counterboring process is continuous cutting,  
chip breaking capability is utmost important.

- 强力断屑槽，实现卓越的切屑分断性。
- Excellent chip separation capability with the enhanced muscle breaker corresponding to each cutting edge.



## ■ 丰富的产品系列 Broad size lineup

符合紧固螺栓沉孔尺寸规格的尺寸系列(可对应螺栓尺寸 M8~M52)


Size lineup corresponding to the cap bolt's counterbore hole size (Corresponds to bolt screw sizes M8 to M52)

### ■ 六角螺栓沉孔及螺栓孔的尺寸

Dimensions of counterbore and bolt hole with hexagon socket head bolt




※不可作为面铣刀使用。  
Cannot be used as a face milling  
cutter

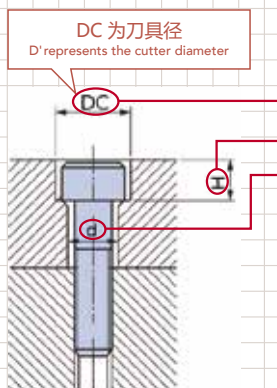



螺纹尺寸 Thread size	M8	M10	M12	M14	M16	M18	M20	M22	M24
DC	14	17.5	20	23	26	29	32	35	39
H	8.6	10.8	13	15.2	17.5	19.5	21.5	23.5	25.5
d	9	11	14	16	18	20	22	24	26

螺纹尺寸 Thread size	M27	M30	M33	M36	M39	M42	M45	M48	M52
DC	43	48	54	58	62	67	72	76	82
H	29	32	35	38	41	44	47	50	54
d	30	33	36	39	42	45	48	52	56



# Specification

### 形状尺寸表 Specification

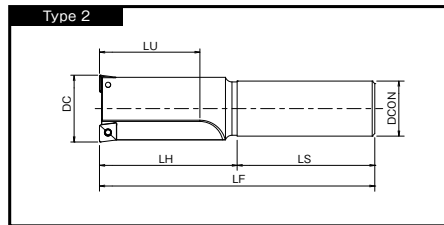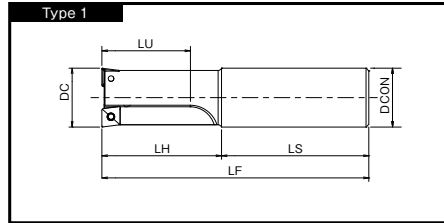

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEPF	柄径 DCON	柄长 LS	全长 LF	颈长 LH	有效加工深度 LU	最小底孔径 Min. Pre-Drilled Dia. 注1)	a <sub>e</sub> 注2) (max)	适用刀片 Applicable Inserts	形状类型 Type
7832100	PZAG04R014SS20-2	14	2	20	70	100	30	21	6	4	①	1
7832101	PZAG06R0175SS20-2	17.5	2	20	70	105	35	26	5.5	6	②	1
7832102	PZAG06R020SS20-2	20	2	20	70	110	40	30	8	6		1
7832103	PZAG06R023SS25-2	23	2	25	75	125	50	34.5	11	6	③	1
7832104	PZAG09R026SS25-2	26	2	25	75	130	55	39	8	9		1
7832105	PZAG09R029SS32-2	29	2	32	80	140	60	43.5	11	9		1
7832106	PZAG09R032SS32-2	32	2	32	80	145	65	48	14	9		1
7832107	PZAG09R035SS32-2	35	2	32	80	150	70	52.5	17	9		2
7832108	PZAG09R039SS32-2	39	2	32	80	160	80	58.5	21	9		2
7832109	PZAG09R043SS32-2	43	2	32	80	170	90	64.5	25	9		2
7832110	PZAG09R048SS32-2	48	2	32	80	180	100	72	30	9		2

注1) 沉孔加工时, 表示底孔的最小值。


These minimum pre-drilled hole sizes are required before counterboring operations.


※ 不可横拉。

Specialized for plunging.

注2): 插铣加工时的最大切深量(a<sub>e</sub>)


Maximum depth of cut in plunge milling





# Specification

■形状尺寸表 Specification

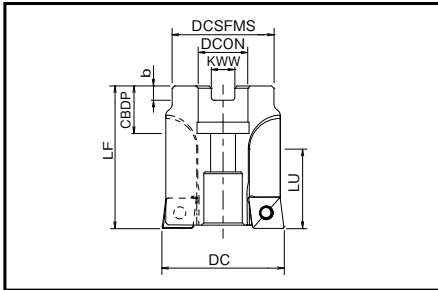

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEPF	全长 LF	有效加工深度 LU	刀盘径 DCSFMS	孔径 DCON	孔径深度 CDDP	端面键槽		最小底孔径 Min. Pre-Drilled Dia. 注1)	ae 注2) (max)	适用刀片 Applicable Inserts
									宽度 KWW	深度 b			
7832111	PZAG13R054M22-4	54	4	63	35	45	22	21	10.4	6.3	29	12.5	④
7832112	PZAG13R058M22-4	58	4	63	38	45	22	21	10.4	6.3	33	12.5	
7832113	PZAG13R062M22-4	62	4	63	41	45	22	21	10.4	6.3	37	12.5	
7832114	PZAG13R067M22-4	67	4	63	44	45	22	21	10.4	6.3	42	12.5	
7832115	PZAG13R072M22-4	72	4	63	47	45	22	21	10.4	6.3	47	12.5	
7832116	PZAG17R076M22-4	76	4	63	50	45	22	21	10.4	6.3	44	16	⑤
7832117	PZAG17R082M22-4	82	4	63	54	45	22	21	10.4	6.3	50	16	


注1) 沉孔加工时, 表示底孔的最小值。

These minimum pre-drilled hole sizes are required before counterboring operations.

※ 不可横拉。



Specialized for plunging.

注2) : 插铣加工时的最大切深(ae)  
Maximum depth of cut in plunge milling



# Inserts

## 形状尺寸表 Specification




## 适用刀片 Applicable Inserts

单位:mm Unit:mm

商品号 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size				形状 Type	适用刀体 Applicable Body	涂层种类 Carbide Coated Materials	
		L×W1	厚度 S	后角 AN	RE			XP8030	XC8035
① ZPNT040104ER	2	6.35×4.45	1.76	11°	0.4	1	φ14	7814101	7815101
② ZPNT060204EN	2	6.95×6.95	2.93	11°	0.4	2	φ17.5~23	7814103	7815103
③ ZPNT090404EN	2	9.94×9.94	4.65	11°	0.4	2	φ26~48	7814106	7815106
④ ZPNT130504EN	2	13.92×13.92	5.46	11°	0.4	2	φ54~72	7814109	7815109
⑤ ZPNT170608EN	2	17.85×17.85	6.31	11°	0.8	2	φ76, 82	7814111	7815111

# Accessories

## 零件 Accessories

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts	适用刀具 Applicable Cutters	推荐安装扭矩 Recommended Tightening Torque
 固定螺丝 Clamping Screw	7808096	FS18536P (Torx 6IP)	① ZPNT04...	PZAG SS φ14	0.7 Nm
	7808138	FS22550P (Torx 7IP)	② ZPNT06...	PZAG SS φ17.5~23	1.0 Nm
	7808135	FS30570P (Torx 9IP)	③ ZPNT09...	PZAG SS φ26~48	2.2 Nm
	7808114	FS45510P (Torx 20IP)	④ ZPNT13...	PZAG BORE φ54~82	5.0 Nm
			⑤ ZPNT17...		

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts	适用刀具 Applicable Cutters
 扳手 Wrench	7808223	6IP-D (Torx 6IP)	① ZPNT04...	PZAG SS φ14
	7808224	7IP-D (Torx 7IP)	② ZPNT06...	PZAG SS φ17.5~23
	7808226	9IP-D (Torx 9IP)	③ ZPNT09...	PZAG SS φ26~48
	7808229	20IP-D (Torx 20IP)	④ ZPNT13...	PZAG BORE φ54~82
			⑤ ZPNT17...	

扳手请另购。 The wrenches are sold separately from the cutters.

Cutting  
Conditions

## 加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材料 Best  
○第二推荐材料 Good

刀片材质 Insert Grades	切削油剂 Coolant	P	M	K	N	S	H
XP8030	有 Wet	◎	◎	○	○	○	○
XC8035	无 Dry	○		◎			
	有 Wet		○				

## ■ 切削条件基准表 Cutting Conditions 沉孔加工·插铣加工通用 For both counterboring and plunge milling

加工材料 Work Material	抗拉强度·硬度 Tensile Strength· Hardness	切削速度 Vc (m/min) Cutting Speed	进给量 f(mm/rev) Feed Rate				
			φ14~φ17.5	φ20~φ23	φ26~φ48	φ54~φ72	φ76~φ82
P 软钢·低碳素钢 Mild Steel, Carbon Steel (SS400, S10C) 碳素钢、合金钢 Carbon Steel, Alloy Steel (S50C, SCM440) 模具钢 Die Steel (SKD11, SKD61)	~180HB	160(100~200)	0.14(0.08~0.2)	0.18(0.1~0.25)	0.2(0.12~0.3)	0.4(0.2~0.6)	0.4(0.2~0.6)
	~280HB	150(100~200)	0.14(0.08~0.2)	0.18(0.1~0.25)	0.2(0.12~0.3)	0.4(0.2~0.6)	0.4(0.2~0.6)
	~280HB	120(80~180)	0.12(0.08~0.15)	0.14(0.1~0.2)	0.18(0.12~0.25)	0.4(0.2~0.5)	0.4(0.2~0.5)
M 不锈钢 Stainless Steel (SUS304, SUS420)	~250HB	130(80~180)	0.1(0.08~0.15)	0.12(0.1~0.2)	0.16(0.12~0.25)	0.35(0.2~0.5)	0.35(0.2~0.5)
K 铸铁 Cast Iron (FC250) 球墨铸铁 Ductile Cast Iron (FCD400)	~350N/mm <sup>2</sup>	200(150~280)	0.16(0.08~0.25)	0.2(0.1~0.3)	0.3(0.15~0.4)	0.6(0.3~0.8)	0.6(0.3~0.8)
	~800N/mm <sup>2</sup>	160(100~220)	0.14(0.08~0.2)	0.18(0.1~0.25)	0.2(0.15~0.3)	0.4(0.3~0.6)	0.4(0.3~0.6)
N 铝合金 Aluminum Alloy	~13%Si	200(100~800)	0.16(0.08~0.25)	0.2(0.1~0.3)	0.3(0.15~0.4)	0.6(0.3~0.8)	0.6(0.3~0.8)
S 超耐热合金(湿式) Superalloy (Wet) (Inconel 718) 钛合金(湿式) Titanium Alloy (Wet) (Ti-6Al-4V)	-	50(30~60)	0.08(0.05~0.14)	0.08(0.06~0.14)	0.12(0.08~0.2)	0.25(0.16~0.4)	0.25(0.16~0.4)
	-	60(30~100)	0.08(0.05~0.14)	0.1(0.06~0.16)	0.14(0.08~0.2)	0.3(0.16~0.5)	0.3(0.16~0.5)
H 预硬钢 Pre-hardened Steel (NAK80) 调质钢 Hardened Steel (SKD11)	40~43HRC	100(60~120)	0.08(0.05~0.14)	0.1(0.06~0.16)	0.14(0.08~0.2)	0.3(0.16~0.5)	0.3(0.16~0.5)
	50~55HRC	60(40~80)	0.08(0.05~0.14)	0.08(0.05~0.14)	0.12(0.08~0.2)	0.25(0.16~0.4)	0.25(0.16~0.4)

1. 这张切削条件基准表的数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。
2. 请确保整洁干净后紧紧地安装刀片。
3. 请牢牢固定加工材料，确保在没有变形，弯曲，振动的情况下加工。


1. The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.
2. Inserts should be attached to the holder tightly in a very neat condition.
3. Fasten the work material to reduce the possibility of work deformation, deflection of machined surface, or vibration.

# Cutting Data

加工数据 Cutting Data

## S50C的沉孔加工 Counterboring in S50C

使用工具 Tool	PZAG09R026SS25-2 (φ26×2刃)
使用刀片(材质) Insert (grade)	ZPNT090404EN (XC8035)
加工材料 Work Material	S50C
切削速度 Cutting Speed	150m/min (1,837min <sup>-1</sup> )
进给速度 Feed	550mm/min (0.3mm/rev)
沉孔深度 Counterbore Depth	17.5mm
切削油剂 Coolant	干式 Dry
使用机械 Machine	立式加工中心(BT50) Vertical Machining Center



在M16紧固螺栓用的沉孔加工中, 实现了良好的切屑分断性, 稳定的连续加工。


In the counterboring of a M16 cap bolt, excellent chip breaking was performed, enabling consecutive processing.

## SS400大型零部件的沉孔加工 Counterboring of large parts in SS400

使用工具 Tool	PZAG17R076M22-4 (φ76×4刃)	其他公司高速钢铣刀 (φ30×4刃) Competitor's HSS Endmill
使用刀片(材质) Insert (grade)	ZPNT170608EN (XP8030)	
加工材料 Work Material	SS400	
切削速度 Cutting Speed	112m/min (470min <sup>-1</sup> )	30m/min (318min <sup>-1</sup> )
进给速度 Feed	140mm/min (0.3mm/rev) 0.5mmステップ Step	127mm/min (0.1mm/t)
沉孔深度 Counterbore Depth	51mm	ap=51mm ae=3mm×4パス Pass
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	龙门加工中心(BT50) Double Column Machining Center	

	加工时间 (分/孔) Cutting Time (min./hole)					
	0.5	1	1.5	2	2.5	3
PZAG						
其他公司产品 Competitor						

使用高速钢铣刀进行SS400的大型零部件的螺栓孔沉孔加工。以往1孔的加工时间需要3分钟, 但是使用PZAG加工只需1分半钟, 缩短了一半时间。  
A HSS end mill was used in the counterboring of a bolt for a large part in SS400. The PZAG was able to reduce machining time by half from 3 minutes per hole to 1.5 minutes.



# » Phoenix PAS



方形刀片面铣刀  
45° Face Milling Square Insert Type


Phoenix 45° Square

## ■ 刀片形状 Insert form

**正前角断屑槽实现高刚性，并且减轻加工时的切削阻力**

Positive breaker enables high rigidity and reduces cutting force resistance

- 规格为里外4角(共8角)。最大切深量6.5mm。  
4 cutting edges per side (a total of 8 corners) specifications, 6.5 mm maximum depth of cut.
- 从粗加工到精加工，适用范围广泛。  
Applicable in a wide range of work stages, from rough milling to finishing.



**正前角刃形减轻切削阻力**

The positive edge reduces cutting resistance

## ■ 高精度精加工面 High precision surface finishing


工具: PAS15R080M25.4-6 (SNKU1505AZER-GR XC1015)

使用机械: 立式加工中心 (BT50)  
Machine: Vertical Machining Center

加工材料: FCD500  
Work Material

切削条件:  $V_c=250\text{m/min}$  ( $n=995\text{min}^{-1}$ )  $V_f=597\text{mm/min}$  ( $f_z=0.1\text{mm/t}$ )  $a_p=0.2\text{mm}$   $a_e=50\text{mm}$  干式 Dry

底面粗糙度 Bottom roughness

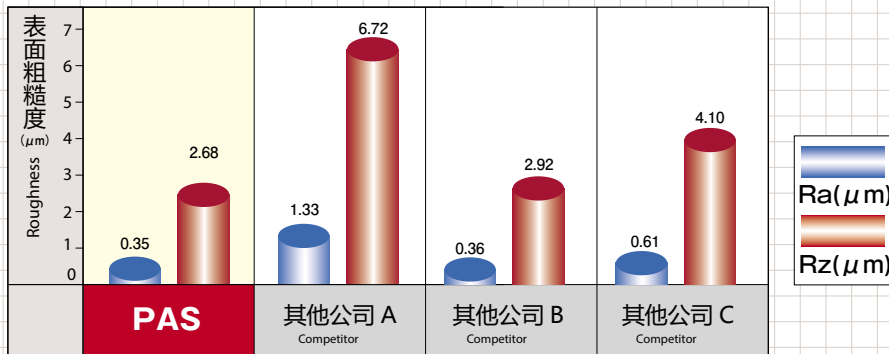


## ■ 低阻力加工 Low resistance machining



工具: PAS15R080M25.4-6 (SNKU1505AZER-GR XC1015)

使用机械: 立式加工中 (BT50)  
Machine: Vertical Machining Center

加工材料: FCD500  
Work Material



切削条件:  $V_c=180\text{m/min}$  ( $n=716\text{min}^{-1}$ )  $V_f=860\text{mm/min}$  ( $f_z=0.2\text{mm/t}$ )  $a_p=3\text{mm}$   $a_e=50\text{mm}$  干式 Dry

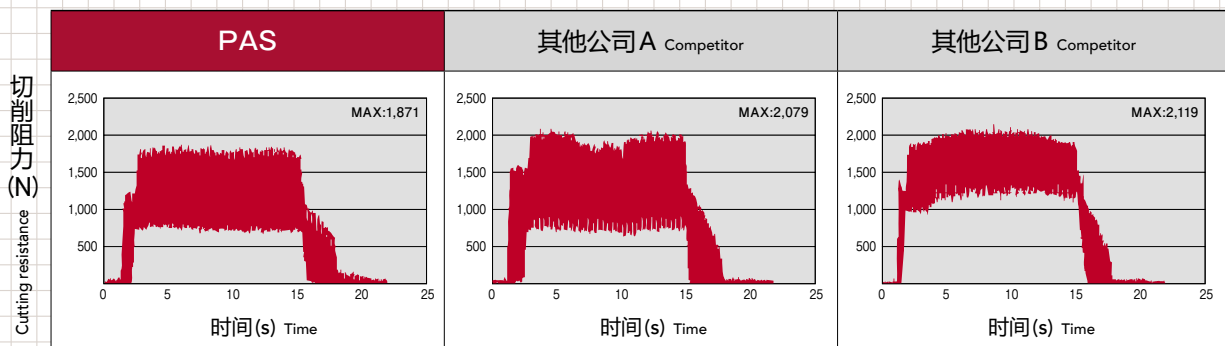



## Specification



形状尺寸表 Specification

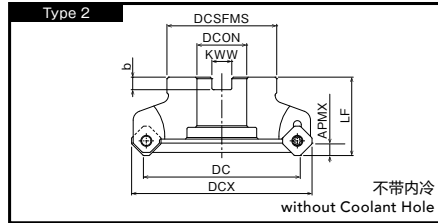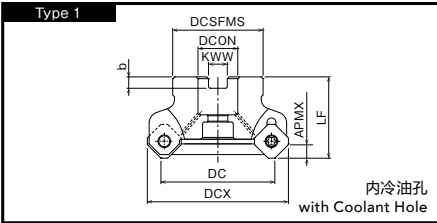

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刀具外径 DCX	刃数 ZEFP	刀具高度 LF	刀盘径 DCSFMS	孔径 DCON	端面键槽 Key Slot		APMX	重量 (kg)	形状类型 Type
								宽度 kWW	深度 b			
7802000	PAS15R050M22-4	50	65	4	45	45	22	10.4	6.3	6.5	0.41	1
7802001	PAS15R063M22-5	63	78	5	45	50	22	10.4	6.3	6.5	0.59	1
7802002	PAS15R080M25.4-6	80	95	6	50	60	25.4	9.5	6	6.5	1.06	1
7802003	PAS15R100M31.7-7	100	115	7	50	70	31.75	12.7	8	6.5	1.52	2
7802004	PAS15R125M38.1-8	125	140	8	63	90	38.1	15.9	10	6.5	3.25	2

## Inserts

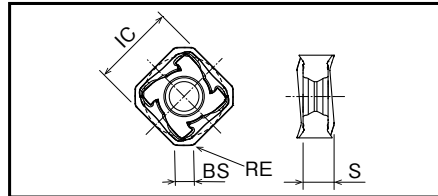

单位:mm Unit:mm

适用刀片 Inserts

名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size				涂层种类 Grade of Coated Materials			
		IC	厚度 S	RE	副切削刃 BS	XC3025	XP3035	XP2040	XC1015
SNKU1505AZER-GM	8	15.88	7.18	1.0	3.65	7819061	7814061	7813061	
SNKU1505AZER-GR	8	15.88	7.18	1.0	3.65				7812060

## Accessories

零件 Accessories

	商品号 EDP No.	名称 Designation	适用刀具 Applicable Cutters
 固定螺丝 Clamping Screw	7808131	FS45513P (Torx 20IP)	PAS BORE φ50~125

	商品号 EDP No.	名称 Designation	适用刀具 Applicable Cutters
 T型扳手 T-Handle Wrench	7808000	20IP-T (Torx 20IP)	PAS BORE φ50~125

扳手请另购。 The wrenches are sold separately from the cutters.

# Phoenix

方形刀片面铣刀  
45° Face Milling Square Insert Type

## PAS

### 加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材料 Best  
○第二推荐材料 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
XC3025	GM	无 Dry	◎		○			
XP3035	GM	无 Dry	◎	○	○			
		有 Wet						
XP2040	GM	无 Dry	○	○				○
		有 Wet	○	◎			○	
XC1015	GR	无 Dry			◎			

GM:中切削用 GR:重切削用  
GM:Middle Cutting GR:Heavy Cutting

## Cutting Conditions

### 切削条件基准表 Cutting Conditions

	加工材料 Work Material	抗损强度·硬度 Tensile Strength·Hardness	切削速度 VC (m/min) Cutting Speed	每刃进给量 fz (mm/t) Feed per Tooth	切削深度 ap (mm) Depth of Cut
P	软钢、低碳素钢 Mild Steel, Carbon Steel (SS400, S10C)	~180HB	180 (100 ~ 250)	0.18 (0.15 ~ 0.35)	3
	碳素钢、合金钢 Carbon Steel, Alloy Steel (S50C, SCM440)	~280HB	180 (100 ~ 250)	0.18 (0.15 ~ 0.35)	3
	模具钢 Die Steel (SKD11, SKD61)	~280HB	150 (80 ~ 200)	0.15 (0.1 ~ 0.3)	3
M	不锈钢(湿式) Stainless Steel (Wet) (SUS304, SUS420)	~250HB	120 (80 ~ 180)	0.12 (0.08 ~ 0.25)	3
K	铸铁 Cast Iron (FC250)	~300N/mm <sup>2</sup>	180 (100 ~ 350)	0.2 (0.15 ~ 0.35)	4
	球墨铸铁 Ductile Cast Iron (FCD400)	~600N/mm <sup>2</sup>	180 (100 ~ 270)	0.2 (0.1 ~ 0.3)	3
H	预硬钢 Pre-hardened Steel (NAK80)	40~43HRC	100 (60 ~ 150)	0.12 (0.08 ~ 0.2)	1.5
	铸件用钢 Steel for Die Casting (DAC-MAGIC, DH31)	43~48HRC	80 (40 ~ 120)	0.1 (0.05 ~ 0.15)	0.5
	调质钢 Hardened Steel (SKD11)	50~60HRC	60 (40 ~ 90)	0.08 (0.05 ~ 0.15)	0.5


· 上述数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。  
The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.

# Cutting Data

加工数据 Cutting Data

## 冲压模具基准面粗加工 Die mold surface, rough milling

使用工具 Tool	PAS15R100M31.7-7 ( $\phi 100 \times 7$ 刀)	其他公司 $\phi 63$ Competitor
使用刀片(材质) Insert (grade)	SNKU1505AZER-GR (XC1015)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	FCD500	
切削速度 Cutting Speed	200m/min (637min <sup>-1</sup> )	120m/min (600min <sup>-1</sup> )
进给速度 Feed	1,500mm/min (0.37mm/t)	2,700mm/min (0.9mm/t)
切削深度 Depth of Cut	3mm	1mm
切削宽度 Width of Cut	MAX 60mm	MAX 40mm
切削油剂 Coolant	气冷式 Air Blow	
使用机械 Machine	龙门加工中心 (BT50) Double Column Machining Center	

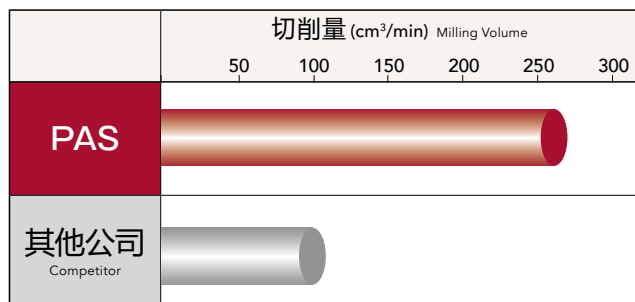


以往使用其他公司的高速进给工具时, 由于其切深量不大, 所以对余量不均匀的工件大多造成空切, 但使用 PAS 后由于其切深量大, 可以减少空切的次数, 且切削量也增多2.5倍, 加工时间可以减少60%。

In the past, due to the limited depth of cut, competitor's high feed cutters often leave a large amount of work material uncut, creating a need for aircut. This challenge has been overcome with the introduction of the PAS, which is capable of milling difficult-to-reach areas, thus eliminating 2.5 times more work materials than competitor's high feed cutters and decreasing machining time by 60%.

## 零部件的粗加工 Rough milling of parts

使用工具 Tool	PAS15R080M25.4-6 ( $\phi 80 \times 6$ 刀)	其他公司 A、B Competitor
使用刀片(材质) Insert (grade)	SNKU1505AZER-GM (XP3035)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	S50C	
切削速度 Cutting Speed	200m/min (796min <sup>-1</sup> )	
进给速度 Feed	955mm/min (0.2mm/t)	
切削深度 Depth of Cut	$a_p=2\text{mm}$ $a_e=50\text{mm}$	
切削油剂 Coolant	气冷式 Air Blow	
使用机械 Machine	立式加工中心 (BT50) Vertical Machining Center	

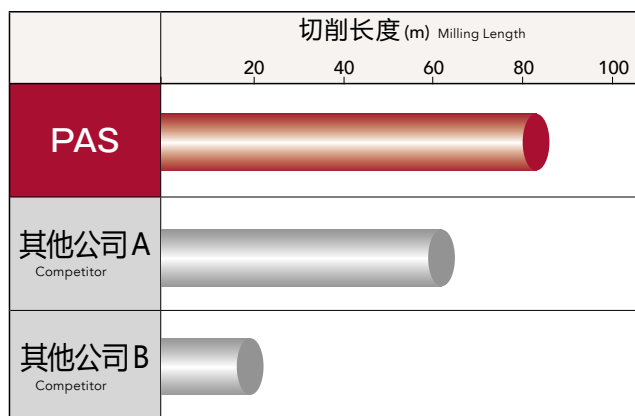

使用各家厂家的产品对零部件进行粗加工并做比较, 其他公司的产品较早开始磨损和崩刃, 但是 PAS 的磨损是正常磨损, 耐久是1.4倍以上。

Competitors' products and the PAS were compared in the rough milling stage under identical conditions. The competitors' tools had large chippings and were worn out at early stages. The PAS, in contrast, showed normal cutting wear and attained more than 1.4 times the durability.

# » Phoenix PAO

45度角面铣刀  
45° Face Milling Octagon Insert Type

Phoenix 45° Octagon



## ■ 刀片形状 Insert form




**负前角刃型及正后角兼备，刚性更高，切削锋利性更好。**

Achieves high rigidity and ultra sharp cutting edge with the negative cutter form and positive relief angle

- 规格为经济性很好的里外8角(共16角)。最大的切深量为3.5mm。  
An economical 8 corners per side (16 corners in total) specification, 3.5 mm maximum depth of cut.

- 由于副切削刃形状，提高了表面精度。  
副切削刃为 2mm

The new cutting edge geometry of the secondary blade further improves surface roughness.  
Secondary cutting blade : 2mm.

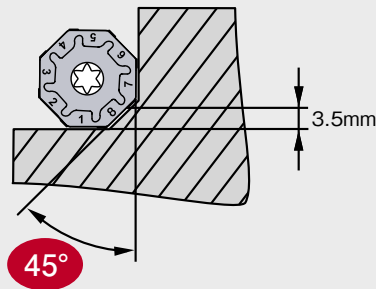

- 每个刀片的数字可合起来后安装，所以能抑制不均匀的情况。  
Each insert edge is individually numbered.  
By matching the numbers during setup, runout can be minimized.

## ■ 高精度精加工面(修光刃)

High precision surface finishing (Wiper Insert)


工具 : PAO06R160M50.8W-20 (OZKU060508SR-GM XC1015)


刀片 : XAHT060525SR-GM XP3035

使用机械 : 立式加工中心 (BT50)  
Machine : Vertical Machining Center

加工材料 : FCD500




切削条件 :  $V_c=250\text{m/min}$  ( $n=500\text{min}^{-1}$ )  $V_f=1,500\text{mm/min}$  ( $f_z=0.15\text{mm/t}$ )  $a_p=0.2\text{mm}$   $a_e=120\text{mm}$  干式 Dry

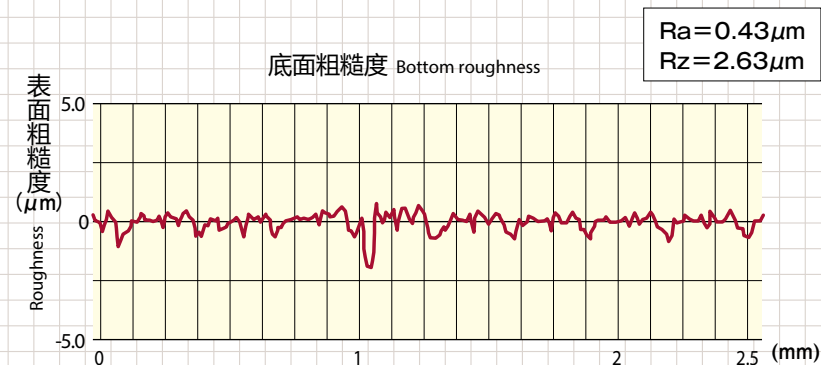



# Specification



### 形状尺寸表 Specification

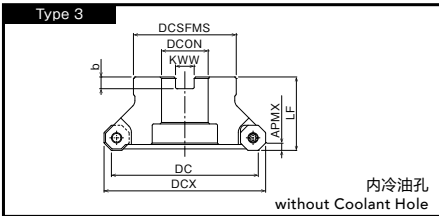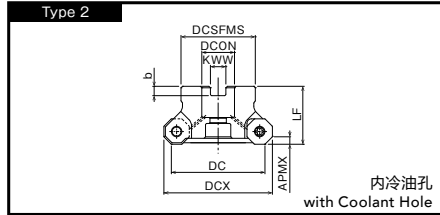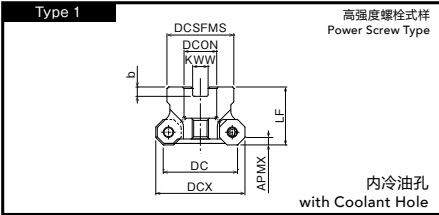

### 螺纹紧锁型 Screw type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刀具外径 DCX	刃数 ZEFP	刀具高度 LF	刀盘径 DCSFMS	孔径 DCON	端面键槽 Key Slot		APMX	重量 (kg)	形状类型 Type
								宽度 KWW	深度 b			
7802020	PAO06R050M22-5	50	60.2	5	40	45	22	10.4	6.3	3.5	0.35	1
7802021	PAO06R063M22-7	63	73.2	7	40	50	22	10.4	6.3	3.5	0.51	2
7802022	PAO06R080M25.4-8	80	90.2	8	50	60	25.4	9.5	6	3.5	1.05	2
7802023	PAO06R100M31.7-10	100	110.2	10	50	70	31.75	12.7	8	3.5	1.51	3
7802024	PAO06R125M38.1-12	125	135.2	12	63	90	38.1	15.9	10	3.5	2.98	3

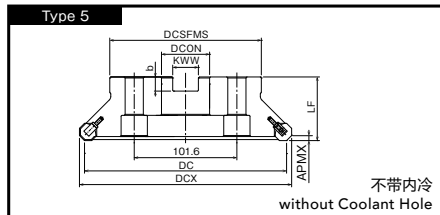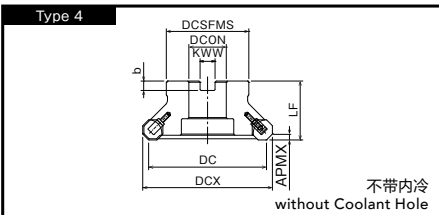

### 楔子紧锁型 Wedge type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刀具外径 DCX	刃数 ZEFP	刀具高度 LF	刀盘径 DCSFMS	孔径 DCON	端面键槽 Key Slot		APMX	重量 (kg)	形状类型 Type
								宽度 KWW	深度 b			
7802089	PAO06R100M31.7W-14	100	110.2	14	50	70	31.75	12.7	8	3.5	1.37	4
7802091	PAO06R125M38.1W-17	125	135.2	17	63	90	38.1	15.9	10	3.5	2.81	4
7802093	PAO06R160M50.8W-20	160	170.2	20	63	100	50.8	19	11	3.5	4.50	4
7802095	PAO06R200M47.6W-25	200	210.2	25	63	150	47.625	25.4	14	3.5	7.75	5

# Phoenix



45度角面铣刀

45° Face Milling Octagon Insert Type

## PAO刀片

Inserts

## Inserts



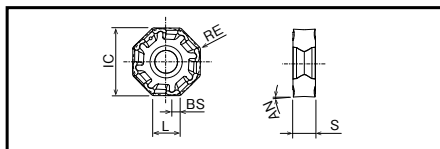


单位:mm Unit:mm

### 适用刀片 Inserts

名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size						涂层种类 Grade of Coated Materials								
		内接圆径 IC	厚度 S	L	后角 AN	RE	副切削刃 BS	XC3020	XP3025	XC3030	XP3035	XP2025	XP2040	XC1015	XP1020	XC5040
OZKU060508SR-GL	16	17.1	5.66	6	3°	0.8	2	7827063	7828063	7825063	7814063	7826063	7813063			
OZKU060508SR-GM	16	17.1	5.66	6	3°	0.8	2	7827062	7828062	7825062	7814062	7826062	7813062	7812062	7821062	
OZKU060508SR-GR	16	17.1	5.66	6	3°	0.8	2							7812086	7821086	
OZKU060508ER-SM	16	17.1	5.66	6	3°	0.8	2									7816085

修光刃安装示意图  
How to install wiper inserts

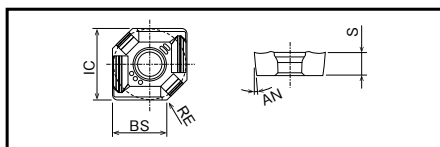

单位:mm Unit:mm

### 修光刃刀片 Wiper Insert

名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size					涂层种类 Grade of Coated Materials	
		内接圆径 IC	厚度 S	副切削刃 BS	后角 AN	RE	XP3035	XC1015
XAHT060525SR-GM	2	17.1	5.56	10	3°	2.5	7814064	7812064

## Accessories

### 零件 Accessories

商品号 EDP No.	名称 Designation	适用刀具 Applicable Cutters
固定螺丝 Clamping Screw	7808130	FS50614 (Torx 20)
高强度螺栓 Power Screw	7808151	PS1031 (M10×31)
楔子 Wedge	7808141	W12F-06N (M6)
楔用紧固螺钉 Clamping Screw for Wedge	7808140	WS0621T (M6×21)

商品号 EDP No.	名称 Designation	适用刀具 Applicable Cutters
扳手 Wrench	7808208	T15-D (Torx 15)
	7808209	T20-D (Torx 20)

扳手请另购。 The wrenches are sold separately from the cutters.

# Cutting Conditions

## 加工材料推荐

Recommended Materials by Insert Type

 ◎第一推荐材料 Best  
 ○第二推荐材料 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K		N	S	H
					FC	FCD			
XC3020	GL GM	无 Dry	◎			○			
XP3025	GL GM	有 Wet	◎			○			
XC3030	GL GM	无 Dry	◎			○			
XP3035	GL GM	无 Dry	◎	○		○			
		有 Wet							
XP2025	GL GM	有 Wet	○	◎				○	
		无 Dry	○	◎					○
XP2040	GL GM	无 Dry	○	◎					○
		有 Wet	○	◎				○	
XC1015	GM GR	无 Dry			◎	○			
					○	◎			
XP1020	GM GR	无 Dry			○	◎			
XC5040	SM	有 Wet		○				◎	

 GM: 中切削用 GR: 重切削用 SM: 耐热合金用  
 GL: Light Cutting GM: Middle Cutting GR: Heavy Cutting SM: Heat Resistant Alloy

## 切削条件基准表 Cutting Conditions

	加工材料 Work Material	抗损强度·硬度 Tensile Strength·Hardness	切削速度 VC (m/min) Cutting Speed	每刃进给量 fz (mm/t) Feed per Tooth	切削深度 ap (mm) Depth of Cut
P	软钢·低碳素钢 Mild Steel, Carbon Steel (SS400, S10C)	~180HB	180 (100 ~ 250)	0.25 (0.2 ~ 0.5)	2
	碳素钢·合金钢 Carbon Steel, Alloy Steel (S50C, SCM440)	~280HB	180 (100 ~ 250)	0.25 (0.2 ~ 0.5)	2
	模具钢 Die Steel (SKD11, SKD61)	~280HB	150 (80 ~ 200)	0.25 (0.15 ~ 0.4)	2
M	不锈钢(湿式) Stainless Steel (Wet) (SUS304, SUS420)	~250HB	120 (80 ~ 180)	0.2 (0.15 ~ 0.4)	2
K	铸铁 Cast Iron (FC250)	~300N/mm <sup>2</sup>	200 (100 ~ 350)	0.3 (0.2 ~ 0.5)	2
	球墨铸铁 Ductile Cast Iron (FCD400)	~600N/mm <sup>2</sup>	180 (100 ~ 270)	0.28 (0.15 ~ 0.4)	2
S	耐热合金 Heat Resistant Alloy (Inconel 718)	-	35 (25 ~ 60)	0.12 (0.05 ~ 0.2)	1
	钛合金 Titanium Alloy (Ti-6Al-4V)	-	40 (30 ~ 120)	0.15 (0.1 ~ 0.25)	1.5
H	预硬钢 Pre-hardened Steel (NAK80)	40~43HRC	100 (60 ~ 150)	0.15 (0.1 ~ 0.25)	1.5
	铸件用钢 Steel for Die Casting (DAC-MAGIC, DH31)	43~48HRC	80 (40 ~ 120)	0.12 (0.05 ~ 0.2)	0.5
	调质钢 Hardened Steel (SKD11)	50~60HRC	60 (40 ~ 90)	0.1 (0.05 ~ 0.2)	0.5



· 上述数值是实际切削速度的标准数据。请根据加工环境适当调整。  
 The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.

# Cutting Data

加工数据 Cutting Data

## 液压阀的粗加工 Rough milling of hydraulic valve parts

使用工具 Tool	PAO06R160M50.8W-20 ( $\phi 160 \times 20$ 刃)	其他公司 Competitor
使用刀片(材质) Insert (grade)	OZKU060508SR-GM (XC1015)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	FCD600	
切削速度 Cutting Speed	250m/min (500min <sup>-1</sup> )	
进给速度 Feed	3,000mm/min (0.3mm/t)	
切削深度 Depth of Cut	ap=3mm ae=120mm	
切削油剂 Coolant	气冷式 Air Blow	
使用机械 Machine	立式加工中心 (BT50) Vertical Machining Center	

	加工工件数量 Number of Processed Workpiece			
	5	10	15	20
PAO				
其他公司 Competitor				

加工件上存在许多孔，是条件较苛刻的断续性加工。在如此苛刻条件下也能进行很稳定的高速加工，每一个角的耐久性也大幅度地提高，有助于降低成本。

The workpiece, on which had multiple holes, required intermitted machining. However, this product enabled stable machining under the high speed condition and better durability per cutting edge, which will contribute to cost reduction.



### 加工16个工件后刀片的照片 After 16 workpieces of milling



主切削刃部磨损 Wear on main cutting edge

## 机床零部件的粗加工 Roughing of machinery parts

使用工具 Tool	PAO06R125M38.1-12 ( $\phi 125 \times 12$ 刃)	其他公司 Competitor
使用刀片(材质) Insert (grade)	OZKU060508SR-GM (XC1015)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	FC250	
切削速度 Cutting Speed	200m/min (500min <sup>-1</sup> )	157m/min (400min <sup>-1</sup> )
进给速度 Feed	1,800mm/min (0.3mm/t)	1,000mm/min (0.3mm/t)
切削深度 Depth of Cut	ap=2mm ae=90mm	
切削油剂 Coolant	气冷式 Air Blow	
使用机械 Machine	龙门加工中心 (BT50) Double Column Machining Center	



	加工工件数量 Number of Processed Workpiece			
	1	2	3	4
PAO				
其他公司 Competitor				

由于能抑制切削抵抗，所以能进行效率提高1.8倍的稳定加工，并且寿命达到其他公司的1.5倍。

By reducing cutting resistance, efficiency can be increased by 1.8 times and tool life can be prolonged 1.5 times.

## 液压阀的粗加工 Roughing of oil pressure valve

使用工具 Tool	PAO06R125M38.1-12 ( $\phi 125 \times 12$ 刃)	其他公司 Competitor
使用刀片(材质) Insert (grade)	OZKU060508SR-GM (XC1015)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	FCD500	
切削速度 Cutting Speed	150m/min (380min <sup>-1</sup> )	150m/min (300min <sup>-1</sup> )
进给速度 Feed	900mm/min (0.2mm/t)	720mm/min (0.27mm/t)
切削深度 Depth of Cut	ap=3mm ae=50~80mm	
切削油剂 Coolant	气冷式 Air Blow	
使用机械 Machine	龙门加工中心 (BT50) Double Column Machining Center	


	加工工件数量 Number of Processed Workpiece			
	4	8	12	16
PAO				
其他公司 Competitor				

以往使用的刀具为单面8角规格，但是PAO能使用的角数增多了2倍，减少了每个角的单价。并且切削量也增加了25%，寿命提高了2倍。

The 8-corner type has been used previously, but with the PAO, the amount of milled materials can be increased by 25 percent, with twice as much tool life. In addition, the number of corners has also doubled, leading to a decrease in tooling cost.

## Inconel 718的长寿命加工 Long tool life on Inconel 718

使用工具 Tool	PAO06R125M38.1-12 ( $\phi 125 \times 12$ 刃)	其他公司 Competitor
使用刀片(材质) Insert (grade)	OZKU060508ER-SM (XC5040)	双面式样刀片 Double-sided Insert
加工材料 Work Material	Inconel 718	
切削速度 Cutting Speed	40m/min (100min <sup>-1</sup> )	
进给速度 Feed	120mm/min (0.1mm/t)	
切削深度 Depth of Cut	ap=1.5mm ae=50mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	立式加工中心(BT50) Vertical Machining Center	





其他公司产品在早期就会发生崩刃·磨损, PAO(XC5040)可以抑制磨损并提高约4倍寿命。

The competitor tool exhibited chipping and breakage at an early stage. In contrast, the PAO (XC5040) demonstrated strong resistance to wear and achieved four times the durability versus the competition.

## 冲压模具基准面粗加工 Die mold surface, rough milling

使用工具 Tool	PAO06R100M31.7-10 ( $\phi 100 \times 10$ 刃)
使用刀片(材质) Insert (grade)	OZKU060508SR-GR (XC1015)
加工材料 Work Material	FCD500相当 Equivalent
切削速度 Cutting Speed	150m/min (477min <sup>-1</sup> )
进给速度 Feed	1,400mm/min (0.3mm/t)
切削深度 Depth of Cut	ap=3mm ae=60mm
切削油剂 Coolant	气冷式 Air Blow
使用机械 Machine	龙门加工中心(BT50) Double Column Machining Center
加工时间 Milling Time	2小时30分 Hours Minutes



以往产品因切削性不足发生激烈的断续加工造成多处磨损。而高刚性的GR 断屑槽则可以稳定加工并提高寿命。

Excessive tool wear is a challenge for demanding intermittent milling and difficult-to-machine materials. OSG's rigid GR insert breaker ensures stable milling and prolongs durability.

# » Phoenix PSF

四角刀片方肩铣刀系列  
4-corner Shoulder Cutter Series

Phoenix Shoulder Face Milling



## ■ 刀片形状 Insert form

- 4圆弧角式样：正方形刀片  
Four-corner type: Positive square type insert
- 适合低切深的小型刀片(9.07x9.07mm)  
Compact size insert for low depth of cut
- 高锋利性的三维断屑槽刀片实现低阻力的加工!  
The sharpness of the three-dimensional breaker insert enables low-resistance milling!



## ■ 最适合小型加工中心的加工

Optimal for milling with compact machining center

— 低切深( $ap=3\text{mm}$  以下) 的领域中发挥优越性能

Superior performance for short cutting depths ( $ap = 3\text{mm}$  or less).

- 长寿命 Long tool life
- 高效率 High efficiency

— 多圆弧角体现其高性价比 Multiple corners for high cost performance

- 使用4圆弧角时，最大切深5mm (Using 4 corners - maximum cutting depth 5mm)
- (使用2圆弧角时，最大切深8mm) (Using 2 corners - maximum cutting depth 8mm)

## ■ 与PSE 的区别 Difference in use from the PSE


	圆弧角数 Number of Corners	成本 Cost	加工精度(侧面) Milling Accuracy (side)	多功能性 Multiple Functions
 <b>PSF</b> 最适合平面加工 Optimal for plane milling	4	◎	△	○
 ※1 <b>PSE</b> 最适合多功能加工 (螺旋线加工, 斜线加工等) Optimal for multiple functions (helical, ramping, etc.)	2	△	○	◎

※1 方肩铣刀(PSE)的详情请参照P.85。 ※1 For details on the Phoenix shoulder cutters (PSE), please refer to p.85

## ■ 丰富的刀片种类 A wide variety of Inserts

断屑槽 Insert Breaker	NM	GL	GM	GR
用途 Application	铝合金·非铁金属加工 Aluminum alloy & Non-ferrous metal	低阻力加工 耐热合金·难削材加工 Low-resistance machining-Heat-resistant alloy & Difficult-to-machine material	通用加工 一般钢加工 Multi-purpose machining & General steel milling	断续加工 铸铁加工 Intermittent machining & Cast iron machining
				



# Phoenix Specification

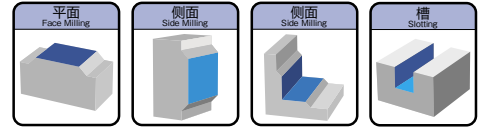

■ 形状尺寸表 Specification

四角刀片方肩铣刀 直柄型  
4-corner Shoulder Cutter with Straight Shank

## PSF SS

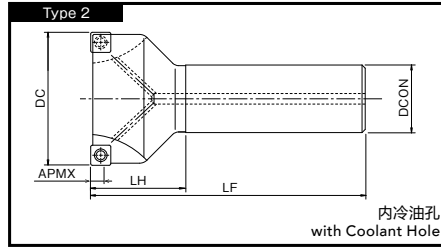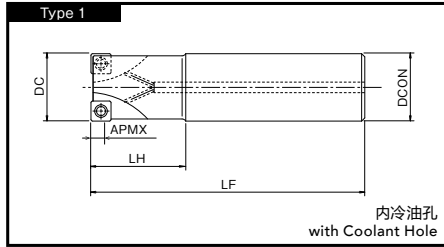


单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEFP	柄径 DCON	全长 LF	颈长 LH	APMX	重量 (kg)	形状 类型 Type
7803001	PSF09R025SS25-3S	25	3	25	120	35	5	0.40	1
7803002	PSF09R032SS32-4S	32	4	32	130	45	5	0.72	1
7803003	PSF09R040SS32-5S	40	5	32	140	50	5	0.88	2

四角刀片方肩铣刀 刀盘型  
4-corner Shoulder Cutter with Bore Type


## PSF BORE

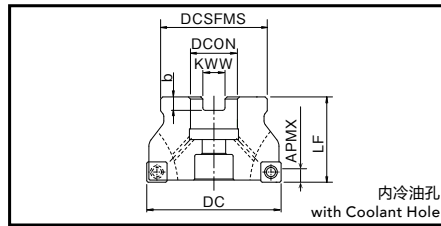

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEFP	刀具高度 LF	刀盘径 DCSFMS	孔径 DCON	端面键槽 Key Slot		APMX	重量 (kg)
							宽度 kww	深度 b		
7803011	PSF09R050M22-6	50	6	40	45	22	10.4	6.3	5	0.30
7803012	PSF09R063M22-7	63	7	40	50	22	10.4	6.3	5	0.50
7803013	PSF09R080M25.4-9	80	9	50	60	25.4	9.5	6	5	1.02

## Inserts

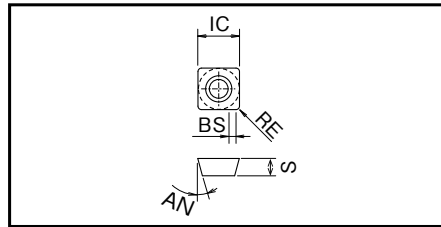

单位:mm Unit:mm

■ 适用刀片 Inserts

名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size					副切削刃 BS	涂层种类 Grade of Coated Materials				
		IC	厚度 S	后角 AN	RE	硬质合金 Uncoated		涂层的种类				
								CK010	XC3030	XP3035	XP2040	XC1015
SDHT09T308FR-NM	4	9.07	3.97	15°	0.8	2.5	7811076		-	-	-	-
SDKT09T308SR-GL	4	9.07	3.97	15°	0.8	2.5	-	7825073	7814073	7813073	-	7816073
SDKT09T308SR-GM	4	9.07	3.97	15°	0.8	2.5	-	7825074	7814074	7813074	-	-
SDKT09T308SR-GR	4	9.07	3.97	15°	0.8	2.5	-	-	-	-	7812075	-

库存种类都为○(即标准库存品) Stock are categorized as ○ (Standard stock item).

# Phoenix

## 四角刀片方肩铣刀系列

4-corner Shoulder Cutter Series

# PSF

## Accessories

### 零件 Accessories

	商品号 EDP No.	名称 Designation	适用刀具 Applicable Cutters
 固定螺丝 Clamping Screw	7808110	FS30573 (Torx 8)	PSF SS $\phi 25\sim 40$ PSF BORE $\phi 50\sim 80$

	商品号 EDP No.	名称 Designation	适用刀具 Applicable Cutters
 扳手 Wrench	7808205	T8-D (Torx 8)	PSF SS $\phi 25\sim 40$ PSF BORE $\phi 50\sim 80$

扳手请另购。 The wrenches are sold separately from the cutters.

## Cutting Conditions

### 加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材料 Best

○第二推荐材料 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
CK010	NM	有 Wet				◎		
XC3030	GL GM	无 Dry	◎		○			
		有 Wet	◎	○	○			
XP3035	GL GM	无 Dry	◎	○	○			
		有 Wet	◎	○	○			○
XP2040	GL GM	无 Dry	○	○				○
		有 Wet	○	◎			○	
XC1015	GR	无 Dry			◎			
XC5040	GL	有 Wet		○				◎

NM: 铝合金用 GL: 轻切削用 GM: 中切削用 GR: 重切削用  
NM: Aluminum Alloy GL: Light Cutting GM: Middle Cutting GR: Heavy Cutting

### 切削条件基准表 Cutting Conditions

	加工材料 Work Material	抗拉强度·硬度 Tensile Strength·Hardness	切削速度 $V_c$ (m/min) Cutting Speed	每刃进给量 $f_z$ (mm/t) Feed per Tooth	切削深度 $a_p$ (mm) Depth of Cut
P	软钢、低碳素钢 Mild Steel, Carbon Steel (SS400, S10C)	~180HB	180 ( 100 ~ 250)	0.12 ( 0.05 ~ 0.2)	3
	碳素钢、合金钢 Carbon Steel, Alloy Steel (S50C, SCM440)	~280HB	180 ( 100 ~ 250)	0.12 ( 0.05 ~ 0.2)	3
	模具钢 Die Steel (SKD11, SKD61)	~280HB	150 ( 80 ~ 200)	0.1 ( 0.05 ~ 0.18)	3
M	不锈钢(干式) Stainless Steel (Dry) (SUS304, SUS420)	~250HB	150 ( 80 ~ 200)	0.1 ( 0.05 ~ 0.18)	2
	不锈钢(湿式) Stainless Steel (Wet) (SUS304, SUS420)	~250HB	80 ( 60 ~ 120)	0.1 ( 0.05 ~ 0.18)	2
K	铸铁 Cast Iron (FC250)	~350N/mm <sup>2</sup>	180 ( 100 ~ 350)	0.12 ( 0.05 ~ 0.2)	3
	球墨铸铁 Ductile Cast Iron (FCD400)	~800N/mm <sup>2</sup>	180 ( 100 ~ 270)	0.12 ( 0.05 ~ 0.2)	3
N	铝合金 Aluminum Alloy	~13%Si	300 ( 200 ~ 1,500)	0.15 ( 0.1 ~ 0.25)	3
S	超耐热合金(湿式) Superalloy (Wet) (Inconel 718)	-	35 ( 25 ~ 60)	0.1 ( 0.05 ~ 0.15)	1.5
	钛合金(湿式) Titanium Alloy (Wet) (Ti-6Al-4V)	-	40 ( 30 ~ 120)	0.1 ( 0.05 ~ 0.18)	1.5
H	预硬钢 Pre-hardened Steel (NAK80)	40~43HRC	90 ( 40 ~ 150)	0.1 ( 0.08 ~ 0.2)	1.5
	铸件用钢 Steel for Die Casting (DAC-MAGIC, DH31)	43~48HRC	70 ( 40 ~ 120)	0.08 ( 0.06 ~ 0.15)	0.5
	调质钢 Hardened Steel (SKD11)	50~55HRC	50 ( 40 ~ 90)	0.06 ( 0.05 ~ 0.1)	0.5

·上述数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。


The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.

# Cutting Data

## 加工数据 Cutting Data

### 耐腐蚀装置(双相不锈钢)加工 Anticorrosion equipment (duplex stainless steel) milling

使用工具 Tool	PSF09R025SS25-3S ( $\phi 25 \times 3$ 刀)	其他公司 Competitor
使用刀片(材质) Insert (grade)	SDKT09T308SR-GL (XC5040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	双相不锈钢 Duplex Stainless Steel	
切削速度 Cutting Speed	80m/min (800min <sup>-1</sup> )	
进给速度 Feed	300mm/min (0.1mm/t)	
切削深度 Depth of Cut	ap=2mm ae=15mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	立式加工中心 (BT50) Vertical Machining Center	

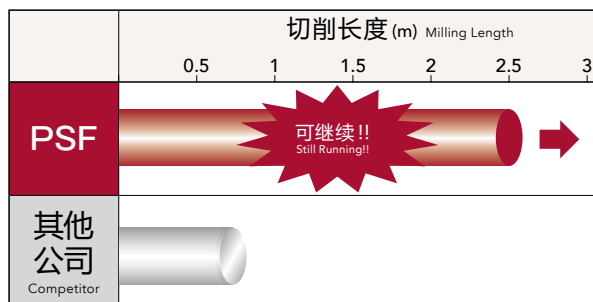


其他公司过早发生崩刃, 加工非常困难。PSF (XC5040) 则可以稳定长寿命的加工。

The competitor's product became chipped early on, making it difficult to mill. However, the PSF (XC5040) could mill in a stable manner, resulting in a long tool life.

### 半导体装置零件(SUS304)加工 Semi-conductor equipment parts (SUS304) milling

使用工具 Tool	PSF09R050M22-6 ( $\phi 50 \times 6$ 刀)	其他公司 Competitor
使用刀片(材质) Insert (grade)	SDKT09T308SR-GL (XP2040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SUS304	
切削速度 Cutting Speed	160m/min (1,000min <sup>-1</sup> )	
进给速度 Feed	1,200mm/min (0.2mm/t)	
切削深度 Depth of Cut	ap=2mm ae=30mm	
切削油剂 Coolant	气冷式 Air Blow	
使用机械 Machine	立式加工中心 (BT50) Vertical Machining Center	

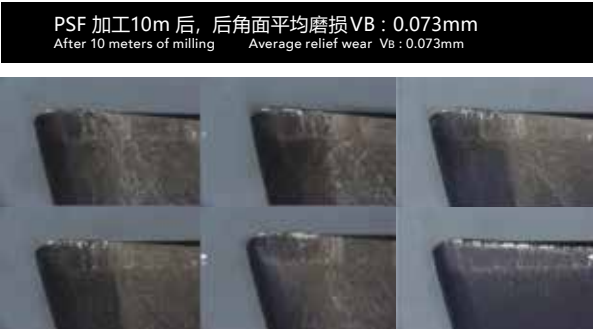


加工10m 时, 其他公司刀具发生崩损不能继续加工。PSF 因为正常磨损(小)可以继续加工, 与其他产品相比寿命提高50% 以上。

After milling 10 meters, the competitor's product became chipped, without being able to continue milling. The PSF exhibited normal (slight) wear, was able to continue milling, with durability increased by 50%.

### 优良的加工面粗糙度 Superior milling surface roughness


使用工具 Tool	PSF09R050M22-6 ( $\phi 50 \times 6$ 刀)
使用刀片(材质) Insert (grade)	SDKT09T308SR-GL (XP2040)
加工材料 Work Material	SUS304
切削速度 Cutting Speed	150m/min (955min <sup>-1</sup> )
进给速度 Feed	570mm/min (0.1mm/t)
切削深度 Depth of Cut	ap=0.2mm ae=32mm
切削油剂 Coolant	水溶性切削油剂 Water-Soluble
使用机械 Machine	卧式加工中心 (BT50) Horizontal Machining Center

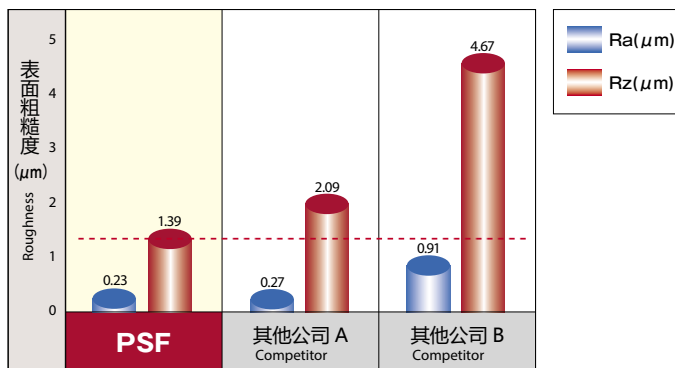

# » Phoenix PSFL

四角刀片玉米铣刀系列  
4-Corner Roughing End Mill Series

Phoenix Shoulder Long Edge End Mill

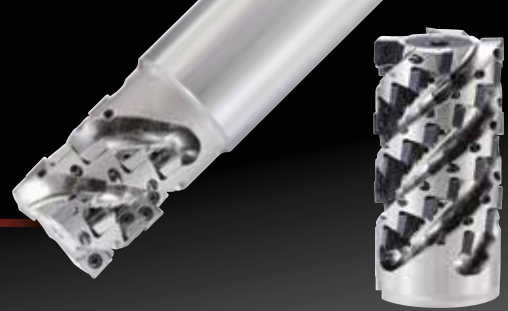

## ■ 特殊的刀体设计达到高防振效果

Special body design prevents vibration




PAT.P

### ·不等导程的刀片排列 Unequal lead alignment

第1、2段 First and second rows


第2、3段 Second and third rows

第3、4段 Third and fourth rows

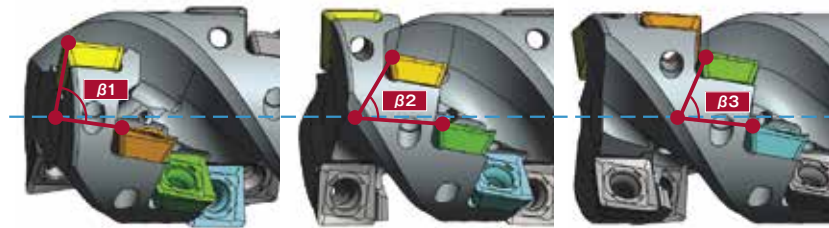

$$\beta_1 \neq \beta_2 \neq \beta_3$$


### ·不等分割 Unequal spacing teeth

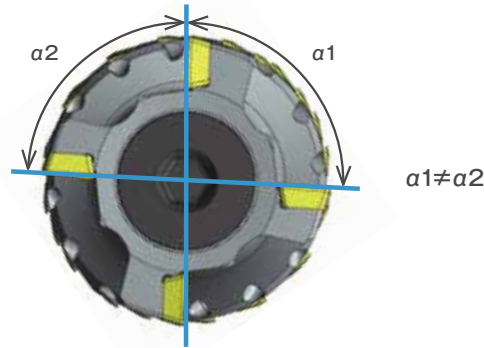

$$\alpha_1 \neq \alpha_2$$

### ·特殊刀体的防振效果可以抑制振动

The anti-vibration feature of the special body design enables the suppression of chattering

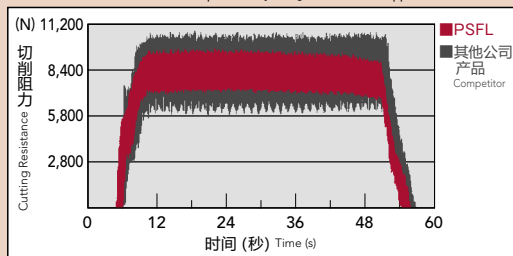

工具: PSFL09R050M27-4-7 $\phi$ ( $\phi$ 50x4刃) 加工材料: Ti-6Al-4V  
Tool Flutes Work Material

切削条件 Cutting Conditions  
Vc=60m/min (n=382min<sup>-1</sup>) Vf=230mm/min (fz=0.15mm/t)  
ap=78mm ae=10mm 水溶性切削油剂(内部给油)  
Water-Soluble (Internal)

使用机械: 卧式加工中心(BT50)  
Machine Horizontal Machining Center

### ·抑制振动时, 可以实现1.5倍的加工效率

High productivity milling with 1.5 times efficiency



工具: PSFL12R063M27-4-10 $\phi$ ( $\phi$ 63x4刃) 加工材料: FC300  
Tool Flutes Work Material

切削条件 Cutting Conditions  
Vc (PSFL) =180m/min (n=910min<sup>-1</sup>) Vf (PSFL) =910mm/min (fz=0.25mm/t)  
Vc (其他公司)=150m/min (n=758min<sup>-1</sup>) Vf (其他公司)=606mm/min (fz=0.2mm/t)  
Competitor Competitor

ap=60mm ae=7mm 气冷  
Air Blow  
使用机械: 卧式加工中心(BT50)  
Machine Horizontal Machining Center

## 经济且高耐久性的四角刀片 Economical high durability 4-corner insert


### 三维断屑槽刀片的锋利性和较大的正前角降低切削阻力

The 3-dimensional breaker insert's sharp cutting edge and large positive rake angle reduce cutting resistance




### 通用刀片 Interchangeable

09尺寸与PSF使用相同刀片，管理简单  
Enables to simplify tool management, as inserts for PSFL are interchangeable with those for PSF09.

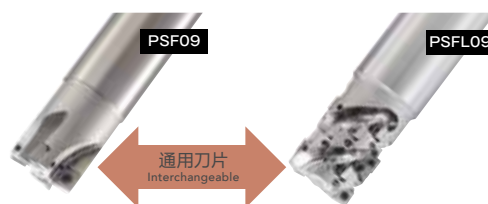

### PSFL(4角) 与其他公司产品(2角) 的可加工工件数比较 Comparison of processed workpieces of PSFL (4-corner) versus competitor product (2-corner)

使用工具 Tool	PSFL12R080M32-5-110 ( $\phi 80 \times 5$ 刃) Flutes	其他公司粗加工铣刀 Competitor's Roughing Cutter ( $\phi 80 \times 5$ 刃) Flutes
使用刀片(材质) Insert (grade)	SDKT120508SR-GM (XP3035)	硬质合金涂层刀片 (2圆弧角式样) Coated Carbide Insert (2-corner Type)
加工材料 Work Material	SS400	
切削速度 Cutting Speed	180m/min(720min <sup>-1</sup> )	
进给速度 Feed	400mm/min(0.11mm/t)	
切削深度 Depth of Cut	ap=85mm ae=10mm	
切削油剂 Coolant	水溶性切削油剂(内部给油) Water-Soluble (Internal)	
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center	

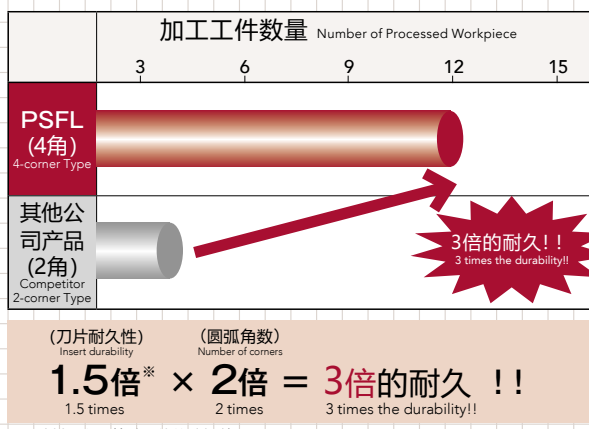


\*刀片材质以及特殊刀体的防振效果  
Due to grade of insert and anti-vibration feature of the special body design.

### 可以对应从一般钢到难加工材料广泛的加工材料 Insert variations to accommodate a wide range of work materials - from general steel to difficult-to-machine materials

断屑槽 Insert Breaker	NM	GL	GM	GR
用途 Application	铝合金·非铁合金加工 Aluminum alloy & Non-ferrous metal	低阻力加工 耐热合金·难加工材料 Low-resistance machining-Heat-resistant alloy & Difficult-to-machine material	通用加工 一般钢加工 Multi-purpose machining & General steel milling	断续加工 铸铁加工 Intermittent machining & Cast iron machining

# Phoenix Specification


形状尺寸表 Specification

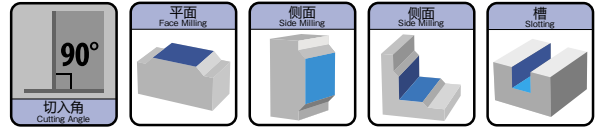

## 四角刀片玉米铣刀 直柄型

4-Corner Roughing End Mill Straight Shank Type

### PSFL SS

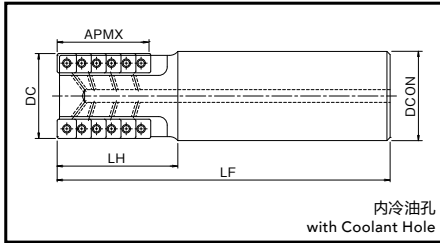

单位:mm Unit:mm


商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEFP	每刃刀片数 No. of Insert per Flute	总刀片数 Total No. of Inserts	刃长 APMX	柄径 DCON	全长 LF	颈长 LH	重量 (kg)	适用刀片 Applicable Inserts	库存 Stock
7803700	PSFL09R032SS32-2-36	32	2	5	10	36	32	140	60	0.71	①	○
7803701	PSFL09R040SS42-3-43	40	3	6	18	43	42	140	60	1.17		

C=标准库存品 C=Standard stock item

## 四角刀片玉米铣刀 刀盘型

4-Corner Roughing End Mill Bore Type

### PSFL BORE

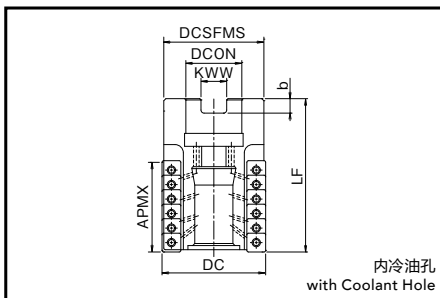


单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEFP	每刃刀片数 No. of Insert per Flute	总刀片数 Total No. of Inserts	刃长 APMX	刀具高度 LF	刀盘径 DCSFMS	孔径 DCON	端面键槽 Key Slot		重量 (kg)	适用刀片 Applicable Inserts	库存 Stock
										宽度 KWW	深度 b			
7803702	PSFL09R050M22-4-50	50	4	7	28	50	75	48.5	22	10.4	6.3	0.53	①	○
7803703	PSFL09R050M22-4-78	50	4	11	44	78	100	48.5	22	10.4	6.3	0.71		
7803704	PSFL09R050M27-4-50	50	4	7	28	50	75	48.5	27	12.4	7	0.53		
7803705	PSFL09R050M27-4-78	50	4	11	44	78	100	48.5	27	12.4	7	0.71		
7803706	PSFL12R063M27-4-60	63	4	6	24	60	85	60.5	27	12.4	7	0.88	②	
7803707	PSFL12R063M27-4-100	63	4	10	40	100	125	60.5	27	12.4	7	1.26		
7803708	PSFL12R080M32-5-70	80	5	7	35	70	95	77.3	32	14.4	8	1.88	②	
7803709	PSFL12R080M32-5-110	80	5	11	55	110	143	77.3	32	14.4	8	2.96		
7803710	PSFL12R100M32-6-120	100	6	12	72	120	153	97	32	16.4	9	4.95		

○=标准库存品 ○=Standard stock item  
※=受注对应品 ※=Special order item

# Inserts

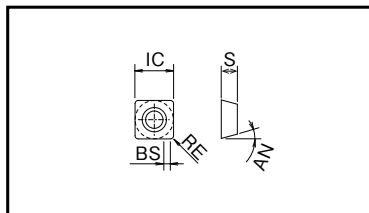

## ■ 适用刀片 Inserts



单位:mm Unit:mm

商品号 Designation	切削刀数 No. of Cutting Edges	刀片尺寸 Insert Size					副切削刃 BS	涂层种类 Grade of Coated Materials				
		IC	厚度 S	后角 AN	RE	硬质合金 Uncoated		CK010	XC3030	XP3035	XP2040	XC1015
① SDHT09T308FR-NM	4	9.07	3.97	15°	0.8	2.5	7811076					
	4	9.07	3.97	15°	0.8	2.5		7825073	7814073	7813073		
	4	9.07	3.97	15°	0.8	2.5						7816073
	4	9.07	3.97	15°	0.8	2.5					7812075	
② SDHT120508FR-NM	4	12.38	5	15°	0.8	1.2	7811625					
	4	12.38	5	15°	0.8	1.2				7813623		
	4	12.38	5	15°	0.8	1.2						7816620
	4	12.38	5	15°	0.8	1.2		7825622	7814621			
4	12.38	5	15°	0.8	1.2					7812624		

库存种类都为C(即标准库存品) Stock are categorized as C (standard stock item).

# Accessories

## ■ 零件 Accessories

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts	适用刀具 Applicable Cutters
 固定螺丝 Clamping Screw	7808110	FS30573 (Torx 8)	① SD*T09...	PSFL SS $\phi$ 32, $\phi$ 40 PSFL BORE $\phi$ 50
	7808129	FS40511 (Torx 15)	② SD*T12...	PSFL BORE $\phi$ 63~100
 止冷却螺钉 Coolant cap bolt	7808132	OCB-M20-08		PSFL BORE $\phi$ 50
	7808133	OCB-M24-10		PSFL BORE $\phi$ 63
	7808134	OCB-M30-14		PSFL BORE $\phi$ 80, $\phi$ 100

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts	适用刀具 Applicable Cutters
 扳手 Wrench	7808205	T8-D (Torx 8)	① SD*T09...	PSFL SS $\phi$ 32, $\phi$ 40 PSFL BORE $\phi$ 50
	7808208	T15-D (Torx 15)	② SD*T12...	PSFL BORE $\phi$ 63~100

库存种类都为C(即标准库存品) Stock are categorized as C (standard stock item).  
扳手请另购。 The wrenches are sold separately from the cutters.

# Phoenix

四角刀片玉米铣刀  
4-Corner Roughing End Mill

## PSFL

### 加工材料推荐 Recommended Materials by Insert Type

◎第一推荐材料 Best  
○第二推荐材料 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H	刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
CK010	NM	有 Wet				◎			XP2040	GL GM	无 Dry 有 Wet	○ ◎	○ ◎				○
XC3030	GL GM	无 Dry	◎		○				XC1015	GR	无 Dry			◎			
XP3035	GL GM	无 Dry	◎	○	○				XC5040	GL	有 Wet		○			◎	
		有 Wet															

NM: 铝合金用 GL: 轻切削用 GM: 中切削用 GR: 重切削用  
NM: Aluminum Alloy GL: Light Cutting GM: Middle Cutting GR: Heavy Cutting

切削深度(ap) 1.1 ~ 1.5D、  
切削宽度0.1D 以下时的参数表。  
The chart below is based on the following condition:  
-Depth of Cut (ap): between 1.1D to 1.5D  
-Cutting Width (ae) ≤ 0.1D

# Cutting Conditions

### 切削条件基准表 Cutting Conditions

加工材料 Work Material	抗拉强度·硬度 成分等 Tensile Strength · Hardness	刀片尺寸 Insert Size			
		SD*T09...		SD*T12...	
		切削速度 Vc (m/min) Cutting Speed	每刃进给量 fz (mm/t) Feed Per Tooth	切削速度 Vc (m/min) Cutting Speed	每刃进给量 fz (mm/t) Feed Per Tooth
P 软钢, 低碳素钢 Mild Steel, Carbon Steel (SS400, S10C) 碳素钢, 合金钢 Carbon Steel, Alloy Steel (S50C, SCM440) 模具钢 Die Steel (SKD11, SKD61)	~180HB	160 (100 ~ 200)	0.25 (0.2 ~ 0.4)	160 (100 ~ 200)	0.3 (0.2 ~ 0.4)
	~280HB	150 (100 ~ 200)	0.2 (0.15 ~ 0.3)	150 (100 ~ 200)	0.25 (0.15 ~ 0.3)
	~280HB	130 (80 ~ 180)	0.2 (0.15 ~ 0.3)	130 (80 ~ 180)	0.25 (0.15 ~ 0.3)
M 不锈钢(干式) Stainless Steel (Dry) (SUS304, SUS420) 不锈钢(湿式) Stainless Steel (Wet) (SUS304, SUS420)	~250HB	150 (100 ~ 200)	0.12 (0.1 ~ 0.3)	150 (100 ~ 200)	0.15 (0.1 ~ 0.3)
	~250HB	80 (60 ~ 120)	0.12 (0.1 ~ 0.3)	80 (60 ~ 120)	0.15 (0.1 ~ 0.3)
K 铸铁 Cast Iron (FC250) 球墨铸铁 Ductile Cast Iron (FCD400)	~350N/mm <sup>2</sup>	160 (100 ~ 300)	0.2 (0.15 ~ 0.35)	160 (100 ~ 300)	0.25 (0.2 ~ 0.4)
	~800N/mm <sup>2</sup>	160 (100 ~ 250)	0.2 (0.15 ~ 0.3)	160 (100 ~ 250)	0.2 (0.15 ~ 0.35)
N 铝合金 Aluminum Alloy	~13%Si	300 (200 ~ 1,000)	0.25 (0.1 ~ 0.4)	300 (200 ~ 1,000)	0.3 (0.1 ~ 0.4)
S 超耐热合金(湿式) Superalloy (Wet) (Inconel 718) 钛合金(湿式) Titanium Alloy (Wet) (Ti-6Al-4V)	-	35 (25 ~ 60)	0.15 (0.08 ~ 0.3)	35 (25 ~ 60)	0.18 (0.1 ~ 0.3)
	-	40 (30 ~ 120)	0.15 (0.08 ~ 0.3)	40 (30 ~ 120)	0.18 (0.1 ~ 0.3)
H 预硬钢 Pre-hardened Steel (NAK80) 铸件用钢 Steel for Die Casting (DAC-MAGIC, DH31)	40~43HRC	100 (40 ~ 150)	0.15 (0.08 ~ 0.3)	100 (40 ~ 150)	0.18 (0.1 ~ 0.3)
	43~48HRC	60 (40 ~ 120)	0.12 (0.05 ~ 0.2)	60 (40 ~ 120)	0.15 (0.05 ~ 0.2)

· 上述数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。  
The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.

### 切削深度变更时的参数变更的参考值 Ratio of cutting condition by cutting depth to the above standard condition

切削深度 Depth of Cut ap (mm)	最大切入端面槽宽度 Maximum width of Cut ae (mm)	切削速度系数 Ratio to adjust cutting speed VP	进给系数 Ratio to adjust feed rate fP
~ 0.2D	1D	0.8	0.5
0.2 ~ 0.3D	0.7D	0.8	0.6
0.4 ~ 0.5D	0.5D	0.9	0.7
0.6 ~ 0.7D	0.3D	0.9	0.8
0.8 ~ 1D	0.2D	1	0.9
1.1 ~ 1.5D	0.1D	1	1



例 Example  
刀片尺寸 SD\*T09...、侧面切削  
φ50、ap=50mm、S50C 切削时  
Insert size SD\*T09...; for cutting φ50, ap=50, side milling,  
for carbon steel (S50C) machining  
· 150m/min(Vc) × 1.0(VP) = 150m/min  
· 0.2mm/t(fz) × 0.9(fP) = 0.18mm/t  
· ae: 0.2 × φ50 = 10mm 以下  
or less

# Cutting Data

加工数据

## 铸件板的侧面高效加工 High productivity side milling of cast plate

使用工具 Tool	PSFL12R063M27-4-100(φ63×4刃) Flutes	其他公司高进给圆弧角铣刀(φ50×3刃) Competitor's High Feed Radius Cutter Flutes
使用刀片(材质) Insert (grade)	SDKT120508SR-GR (XC1015)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	FC300	
切削速度 Cutting Speed	120m/min(606min <sup>-1</sup> )	110m/min(700min <sup>-1</sup> )
进给速度 Feed	500mm/min(0.2mm/t)	2,800mm/min(0.133mm/t)
切削深度 Depth of Cut	ap=50mm ae=10mm	ap=2mm ae=10mm
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	龙门加工中心(BT50) Double Column Machining Center	

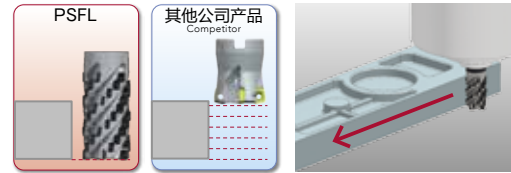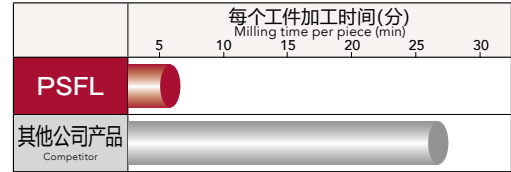


由于以往不稳定的工件夹具容易产生振动,使用高进给圆弧角铣刀时,不得不采用低切深(ap)进行加工。采用不等导程·不等分割的PSFL,即使ap=50mm也可以进行无振加工。相对于以往的高进给圆弧角铣刀,可以大幅度降低加工时间。

Conventionally, in order to suppress chatter vibrations caused by an unstable work clamp, the high feed radius cutter is used with a smaller ap. With the PSFL's unequal spacing and variable lead design, stable milling with no chattering can be achieved even at ap=50mm.

## 钛合金的次摆线加工 Trochoid milling in titanium alloy

使用工具 Tool	PSFL09R050M22-4-50(φ50×4刃) Flutes	其他公司粗加工铣刀(φ50×4刃) Competitor's Roughing Cutter Flutes
使用刀片(材质) Insert (grade)	SDKT09T308SR-GL (XC5040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	Ti-6Al-4V	
切削速度 Cutting Speed	60m/min(382min <sup>-1</sup> )	
进给速度 Feed	152mm/min(0.1mm/t)	
切削深度 Depth of Cut	ap=50mm ae=10mm	
切削油剂 Coolant	水溶性切削油剂(内部给油) Water-Soluble (Internal)	
使用机械 Machine	立式加工中心(BT50) Vertical Machining Center	

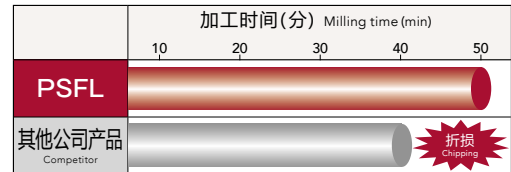


其他公司产品加工到40分钟时就发生崩刃,PSFL在加工50分钟后没有发生崩刃,仅有轻微磨损,且可继续加工。

The competitor tool encountered chipping after milling for 40 minutes. The PSFL, on the other hand, had no chipping, normal wear, and can continue to be used even after 50 minutes of machining.

## FC250的长寿命加工 Long tool life in FC250

使用工具 Tool	PSFL12R063M27-4-100 (φ63×4刃) Flutes	其他公司A粗加工铣刀 Competitor's Roughing Cutter (φ63×4刃) Flutes	其他公司B粗加工铣刀 Competitor's Roughing Cutter (φ63×4刃) Flutes
使用刀片(材质) Insert (grade)	SDKT120508SR-GR (XC1015)	硬质合金涂层刀片 Coated Carbide Insert	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	FC250		
切削速度 Cutting Speed	100m/min(505min <sup>-1</sup> )		
进给速度 Feed	505mm/min(0.25mm/t)		
切削深度 Depth of Cut	ap=100mm ae=10mm		
切削油剂 Coolant	无(气冷式) Air Blow		
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center		

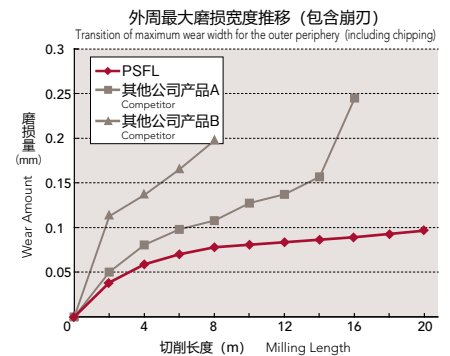

其他公司产品在加工时由于振动过大导致过早崩刃,PSFL出色的防振效果在加工中可以有效抑制振动,实现无崩刃的长寿命加工。


Large chatter occurred during processing with the competitor tool, which led to early chipping. On the other hand, the PSFL's anti-vibration feature allows it to suppress chatter significantly, which led to minimized chipping and long tool life.

Phoenix  
PXD  
PD  
PHP  
PZAG  
PAS  
PAO  
PSF  
PSFL  
PSE  
PSEL  
PSTW  
PHC  
PRC  
PDR  
PFAL  
PFB  
PFR  
SF  
PXM  
PXM  
Clamping Screw · Body Dimensions  
紧固螺栓 · 安装方法  
Index  
索引

# Phoenix PSE


方肩铣刀系列  
Shoulder Cutter Series

Phoenix Shoulder End mill

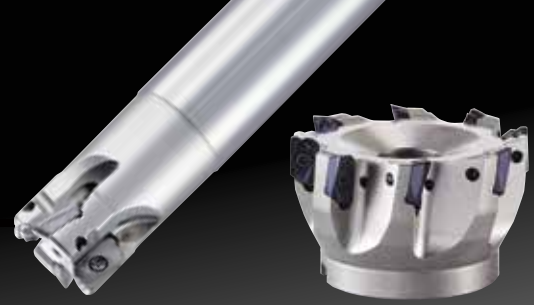

## 底部槽口的效果 Bottom notch


- 由于底部槽口，斜线加工或螺旋线加工时可将切屑分成两段。  
The bottom notch breaks chips into 2 pieces when processing ramping and helical milling.
- 能抑制切屑堵塞·卷曲缠绕，可顺畅地进行加工。  
Preventing chip jamming or wrapping and enabling smooth process.
- 槽口适用于 PSE11 R1.6 以下、PSE15 R2.5 以下。  
The bottom notch is available in PSE11 R1.6 or less, and PSE15 R2.5 or less.

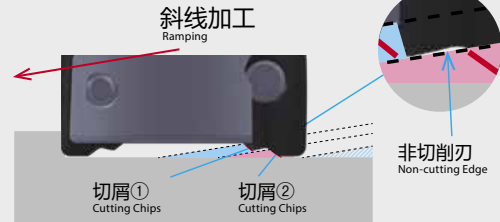

## 高精度刀片 High precision insert


### — 底面粗糙度 — Bottom roughness

工具: PSE11R032SS32-5S (ZDKT11T304SR-GM XP3035) 加工材料: S50C  
Tool Work Material  
切削条件:  $V_c=180\text{m/min}$   $f_z=0.1\text{mm/t}$   $a_p=0.1\text{mm}$   $a_e=25.6\text{mm}$   
Cutting Conditions  
结果:  $R_a: 0.5\mu\text{m}$  以下  $R_z: 4\mu\text{m}$  底面粗糙度可控制在  $4\mu\text{m}$  以下。  
Result: PSE showed an improvement at the bottom flat surface finish  $R_z 4\mu\text{m}$  and under.

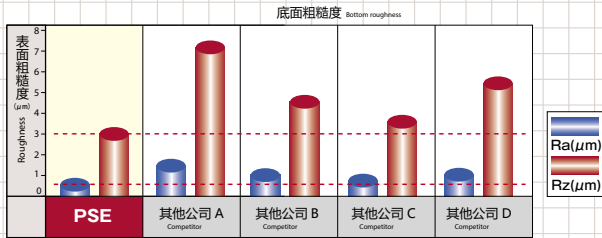

### — 侧面加工高低差异 — Side Milling Offset


工具: PSE15R032SS32-3S (ZDKT150508SR-GM XP3035) 加工材料: S50C  
Tool Work Material  
切削条件:  $V_c=180\text{m/min}$   $f_z=0.1\text{mm/t}$   $a_p=5\text{mm}$   $a_e=0.2\text{mm}$   
Cutting Conditions  
结果: 高低差距  $10\mu\text{m}$  (实际值) 及侧面加工高低差异上可发挥其性能。  
Result: Showed improvement at side step machining as (measured) step as  $10\mu\text{m}$

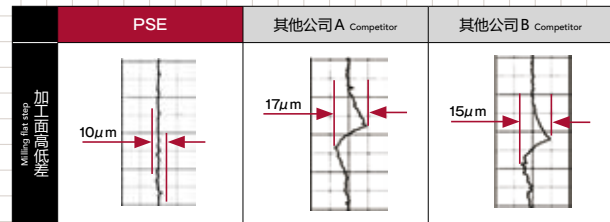

## 丰富的种类 Wide variety of inserts



断屑槽 Insert Breaker	NM	GL	SM	GM	GR	HR
用途 Application	铝合金·非铁金属加工 Aluminum alloy & Non-ferrous metal	低阻力加工 Low-resistance machining	耐热合金·难削材加工 Superalloy & Difficult-to-machine material	通用加工 Multi-purpose machining	断续加工·长悬长加工 Interrupted machining & Long overhang machining	高硬度材加工 High-hardened material

方肩铣刀 直柄型  
Shoulder Cutter with Straight Shank  
**PSE SS**



## Specification

形状尺寸表 Specification

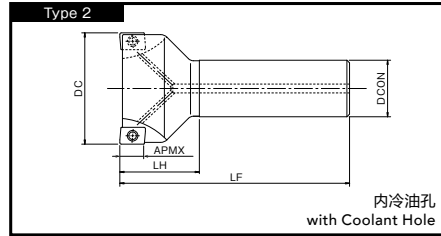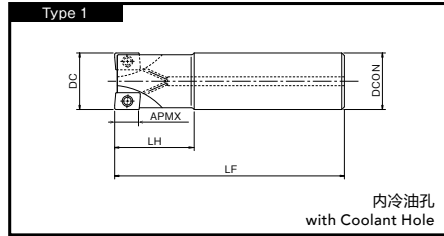

单位:mm Unit:mm


商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEPF	柄径 DCON	全长 LF	颈长 LH	APMX	重量 (kg)	适用刀片 Applicable Inserts	形状类型 Type
7801100	PSE11R016SS16-2S	16	2	16	90	25	10	0.12		1
7801121	PSE11R016SS16-2L	16	2	16	150	50	10	0.21		1
7801139	PSE11R017SS16-2L	★ 17	2	16	150	25	10	0.22		2
7801116	PSE11R018SS16-2S	★ 18	2	16	90	25	10	0.13		2
7801122	PSE11R018SS16-2L	★ 18	2	16	150	25	10	0.21		2
7801101	PSE11R020SS20-2S	20	2	20	100	30	10	0.21		1
7801115	PSE11R020SS20-3S	20	3	20	100	30	10	0.21		1
7801123	PSE11R020SS20-3L	20	3	20	160	60	10	0.34		1
7801140	PSE11R021SS20-3L	★ 21	3	20	160	30	10	0.35		2
7801117	PSE11R022SS20-3S	★ 22	3	20	110	30	10	0.24		2
7801124	PSE11R022SS20-3L	★ 22	3	20	160	30	10	0.35		2
7801102	PSE11R025SS25-3S	25	3	25	120	35	10	0.40		1
7801125	PSE11R025SS25-3L	25	3	25	170	70	10	0.57	①	1
7801104	PSE11R025SS25-4S	25	4	25	120	35	10	0.40		1
7801141	PSE11R026SS25-3L	★ 26	3	25	170	35	10	0.59		2
7801126	PSE11R028SS25-3L	★ 28	3	25	170	35	10	0.59		2
7801118	PSE11R028SS25-4S	★ 28	4	25	120	35	10	0.42		2
7801127	PSE11R030SS32-3L	30	3	32	190	90	10	1.01		1
7801119	PSE11R030SS32-4S	30	4	32	130	45	10	0.69		1
7801103	PSE11R032SS32-3S	32	3	32	130	45	10	0.73		1
7801128	PSE11R032SS32-3L	32	3	32	190	90	10	1.08		1
7801105	PSE11R032SS32-5S	32	5	32	125	40	10	0.70		1
7801142	PSE11R033SS32-3L	★ 33	3	32	190	35	10	1.09		2
7801129	PSE11R035SS32-3L	★ 35	3	32	190	35	10	1.11		2
7801120	PSE11R035SS32-5S	★ 35	5	32	130	35	10	0.75		2

★粗刃型 详细请参阅 p.89.  
Reduced Shank Type See p.89 for details.

**NEXT**



# Phoenix

## 方肩铣刀 直柄型 Shoulder Cutter with Straight Shank PSE SS

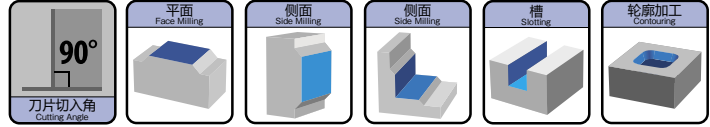

# Specification

### 形状尺寸表 Specification

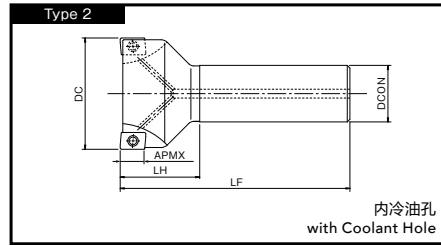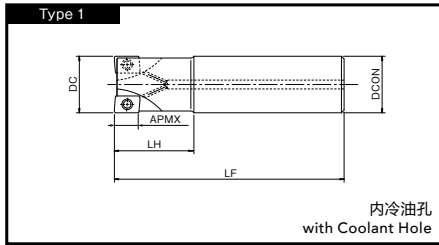

单位:mm Unit:mm

### FROM


商品号 EDP No.	名称 Designation	外径 DC	刃数 Z/FP	柄径 DCON	全长 LF	颈长 LH	APMX	重量 (kg)	适用刀片 Applicable Inserts	形状类型 Type
7801106	PSE15R025SS25-2S	25	2	25	120	35	14	0.38	②	1
7801133	PSE15R025SS25-2L	25	2	25	170	70	14	0.55		1
7801143	PSE15R026SS25-2L	★ 26	2	25	170	35	14	0.57		2
7801130	PSE15R028SS25-2S	★ 28	2	25	120	35	14	0.40		2
7801134	PSE15R028SS25-2L	★ 28	2	25	170	35	14	0.58		2
7801131	PSE15R030SS32-3S	30	3	32	130	45	14	0.67		1
7801135	PSE15R030SS32-3L	30	3	32	190	90	14	0.98		1
7801107	PSE15R032SS32-2S	32	2	32	130	45	14	0.70		1
7801111	PSE15R032SS32-3S	32	3	32	130	45	14	0.69		1
7801136	PSE15R032SS32-3L	32	3	32	190	90	14	1.04		1
7801144	PSE15R033SS32-3L	★ 33	3	32	190	45	14	1.07		2
7801132	PSE15R035SS32-3S	★ 35	3	32	130	35	14	0.72		2
7801137	PSE15R035SS32-3L	★ 35	3	32	190	45	14	1.08		2
7801108	PSE15R040SS32-3S	40	3	32	140	50	14	0.82		2
7801138	PSE15R040SS32-3L	40	3	32	190	45	14	1.11		2
7801112	PSE15R040SS32-4S	40	4	32	140	50	14	0.83		2
7801109	PSE15R050SS32-3S	50	3	32	130	45	14	0.88		2
7801113	PSE15R050SS32-5S	50	5	32	130	45	14	0.87		2
7801110	PSE15R063SS32-4S	63	4	32	130	45	14	1.04		2
7801114	PSE15R063SS32-6S	63	6	32	130	45	14	1.04		2

★粗刃型 详细请参阅 p.89.  
Reduced Shank Type See p.89 for details.

# Phoenix




方肩铣刀 刀盘型  
Shoulder Cutter with Bore Type

## PSE BORE



# Specification

形状尺寸表 Specification

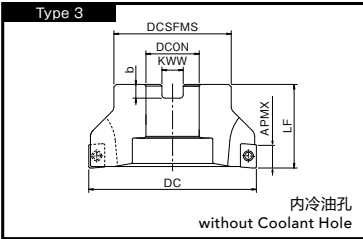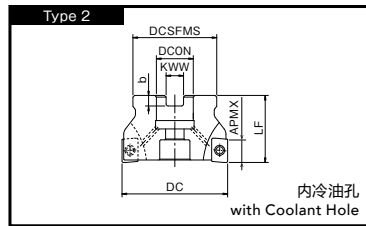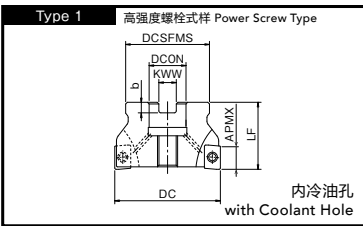

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEFP	刀具高度 LF	刀盘径 DCSFMS	孔径 DCON	端面键槽 Key Slot		APMX	重量 (kg)	适用刀片 Applicable Inserts	形状类型 Type
							宽度 KWW	深度 b				
7801000	PSE11R040M16-4	40	4	40	38	16	8.4	5.6	10	0.21	①	1
7801004	PSE11R040M16-6	40	6	40	38	16	8.4	5.6	10	0.22		1
7801001	PSE11R050M22-5	50	5	40	45	22	10.4	6.3	10	0.30		1
7801005	PSE11R050M22-7	50	7	40	45	22	10.4	6.3	10	0.33		1
7801002	PSE11R063M22-6	63	6	40	50	22	10.4	6.3	10	0.50		2
7801006	PSE11R063M22-8	63	8	40	50	22	10.4	6.3	10	1.07		2
7801020	PSE11R080M25.4-7	80	7	50	60	25.4	9.5	6	10	1.05		2
7801003	PSE11R080M27-7	80	7	50	60	27	12.4	7	10	1.04		2
7801021	PSE11R080M25.4-10	80	10	50	60	25.4	9.5	6	10	1.04		2
7801007	PSE11R080M27-10	80	10	50	60	27	12.4	7	10	1.03		2
7801008	PSE15R040M16-3	40	3	40	38	16	8.4	5.6	14	0.19	②	1
7801014	PSE15R040M16-4	40	4	40	38	16	8.4	5.6	14	0.19		1
7801009	PSE15R050M22-3	50	3	40	45	22	10.4	6.3	14	0.30		1
7801015	PSE15R050M22-5	50	5	40	45	22	10.4	6.3	14	0.28		1
7801010	PSE15R063M22-4	63	4	40	50	22	10.4	6.3	14	0.47		2
7801016	PSE15R063M22-6	63	6	40	50	22	10.4	6.3	14	0.46		2
7801022	PSE15R080M25.4-5	80	5	50	60	25.4	9.5	6	14	1.00		2
7801011	PSE15R080M27-5	80	5	50	60	27	12.4	7	14	0.99		2
7801025	PSE15R080M25.4-8	80	8	50	60	25.4	9.5	6	14	1.01		2
7801017	PSE15R080M27-8	80	8	50	60	27	12.4	7	14	1.00		2
7801023	PSE15R100M31.7-7	100	7	50	70	31.75	12.7	8	14	1.45		3
7801012	PSE15R100M32-7	100	7	50	70	32	14.4	8	14	1.58		2
7801026	PSE15R100M31.7-10	100	10	50	70	31.75	12.7	8	14	1.50		3
7801018	PSE15R100M32-10	100	10	50	70	32	14.4	8	14	1.63		2
7801024	PSE15R125M38.1-8	125	8	63	90	38.1	15.9	10	14	3.13		3
7801027	PSE15R125M38.1-11	125	11	63	90	38.1	15.9	10	14	3.15		3

库存种类都为○(即标准库存品) Stock are categorized as ○ (Standard stock item).


# Phoenix

方肩铣刀 螺纹安装型  
Shoulder Cutter with Screw Fit Type

## PSE SF

## Specification

■形状尺寸表 Specification

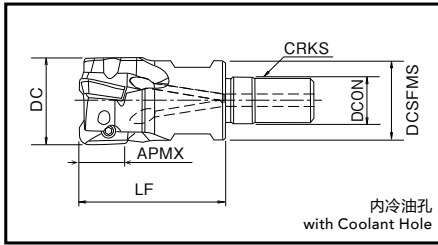

PSE 螺纹安装型 Screw Fit Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEPF	装夹直径 DCON	螺纹尺寸 CRKS	扳手尺寸 Spanner Size	全长 LF	端面直径 DCSFMS	APMX	重量 (kg)	适用刀片 Applicable Inserts
7801600	PSE11R016SF8-2	16	2	8.5	M8	10	27	14.5	10	0.03	①
7801612	PSE11R017SF8-2	★ 17	2	8.5	M8	10	27	14.5	10	0.03	
7801613	PSE11R018SF8-2	★ 18	2	8.5	M8	10	27	14.5	10	0.03	
7801601	PSE11R020SF10-3	20	3	10.5	M10	14	33	18	10	0.06	
7801614	PSE11R021SF10-3	★ 21	3	10.5	M10	14	33	18	10	0.06	
7801615	PSE11R022SF10-3	★ 22	3	10.5	M10	14	33	18	10	0.06	
7801602	PSE11R025SF12-4	25	4	12.5	M12	17	35	23	10	0.10	
7801616	PSE11R026SF12-3	★ 26	3	12.5	M12	17	35	23	10	0.10	
7801603	PSE11R028SF12-4	★ 28	4	12.5	M12	17	35	23	10	0.11	
7801604	PSE11R032SF16-5	32	5	17	M16	22	40	28	10	0.19	
7801617	PSE11R033SF16-3	★ 33	3	17	M16	22	40	28	10	0.20	
7801605	PSE11R035SF16-5	★ 35	5	17	M16	22	40	28	10	0.20	
7801606	PSE11R040SF16-6	40	6	17	M16	22	40	28	10	0.22	
7801607	PSE15R025SF12-2	25	2	12.5	M12	17	35	23	14	0.09	
7801618	PSE15R026SF12-2	★ 26	2	12.5	M12	17	35	23	14	0.10	
7801608	PSE15R028SF12-2	★ 28	2	12.5	M12	17	35	23	14	0.10	
7801609	PSE15R032SF16-3	32	3	17	M16	22	40	28	14	0.17	
7801619	PSE15R033SF16-3	★ 33	3	17	M16	22	40	28	14	0.18	
7801610	PSE15R035SF16-3	★ 35	3	17	M16	22	40	28	14	0.18	
7801611	PSE15R040SF16-4	40	4	17	M16	22	40	28	14	0.20	

刀具夹具, 刀柄请参考 P.190~192

See p.190-p.192 for shank holders.

### ★ PSE 粗刃型 Reduced Shank Type

·粗刃型的刀具外径大于柄径, 使其在模具零件等的深壁加工、型腔加工中最为适合。



·The outer diameter of the reduced shank type is larger than the shank diameter, making it highly effective in the processing of die and mold applications that require vertical wall milling or pocketing.

例  
Example



# Accessories


## ■ 零件 Accessories

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts		适用刀具 Applicable Cutters
			①	②	
 固定螺丝 Clamping Screw	7808107	FS25656P (Torx 8IP)	①	ZD*T11...	PSE SS/SF $\phi$ 16~40
	7808109	FS25673P (Torx 8IP)			PSE BORE $\phi$ 40~80
	7808115	FS35686P (Torx 15IP)	②	ZDKT15...	PSE SS/SF $\phi$ 25~63 PSE BORE $\phi$ 40~125
 高强度螺栓 Power Screw	7808150	PS0830 (M8×30)	①	ZD*T11...	PSE BORE $\phi$ 40
			②	ZDKT15...	
	7808151	PS1031 (M10×31)	①	ZD*T11...	PSE BORE $\phi$ 50
			②	ZDKT15...	

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts		适用刀具 Applicable Cutters
			①	②	
 扳手 Wrench	7808225	8IP-D (Torx 8IP)	①	ZD*T11...	PSE SS/SF $\phi$ 16~40 PSE BORE $\phi$ 40~80
	7808228	15IP-D (Torx 15IP)	②	ZDKT15...	PSE SS/SF $\phi$ 25~63 PSE BORE $\phi$ 40~125

扳手请另购。 The wrenches are sold separately from the cutters.

## Inserts

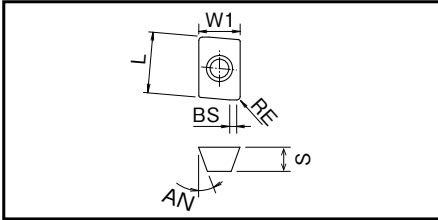


## ■ 适用刀片 Inserts

名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size					硬质合金 Uncoated	CK010
		LxW1	厚度 S	后角 AN	RE	副切削刃 BS		
ZDKT11T302FR-NM	2	11×6.8	3.8	15°	0.2	2.0	7811048	
ZDKT11T304FR-NM	2	11×6.8	3.8	15°	0.4	1.8	7811049	
ZDKT11T308FR-NM	2	11×6.8	3.8	15°	0.8	1.4	7811023	
ZDHT11T302FR-NM	2	11×6.8	3.5	15°	0.2	2.0	7811010	
ZDHT11T304FR-NM	2	11×6.8	3.5	15°	0.4	1.8	7811024	
ZDHT11T308FR-NM	2	11×6.8	3.5	15°	0.8	1.4	7811014	
ZDHT11T312FR-NM	2	11×6.8	3.5	15°	1.2	1.4	7811015	
ZDHT11T316FR-NM	2	11×6.8	3.5	15°	1.6	1.4	7811017	
ZDHT11T320FR-NM	2	11×6.8	3.5	15°	2.0	1.4	7811018	
ZDHT11T325FR-NM	2	11×6.8	3.5	15°	2.5	1.4	7811019	
ZDHT11T332FR-NM	2	11×6.8	3.5	15°	3.2	0.8	7811020	
ZDHT11T340FR-NM	2	11×6.8	3.5	15°	4.0	-	7811021	
ZDHT11T350FR-NM	2	11×6.8	3.5	15°	5.0	-	7811022	
ZDKT11T304SR-GL	2	11×6.8	3.8	15°	0.4	1.8		
ZDKT11T308SR-GL	2	11×6.8	3.8	15°	0.8	1.4		
ZDKT11T312SR-GL	2	11×6.8	3.8	15°	1.2	1.0		
ZDKT11T320SR-GL	2	11×6.8	3.8	15°	2.0	2.1		
① ZDKT11T332SR-GL	2	11×6.8	3.8	15°	3.2	1.5		
ZDKT11T304SR-GM	2	11×6.8	3.8	15°	0.4	1.8		
ZDKT11T308SR-GM	2	11×6.8	3.8	15°	0.8	1.4		
ZDKT11T312SR-GM	2	11×6.8	3.8	15°	1.2	1.0		
ZDKT11T320SR-GM	2	11×6.8	3.8	15°	2.0	2.1		
ZDKT11T325SR-GM	2	11×6.8	3.8	15°	2.5	1.6		
ZDKT11T330SR-GM	2	11×6.8	3.8	15°	3.0	1.5		
ZDKT11T340SR-GM	2	11×6.8	3.8	15°	4.0	-		
ZDKT11T308SR-GR	2	11×6.8	3.8	15°	0.8	1.4		
ZDKT11T308SR-HR	2	11×6.8	3.8	15°	0.8	1.4		
ZDKT11T304ER-SM	2	11×6.8	3.8	15°	0.4	1.8		
ZDKT11T308ER-SM	2	11×6.8	3.8	15°	0.8	1.4		
ZDKT11T312ER-SM	2	11×6.8	3.8	15°	1.2	1.1		
ZDKT11T316ER-SM	2	11×6.8	3.8	15°	1.6	0.8		
ZDKT11T320ER-SM	2	11×6.8	3.8	15°	1.2	0.3		
ZDKT11T325ER-SM	2	11×6.8	3.8	15°	2.5	-		
ZDKT11T332ER-SM	2	11×6.8	3.8	15°	3.2	-		
ZDKT11T340ER-SM	2	11×6.8	3.8	15°	4.0	-		



## Inserts

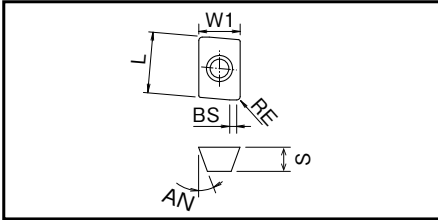


## FROM

## ■ 适用刀片 Inserts

名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size					硬质合金 Uncoated	
		L×W1	厚度 S	后角 AN	RE	副切削刃 BS	CK010	
ZDKT150508FR-NM	2	15×9.3	5.56	15°	0.8	1.6	7811046	
ZDKT150508SR-GL	2	15×9.3	5.56	15°	0.8	1.6		
ZDKT150508SR-GM	2	15×9.3	5.56	15°	0.8	1.6		
ZDKT150512SR-GM	2	15×9.3	5.56	15°	1.2	1.2		
ZDKT150516SR-GM	2	15×9.3	5.56	15°	1.6	0.8		
ZDKT150520SR-GM	2	15×9.3	5.56	15°	2.0	2.1		
ZDKT150530SR-GM	2	15×9.3	5.56	15°	3.0	1.9		
ZDKT150540SR-GM	2	15×9.3	5.56	15°	4.0	1.1		
ZDKT150550SR-GM	2	15×9.3	5.56	15°	5.0	0.7		
ZDKT150508SR-GR	2	15×9.3	5.56	15°	0.8	1.6		
ZDKT150508SR-HR	2	15×9.3	5.56	15°	0.8	1.6		
ZDKT150508ER-SM	2	15×9.3	5.56	15°	0.8	1.6		

· 使用圆弧角 R = R2 以上的刀片时，需要调整刀体的圆弧角部  
如果有需要修正，请联系我们进行受注品对应。

· When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be modified.  
Please contact us for modification service if necessary.



单位:mm Unit:mm

涂层种类 Grade of Coated Materials										
	XC3020	XP3025	XC3030	XP3035	XP2025	XP2040	XC1015	XC5035	XC5040	XP6015
	7827057	7828057	7825057	7814057	7826057	7813057				
	7827028	7828028	7825029	7814029	7826029	7813028	7812029			
				7814077		7813077				
				7814078		7813078				
				7814079		7813079				
				7814080		7813080				
				7814081		7813081				
				7814082		7813082				
	7827058	7828058	7825058	7814058		7813058	7812058			
										7824036
								7815056	7816056	

## ■加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材料 Best

○第二推荐材料 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
CK010	NM	有 Wet				◎		
XC3020	GL GM GR	无 Dry	◎		○			
XP3025	GL GM GR	有 Wet	◎		○			
XC3030	GL GM GR	无 Dry	◎		○			
XP3035	GL GM GR	无 Dry	◎	○	○			
		有 Wet						

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
XP2025	GL GM	有 Wet	○	◎			○	
XP2040	GL GM GR	无 Dry	○	◎				○
		有 Wet	○	◎			○	
XC1015	GM GR	无 Dry			◎			
XC5035	SM	无 Dry		◎				
		有 Wet		○			○	
XC5040	SM	有 Wet		○			◎	
XP6015	HR	无 Dry	○		○			◎

NM: 铝合金用 GL: 轻切削用 GM: 中切削用 GR: 重切削用 HR: 高硬度钢用 SM: 耐热合金用

NM: Aluminum Alloy GL: Light Cutting GM: Middle Cutting GR: Heavy Cutting HR: High Hardened Steel SM: Heat Resistance Alloy

## ■切削条件基准表 Cutting Conditions


加工材料 Work Material	抗拉强度·硬度 Tensile Strength·Hardness	刀片尺寸 Insert Size							
		ZD*T11...				ZDKT15...			
		切削深度 ap:10mm 切削宽度 ae:0.2D		切削深度 ap:3mm 切削宽度 ae:1.0D		切削深度 ap:14mm 切削宽度 ae:0.2D		切削深度 ap:5mm 切削宽度 ae:1.0D	
		切削速度 Vc (m/min) Cutting Speed	每刃进给量 fz (mm/t) Feed per Tooth	切削速度 Vc (m/min) Cutting Speed	每刃进给量 fz (mm/t) Feed per Tooth	切削速度 Vc (m/min) Cutting Speed	每刃进给量 fz (mm/t) Feed per Tooth	切削速度 Vc (m/min) Cutting Speed	每刃进给量 fz (mm/t) Feed per Tooth
P 软钢、低碳素钢 Mild Steel, Carbon Steel (SS400, S10C)	~180HB	180 (100 ~ 250)	0.25 (0.2 ~ 0.5)	180 (100 ~ 250)	0.12 (0.05 ~ 0.2)	180 (100 ~ 250)	0.3 (0.2 ~ 0.6)	180 (100 ~ 250)	0.15 (0.05 ~ 0.25)
	~280HB	180 (100 ~ 250)	0.2 (0.15 ~ 0.4)	180 (100 ~ 250)	0.11 (0.05 ~ 0.2)	180 (100 ~ 250)	0.25 (0.15 ~ 0.5)	180 (100 ~ 250)	0.12 (0.05 ~ 0.2)
	~280HB	150 (80 ~ 200)	0.2 (0.15 ~ 0.4)	150 (80 ~ 200)	0.1 (0.05 ~ 0.18)	150 (80 ~ 200)	0.25 (0.15 ~ 0.5)	150 (80 ~ 200)	0.12 (0.05 ~ 0.2)
M 不锈钢(干式) Stainless Steel (Dry) (SUS304, SUS420)	~250HB	150 (80 ~ 200)	0.18 (0.15 ~ 0.4)	150 (80 ~ 200)	0.1 (0.05 ~ 0.18)	150 (80 ~ 200)	0.2 (0.15 ~ 0.45)	150 (80 ~ 200)	0.12 (0.05 ~ 0.2)
	~250HB	80 (60 ~ 120)	0.18 (0.15 ~ 0.4)	80 (60 ~ 120)	0.1 (0.05 ~ 0.18)	80 (60 ~ 120)	0.2 (0.15 ~ 0.45)	80 (60 ~ 120)	0.12 (0.05 ~ 0.2)
K 铸铁 Cast Iron (FC250)	~350N/mm <sup>2</sup>	180 (100 ~ 300)	0.25 (0.15 ~ 0.5)	180 (100 ~ 300)	0.12 (0.05 ~ 0.2)	180 (100 ~ 300)	0.3 (0.2 ~ 0.6)	180 (100 ~ 300)	0.15 (0.05 ~ 0.25)
	~800N/mm <sup>2</sup>	180 (100 ~ 250)	0.15 (0.1 ~ 0.4)	180 (100 ~ 250)	0.12 (0.05 ~ 0.2)	180 (100 ~ 250)	0.2 (0.15 ~ 0.5)	180 (100 ~ 250)	0.15 (0.05 ~ 0.25)
N 铝合金 Aluminum Alloy	~13%Si	300 (200 ~ 1,500)	0.3 (0.2 ~ 0.5)	300 (200 ~ 1,500)	0.15 (0.1 ~ 0.25)	300 (200 ~ 1,500)	0.35 (0.2 ~ 0.6)	300 (200 ~ 1,500)	0.18 (0.1 ~ 0.3)
S 超耐热合金(湿式) Superalloy (Wet) (Inconel 718)	-	35 (25 ~ 60)	0.15 (0.1 ~ 0.3)	35 (25 ~ 60)	0.1 (0.05 ~ 0.15)	35 (25 ~ 60)	0.2 (0.1 ~ 0.3)	35 (25 ~ 60)	0.12 (0.05 ~ 0.15)
	-	40 (30 ~ 120)	0.18 (0.1 ~ 0.35)	40 (30 ~ 120)	0.1 (0.08 ~ 0.25)	40 (30 ~ 120)	0.22 (0.1 ~ 0.35)	40 (30 ~ 120)	0.12 (0.08 ~ 0.25)
H 预硬钢 Pre-hardened Steel (NAK80)	40~43HRC	100 (40 ~ 150)	0.18 (0.1 ~ 0.3)	90 (40 ~ 150)	0.1 (0.08 ~ 0.2)	100 (40 ~ 150)	0.22 (0.1 ~ 0.35)	90 (40 ~ 150)	0.12 (0.08 ~ 0.25)
	43~48HRC	80 (40 ~ 120)	0.12 (0.08 ~ 0.2)	70 (40 ~ 120)	0.08 (0.06 ~ 0.15)	80 (40 ~ 120)	0.15 (0.08 ~ 0.25)	70 (40 ~ 120)	0.1 (0.06 ~ 0.2)
	50~55HRC	60 (40 ~ 90)	0.1 (0.05 ~ 0.2)	50 (40 ~ 90)	0.06 (0.05 ~ 0.1)	60 (40 ~ 90)	0.12 (0.05 ~ 0.2)	50 (40 ~ 90)	0.08 (0.05 ~ 0.12)

·槽铣时推荐使用粗牙型。 ·上述条件表为短柄型的推荐参数。

·上述数值是根据切削速度的标准数值, 请根据加工环境适当调整。

· Course pitch is recommended for Slotting. · Above recommended speed is for Short Shank Type.

· The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.

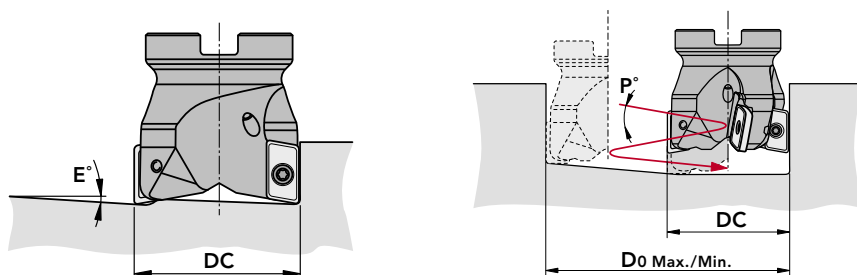

# Maximum Ramping (E) & Helical (P) Angle

■ 斜线加工·螺旋线加工时的最大倾斜角(E) Maximum Ramping (E) & Helical (P) Angle

刀片尺寸 Insert Size	ZD*T11...				ZDKT15...			
	外径(mm) DC	倾斜角 Ramping Angle E°	螺旋线开孔 Helical Milling (mm)		倾斜角 Ramping Angle E°	螺旋线开孔 Helical Milling (mm)		螺旋角度 Helical Angle P°
			最小径 Do Min.	最大径 Do Max.		最小径 Do Min.	最大径 Do Max.	
16	10.8	18	29	9.5	-	-	-	
17	9.8	22	31	7.0	-	-	-	
18	9.8	22	33	7.0	-	-	-	
20	9.8	30	37	7.0	-	-	-	
21	8.5	32	39	4.5	-	-	-	
22	7.5	34	41	4.5	-	-	-	
25	7.5	40	47	4.5	9.5	37	48	7.5
26	6.8	42	49	4.2	8.3	38	50	6.0
28	6.3	46	53	3.9	8.3	39	54	5.6
30	5.5	50	57	3.4	7.4	43	58	5.3
32	4.8	53	61	3.2	6.8	47	62	5.0
33	4.5	56	63	3.0	6.3	49	64	4.2
35	3.2	60	67	2.5	5.9	53	68	3.8
40	2.9	72	77	2.2	5.1	63	78	3.2
50	2.2	93	98	1.7	2.5	86	98	2.5
63	1.8	118	123	1.5	2.5	111	124	1.5
80	1.4	152	157	1.0	2.0	147	158	1.3
100	-	-	-	-	1.5	190	198	1.1
125	-	-	-	-	0.9	240	248	0.9

# Cutting Data


加工数据 Cutting Data

## Inconel 718 (45HRC) 的长寿命加工 Long tool life on Inconel 718


使用工具 Tool	PSE11R032SS32-5S ( $\phi 32 \times 5$ 刀)	其他公司 Competitor
使用刀片(材质) Insert (grade)	ZDKT11T308ER-SM (XC5040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	Inconel 718 (45HRC)	
切削速度 Cutting Speed	30m/min (298min <sup>-1</sup> )	25m/min (248min <sup>-1</sup> )
进给速度 Feed	120mm/min (0.08mm/t)	80mm/min (0.08mm/t)
切削深度 Depth of Cut	ap=1mm ae=20mm	ap=1mm ae=20mm
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	立式加工中心 (BT40) Vertical Machining Center	

与以往刀具相比，切削参数提高50%后仍可继续加工，耐久性提高2倍，且为正常磨损，仍可继续加工。

Our product was able to mill at conditions that were 50% higher than those for competitors' tools. It provided double the durability with normal wear and was able to continue milling.

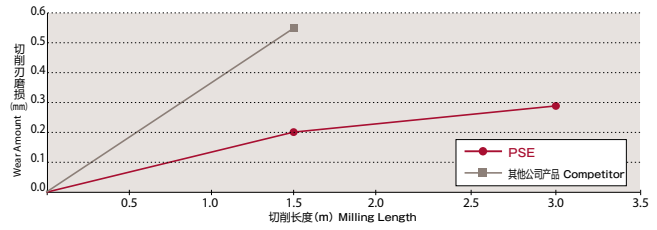


### 加工1.5m 后照片 After 1.5m of milling

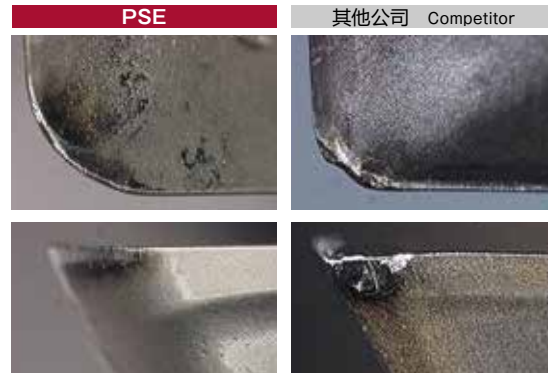

## NAK80 (40HRC) 的长寿命加工 Long tool life on NAK80 (40HRC)

使用工具 Tool	PSE11R020SS20-3S ( $\phi 20 \times 3$ 刀)	其他公司 Competitor
使用刀片(材质) Insert (grade)	ZDKT11T308SR-GL (XP2040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	NAK80 (40HRC)	
切削速度 Cutting Speed	130m/min (2,070min <sup>-1</sup> )	
进给速度 Feed	1,400mm/min (0.23mm/t)	
切削深度 Depth of Cut	ap=0.3mm ae=10mm	
切削油剂 Coolant	气冷式 Air Blow	
使用机械 Machine	立式加工中心 (BT50) Vertical Machining Center	

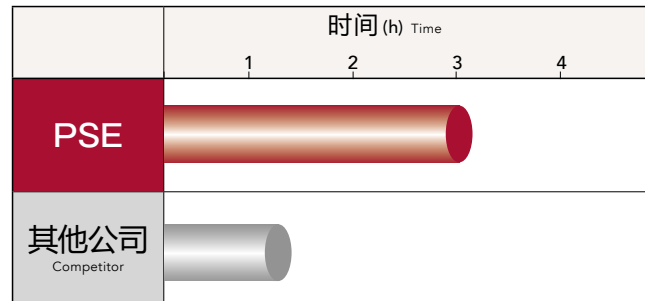


在相同的切削条件下，其他公司的产品已经发生崩刃，但是PSE没有发生任何的崩损，仍可稳定加工，耐久性也约为2倍。


The competitor's tool chipped, but under the same conditions, the PSE did not exhibit any chipping, performed stably, and provided approximately double the durability.

## 粗加工的长寿命化 Long tool life in roughing

使用工具 Tool	PSE15R032SS32-3S ( $\phi 32 \times 3$ 刃)	其他公司 Competitor
使用刀片(材质) Insert (grade)	ZDKT150508SR-GM (XC3030)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	S50C	
切削速度 Cutting Speed	180m/min (1,790min <sup>-1</sup> )	
进给速度 Feed	1,000mm/min (0.2mm/t)	
切削深度 Depth of Cut	ap=3mm ae=25.2mm	
切削油剂 Coolant	气冷式 Air Blow	
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center	

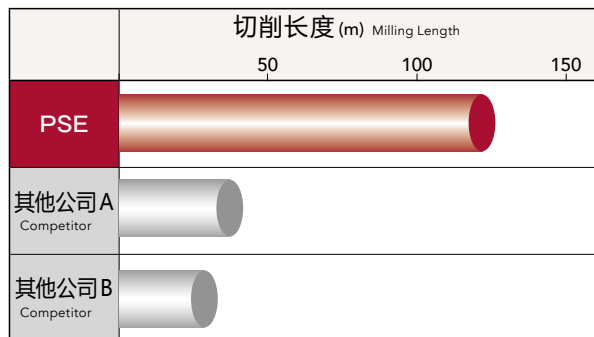

## PSE 加工128m后的照片 Photo after milling 128m

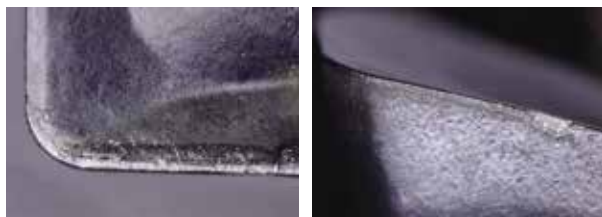


与其他公司产品相比, 耐磨损性能更强。

抑制磨损, 可大幅提高使用寿命。

In comparison to the competitors, the PSE (XC3030) has much great wear resistance, which leads to longer tool life.

## 机械零部件的正面加工 Face milling of machine parts

使用工具 Tool	PSE15R100M31.7-10 ( $\phi 100 \times 10$ 刃)	其他公司 Competitor
使用刀片(材质) Insert (grade)	ZDKT150508SR-GM (XP2040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SUS304	
切削速度 Cutting Speed	150m/min (478min <sup>-1</sup> )	
进给速度 Feed	720mm/min (0.15mm/t)	500mm/min (0.15mm/t)
切削深度 Depth of Cut	ap=1mm ae=60mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心(BT40) Horizontal Machining Center	
切削量 Cutting Volume	43.2cm <sup>3</sup> /min	30cm <sup>3</sup> /min

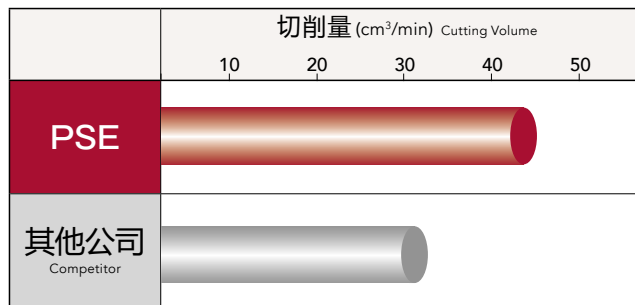

断续加工等孔较多的正面加工情况下, 可以得到比其他公司产品1.4倍的效率。而且能进一步抑制发热, 与其他公司产品相比, 可抑制工件变形, 改善对后序加工的影响。


This process consisted of intermittent face milling a surface with multiple holes, and our product was able to mill with 1.4 times the efficiency of the competitor's tool. Moreover, it inhibited the generation of heat, reducing the distortion of the workpiece as well as the effects passed on to the subsequent process.

# Cutting Data

加工数据 Cutting Data

## 喷嘴的槽加工 Groove milling of a nozzle piece


使用工具 Tool	PSE11R020SS20-3S ( $\phi 20 \times 3$ 刃)	其他公司 Competitor
使用刀片(材质) Insert (grade)	ZDKT11T308ER-SM (XC5040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SUS630	
切削速度 Cutting Speed	160m/min (2,548min <sup>-1</sup> )	
进给速度 Feed	510mm/min (0.07mm/t)	
切削深度 Depth of Cut	ap=2mm ae=20mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	复合加工机 Compound Machine	

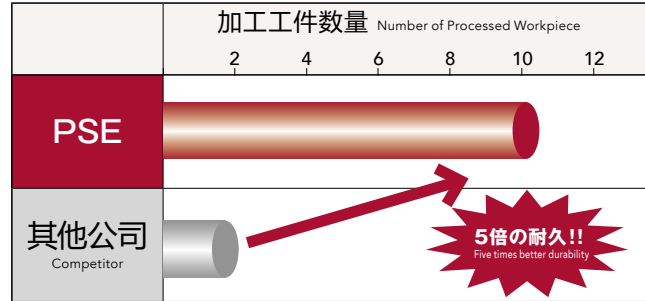

不锈钢的槽加工案例。其他公司的产品由于切屑堵塞，过早发生崩刃而无法加工。而PSE切屑由于排出稳定，可加工10个工件，性能非常好。This process consists of groove milling in stainless steel. The competitor's tool caused the chips to jam, resulting in premature breakage of the tool. The PSE, in contrast, evacuated chips in a stable manner and could mill 10 workpieces, a significant improvement.

## 容器长寿命加工 Long life milling of a chamber

使用工具 Tool	PSE15R080M25.4-8 ( $\phi 80 \times 8$ 刃)	其他公司 Competitor
使用刀片(材质) Insert (grade)	ZDKT150508SR-GM (XP2040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SUS304	
切削速度 Cutting Speed	180m/min (717min <sup>-1</sup> )	
进给速度 Feed	700mm/min (0.12mm/t)	
切削深度 Depth of Cut	ap=1mm ae=60mm	
切削油剂 Coolant	气冷式 Air Blow	
使用机械 Machine	卧式加工中心 (BT50) Horizontal Machining Center	

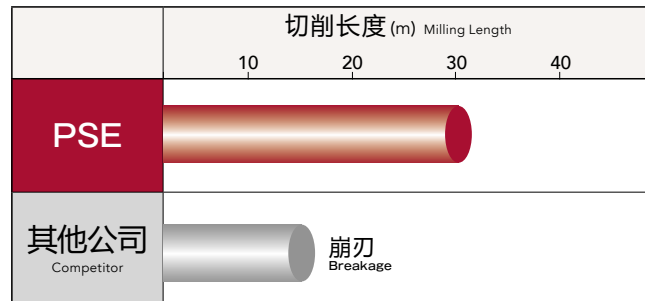



不锈钢干式加工案例。型腔开口部的正面加工，在相同条件下，传统的工具过早崩刃，不可继续加工，而PSE可得到2倍以上的耐久性。This process consisted of dry milling in stainless steel. A competitor's tool and the PSE were compared in face milling the surface of a chamber opening under identical conditions. The competitor's tool broke prematurely, and was not able to continue. However, the PSE was able to attain more than double the durability.

## 飞机零部件粗加工 Rough milling of aircraft parts

使用工具 Tool	PSE11R025SS25-4S ( $\phi 25 \times 4$ 刀)	其他公司 Competitor
使用刀片(材质) Insert (grade)	ZDKT11T308ER-SM(XC5040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	$\beta$ -Titanium alloy	
切削速度 Cutting Speed	40m/min (510min <sup>-1</sup> )	
每刃进给量 Feed per Tooth	160mm/min (0.08mm/t)	
切削深度 Depth of Cut	$a_p=5$ mm $a_e=10$ mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心(BT40) Horizontal Machining Center	


飞机零部件的粗加工案例，在同等条件下的加工比较。其他公司产品发生崩刃，但是PSE为正常磨损，为其他公司产品耐久性的1.5倍。

A competitor's product and the PSE were compared in the rough milling of aircraft parts under identical conditions. The competitor's product chipped, but the PSE wore normally and attained 1.5 times the durability.

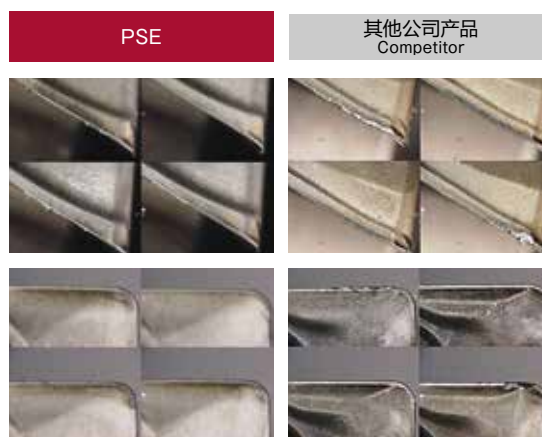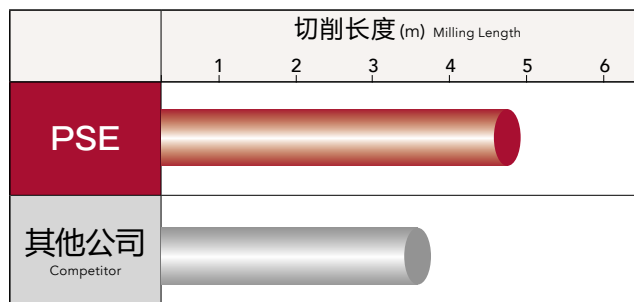


## 社内测试 DH31S (48HRC) Internal test DH31S (48HRC)

使用工具 Tool	PSE11R032SS32-3S ( $\phi 32 \times 3$ 刀)	其他公司 A、B Competitor
使用刀片(材质) Insert (grade)	ZDKT11T308SR-HR (XP6015)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	DH31S (48HRC)	
切削速度 Cutting Speed	50m/min (497min <sup>-1</sup> )	
进给速度 Feed	150mm/min (0.1mm/t)	
切削深度 Depth of Cut	$a_p=5$ mm $a_e=1$ mm	
切削油剂 Coolant	气冷式 Air Blow	
使用机械 Machine	立式加工中心(BT40) Vertical Machining Center	

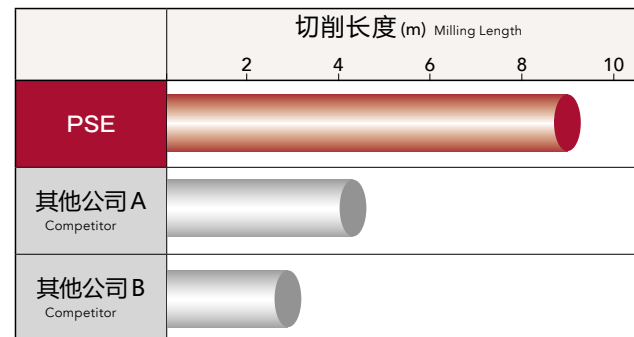

## 熔覆部的稳定加工 Stable machining of padding

使用工具 Tool	PSE15R032SS32-3S ( $\phi 32 \times 3$ 刀)	其他公司 Competitor
使用刀片(材质) Insert (grade)	ZDKT11T308SR-HR (XP6015)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	熔覆部 (56HRC) Padding	
切削速度 Cutting Speed	30m/min (300min <sup>-1</sup> )	
进给速度 Feed	110mm/min (0.12mm/t)	
切削深度 Depth of Cut	$a_p=11$ mm $a_e=5\sim 20$ mm	
切削油剂 Coolant	气冷式 Air Blow	
使用机械 Machine	立式加工中心(BT50) Vertical Machining Center	

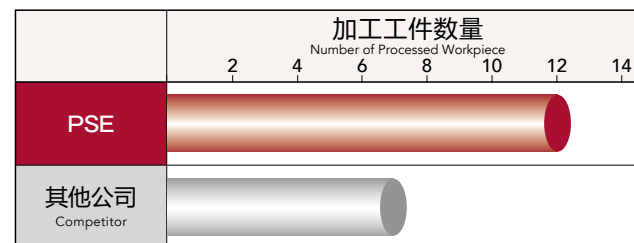

其他公司的刀片大多易磨损，寿命不稳定。

PSE(XP6015)的寿命稳定，约可提高1.5倍的寿命。

The competitor tool exhibited frequent insert breakage, which is an indicator for instability. OSG's PSE (XP6015), on the other hand, demonstrated consistent performance with 1.7 times the durability versus the competition.

# » Phoenix PSEL

玉米铣刀系列  
Roughing End Mill Series


Phoenix Roughing End Mill




## ■ 最适合化的刀片排列 Optimized insert arrangement

可变轴向前刀角(AR)式样, 抑制振动, 实现低阻力加工。

Variable axial rake angle (AR) suppress vibration which enables low-resistance machining.

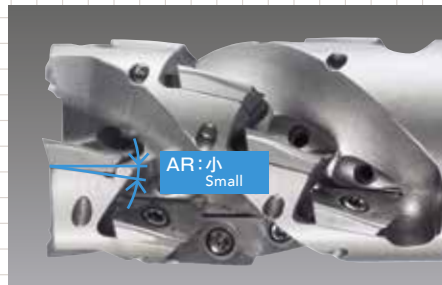

第一段: 重视耐磨损性  
1st step: for high chipping resistance

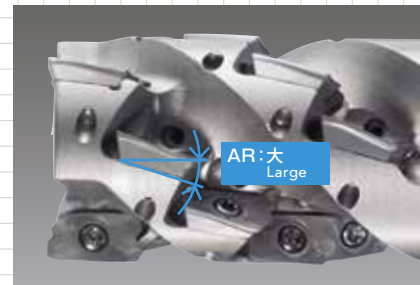

第二段以后: 重视锋利性的排列  
2nd and subsequent steps: for high sharpness

## ■ 牢固的先端刃刀片装夹

Securely clamped inserts at the tip

抑制突发性崩刃, 能实现稳定的加工


Avoids sudden chipping and enables stable machining



先端刃刀片的支撑部  
Insert support part

## ■ 由于特殊导程槽形状和每个刀片架的油孔, 能实现良好的排屑性

A special lead groove and oil hole for every insert seat enable excellent chip ejection

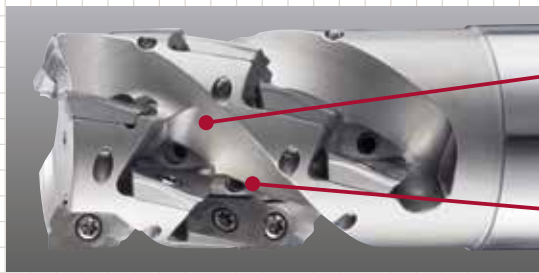

大螺旋的导程槽  
High helix lead groove

油孔  
Oil hole





## ■ 可以使用与PSE 相同的刀片, 便于管理

Enables to simplify tool management, as inserts for PSEL are interchangeable with those for PSE.

刀片种类很丰富, 能对应各种加工环境  
(参照p.85)


A wide variety of inserts cover the various types of machining (see p.85)

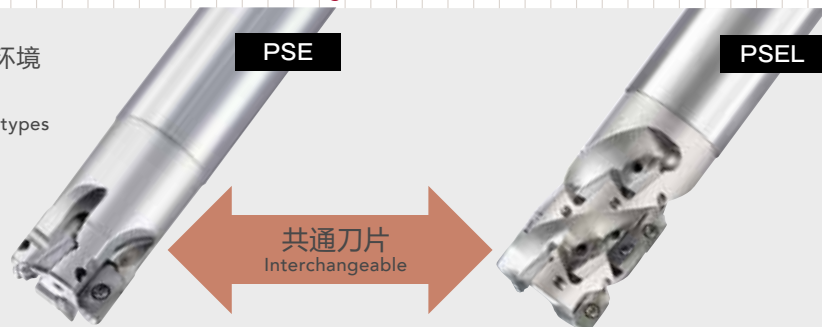

共通刀片  
Interchangeable



玉米铣刀 直柄型  
Roughing End Mill with Straight Shank

## PSEL SS

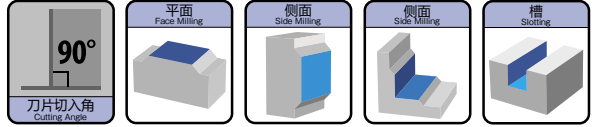

# Specification

形状尺寸表 Specification

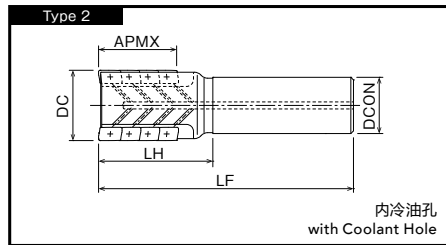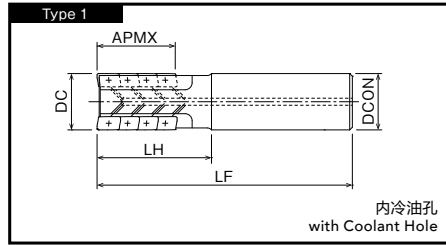


单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEFP	刃段数 No. of Insert per Flute	总刀片数 Total No. of Inserts	刃长 APMX	柄径 DCON	全长 LF	颈长 LH	重量 (kg)	适用刀片 Applicable Inserts	形状类型 Type
7802900	PSEL11R025SS25-2-27	25	2	3	6	27	25	125	50	0.39	①	1
7802901	PSEL11R032SS32-2-37	32	2	4	8	37	32	140	60	0.71		1
7802902	PSEL11R032SS32-3-45	32	3	5	15	45.5	32	140	60	0.70		1
7802903	PSEL11R040SS42-3-37	40	3	4	12	37	42	140	60	1.20		1
7802904	PSEL11R040SS42-4-45	40	4	5	20	45.5	42	140	60	1.18		1
7802905	PSEL15R040SS42-2-38	40	2	3	6	38	42	140	60	1.13	②	1
7802906	PSEL15R050SS42-3-50	50	3	4	12	50.5	42	144	64	1.31		2

# Phoenix


玉米铣刀 刀盘型  
Roughing End Mill with Bore Type

## PSEL BORE

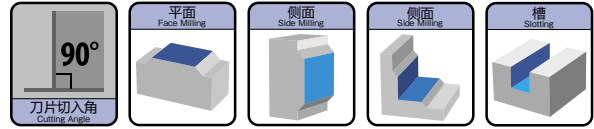

## Specification

■形状尺寸表 Specification

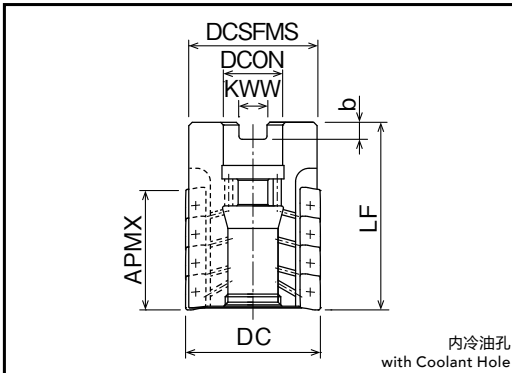


单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEFP	刃段数 No. of Insert per Flute	总刀片数 Total No. of Inserts	刃长 APMX	刀具高度 LF	刀盘径 DCSFMS	孔径 DCON	端面键槽 Key Slot		重量 (kg)	适用刀片 Applicable Inserts
										宽度 KWW	深度 b		
7802850	PSEL15R050M22-3-50	50	3	4	12	50.5	74	45	22	10.4	6.3	0.47	②
7802851	PSEL15R063M27-3-50	63	3	4	12	50.5	74	60	27	12.4	7	0.83	
7802852	PSEL15R080M32-4-63	80	4	5	20	63	88	76	32	14.4	8	1.82	

# Accessories


## ■ 零件 Accessories

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts		适用刀具 Applicable Cutters
 固定螺丝 Clamping Screw	7808107	FS25656P (Torx 8IP)	①	ZD*T11...	PSEL SS $\phi$ 25
	7808109	FS25673P (Torx 8IP)			PSEL SS $\phi$ 32~40
	7808115	FS35686P (Torx 15IP)	②	ZDKT15...	PSEL SS $\phi$ 40~50 PSEL BORE $\phi$ 50~80
 止冷却螺钉 Coolant cap bolt	7808132	OCB-M20-08			PSEL BORE $\phi$ 50
	7808133	OCB-M24-10			PSEL BORE $\phi$ 63
	7808134	OCB-M30-14			PSEL BORE $\phi$ 80

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts		适用刀具 Applicable Cutters
 扳手 Wrench	7808225	8IP-D (Torx 8IP)	①	ZD*T11...	PSEL SS $\phi$ 25~40
	7808228	15IP-D (Torx 15IP)	②	ZDKT15...	PSEL SS $\phi$ 40~50 PSEL BORE $\phi$ 50~80

扳手请另购。 The wrenches are sold separately from the cutters.

## Inserts

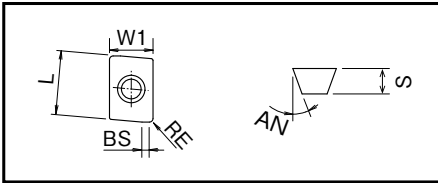

## ■ 适用刀片 Inserts

名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size					硬质合金 Uncoated	CK010
		LxW1	厚度 S	后角 AN	RE	副切削刃 BS		
ZDKT11T302FR-NM	2	11x6.8	3.8	15°	0.2	2.0	7811048	
ZDKT11T304FR-NM	2	11x6.8	3.8	15°	0.4	1.8	7811049	
ZDKT11T308FR-NM	2	11x6.8	3.8	15°	0.8	1.4	7811023	
ZDHT11T302FR-NM	2	11x6.8	3.5	15°	0.2	2.0	7811010	
ZDHT11T304FR-NM	2	11x6.8	3.5	15°	0.4	1.8	7811024	
ZDHT11T308FR-NM	2	11x6.8	3.5	15°	0.8	1.4	7811014	
ZDHT11T312FR-NM	2	11x6.8	3.5	15°	1.2	1.4	7811015	
ZDHT11T316FR-NM	2	11x6.8	3.5	15°	1.6	1.4	7811017	
ZDHT11T320FR-NM	2	11x6.8	3.5	15°	2.0	1.4	7811018	
ZDHT11T325FR-NM	2	11x6.8	3.5	15°	2.5	1.4	7811019	
ZDHT11T332FR-NM	2	11x6.8	3.5	15°	3.2	0.8	7811020	
ZDHT11T340FR-NM	2	11x6.8	3.5	15°	4.0	-	7811021	
ZDHT11T350FR-NM	2	11x6.8	3.5	15°	5.0	-	7811022	
ZDKT11T304SR-GL	2	11x6.8	3.8	15°	0.4	1.8		
ZDKT11T308SR-GL	2	11x6.8	3.8	15°	0.8	1.4		
ZDKT11T312SR-GL	2	11x6.8	3.8	15°	1.2	1.0		
ZDKT11T320SR-GL	2	11x6.8	3.8	15°	2.0	2.1		
① ZDKT11T332SR-GL	2	11x6.8	3.8	15°	3.2	1.5		
ZDKT11T304SR-GM	2	11x6.8	3.8	15°	0.4	1.8		
ZDKT11T308SR-GM	2	11x6.8	3.8	15°	0.8	1.4		
ZDKT11T312SR-GM	2	11x6.8	3.8	15°	1.2	1.0		
ZDKT11T320SR-GM	2	11x6.8	3.8	15°	2.0	2.1		
ZDKT11T325SR-GM	2	11x6.8	3.8	15°	2.5	1.6		
ZDKT11T330SR-GM	2	11x6.8	3.8	15°	3.0	1.5		
ZDKT11T340SR-GM	2	11x6.8	3.8	15°	4.0	-		
ZDKT11T308SR-GR	2	11x6.8	3.8	15°	0.8	1.4		
ZDKT11T308SR-HR	2	11x6.8	3.8	15°	0.8	1.4		
ZDKT11T304ER-SM	2	11x6.8	3.8	15°	0.4	1.8		
ZDKT11T308ER-SM	2	11x6.8	3.8	15°	0.8	1.4		
ZDKT11T312ER-SM	2	11x6.8	3.8	15°	1.2	1.1		
ZDKT11T316ER-SM	2	11x6.8	3.8	15°	1.6	0.8		
ZDKT11T320ER-SM	2	11x6.8	3.8	15°	1.2	0.3		
ZDKT11T325ER-SM	2	11x6.8	3.8	15°	2.5	-		
ZDKT11T332ER-SM	2	11x6.8	3.8	15°	3.2	-		
ZDKT11T340ER-SM	2	11x6.8	3.8	15°	4.0	-		




# Phoenix

玉米铣刀系列  
Roughing End Mill Series

## PSEL刀片

Inserts

### Inserts

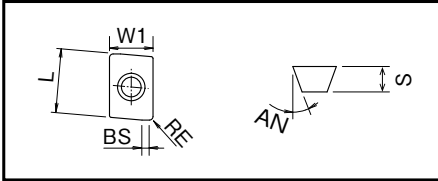

◀ FROM

■ 适用刀片 Inserts

名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size					硬质合金 Uncoated		
		L×W1	厚度 S	后角 AN	RE	副切削刃 BS	CK010		
②	ZDKT150508FR-NM	2	15×9.3	5.56	15°	0.8	1.6	7811046	
	ZDKT150508SR-GL	2	15×9.3	5.56	15°	0.8	1.6		
	ZDKT150508SR-GM	2	15×9.3	5.56	15°	0.8	1.6		
	ZDKT150512SR-GM	2	15×9.3	5.56	15°	1.2	1.2		
	ZDKT150516SR-GM	2	15×9.3	5.56	15°	1.6	0.8		
	ZDKT150520SR-GM	2	15×9.3	5.56	15°	2.0	2.1		
	ZDKT150530SR-GM	2	15×9.3	5.56	15°	3.0	1.9		
	ZDKT150540SR-GM	2	15×9.3	5.56	15°	4.0	1.1		
	ZDKT150550SR-GM	2	15×9.3	5.56	15°	5.0	0.7		
	ZDKT150508SR-GR	2	15×9.3	5.56	15°	0.8	1.6		
	ZDKT150508SR-HR	2	15×9.3	5.56	15°	0.8	1.6		
	ZDKT150508ER-SM	2	15×9.3	5.56	15°	0.8	1.6		

· 底刃上的刀片，请使用R0.8以下的刀片。

· 使用圆弧角 R = R2 以上的刀片时，需要调整刀体的圆弧角部。

如果有需要修正，请联系我们进行受注品对应。

· For the 2nd and subsequent steps, use the inserts with R0.8 or smaller.

· When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be modified.  
Please contact us for modification service if necessary.



单位:mm Unit:mm

涂层种类 Grade of Coated Materials										
	XC3020	XP3025	XC3030	XP3035	XP2025	XP2040	XC1015	XC5035	XC5040	XP6015
	7827057	7828057	7825057	7814057	7826057	7813057				
	7827028	7828028	7825029	7814029	7826029	7813028	7812029			
				7814077		7813077				
				7814078		7813078				
				7814079		7813079				
				7814080		7813080				
				7814081		7813081				
				7814082		7813082				
	7827058	7828058	7825058	7814058		7813058	7812058			
										7824036
								7815056	7816056	

## 加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材料 Best

○第二推荐材料 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
CK010	NM	有 Wet				◎		
XC3020	GL GM GR	无 Dry	◎		○			
XP3025	GL GM GR	有 Wet	◎		○			
XC3030	GL GM GR	无 Dry	◎		○			
XP3035	GL GM GR	无 Dry 有 Wet	◎	○	○			

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
XP2025	GL GM	有 Wet	○	◎			○	
XP2040	GL GM GR	无 Dry	○	○				○
		有 Wet	○	◎			○	
XC1015	GM GR	无 Dry			◎			
XC5035	SM	无 Dry		◎				
		有 Wet		○			○	
XC5040	SM	有 Wet		○			◎	
XP6015	HR	无 Dry	○		○			◎

NM: 铝合金用 GL: 轻切削用 GM: 中切削用 GR: 重切削用 HR: 高硬度钢用 SM: 耐热合金用

NM: Aluminum Alloy GL: Light Cutting GM: Middle Cutting GR: Heavy Cutting HR: High Hardened Steel SM: Heat Resistance Alloy

切削深度(ap) 1.1 ~ 1.5D、  
切削宽度0.1D 以下时的参数表。  
The chart below is based on the following condition:  
·Depth of Cut (ap) : between 1.1D to 1.5D  
·Cutting Width (ae) ≤ 0.1D

## 切削条件基准表 Cutting Conditions

加工材料 Work Material	抗损强度·硬度 成分等 Tensile Strength ·Hardness	刀片尺寸 Insert Size			
		ZD*T11...		ZDKT15...	
		切削速度 Vc (m/min) Cutting Speed	每刃进给量 fz (mm/t) Feed Per Tooth	切削速度 Vc (m/min) Cutting Speed	每刃进给量 fz (mm/t) Feed Per Tooth
P 软钢, 低碳素钢 Mild Steel, Carbon Steel (SS400, S10C) 碳素钢, 合金钢 Carbon Steel, Alloy Steel (S50C, SCM440) 模具钢 Die Steel (SKD11, SKD61)	~180HB	160 (100 ~ 200)	0.25 (0.2 ~ 0.4)	160 (100 ~ 200)	0.3 (0.2 ~ 0.4)
	~280HB	150 (100 ~ 200)	0.2 (0.15 ~ 0.3)	150 (100 ~ 200)	0.25 (0.15 ~ 0.3)
	~280HB	130 (80 ~ 180)	0.2 (0.15 ~ 0.3)	130 (80 ~ 180)	0.25 (0.15 ~ 0.3)
M 不锈钢(干式) Stainless Steel (Dry) (SUS304, SUS420) 不锈钢(湿式) Stainless Steel (Wet) (SUS304, SUS420)	~250HB	150 (100 ~ 200)	0.12 (0.1 ~ 0.3)	150 (100 ~ 200)	0.15 (0.1 ~ 0.3)
	~250HB	80 (60 ~ 120)	0.12 (0.1 ~ 0.3)	80 (60 ~ 120)	0.15 (0.1 ~ 0.3)
K 铸铁 Cast Iron (FC250) 球墨铸铁 Ductile Cast Iron (FCD400)	~350N/mm <sup>2</sup>	160 (100 ~ 300)	0.2 (0.2 ~ 0.35)	160 (100 ~ 300)	0.25 (0.2 ~ 0.35)
	~800N/mm <sup>2</sup>	160 (100 ~ 250)	0.15 (0.2 ~ 0.3)	160 (100 ~ 250)	0.2 (0.2 ~ 0.3)
N 铝合金 Aluminum Alloy	~13%Si	300 (200 ~ 1,000)	0.25 (0.1 ~ 0.4)	300 (200 ~ 1,000)	0.3 (0.1 ~ 0.4)
	-	35 (25 ~ 60)	0.15 (0.1 ~ 0.3)	35 (25 ~ 60)	0.18 (0.1 ~ 0.3)
S 超耐热合金(湿式) Superalloy (Wet) (Inconel 718) 钛合金(湿式) Titanium Alloy (Wet) (Ti-6Al-4V)	-	40 (30 ~ 120)	0.15 (0.1 ~ 0.3)	40 (30 ~ 120)	0.18 (0.1 ~ 0.3)
	-	40 (30 ~ 120)	0.15 (0.1 ~ 0.3)	40 (30 ~ 120)	0.18 (0.1 ~ 0.3)
H 预硬钢 Pre-hardened Steel (NAK80) 铸件用钢 Steel for Die Casting (DAC-MAGIC, DH31)	40~43HRC	100 (40 ~ 150)	0.15 (0.1 ~ 0.3)	100 (40 ~ 150)	0.18 (0.1 ~ 0.3)
	43~48HRC	60 (40 ~ 120)	0.12 (0.05 ~ 0.2)	60 (40 ~ 120)	0.15 (0.05 ~ 0.2)

· 上述数值是根据实际切削速度的标准数据, 请根据加工环境适当的调整

The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.

## 切削深度变更时的参数变更的参考数 Ratio of cutting condition by cutting depth to the above standard condition

切削深度 Depth of Cut ap (mm)	最大切入宽度 Maximum width of Cut ae (mm)	切削速度系数 Ratio to adjust cutting speed VP	进给系数 Ratio to adjust feed rate fP
~ 0.2D	1D	0.8	0.5
0.25 ~ 0.3D	0.7D	0.8	0.6
0.4 ~ 0.5D	0.5D	0.9	0.7
0.6 ~ 0.7D	0.3D	0.9	0.8
0.8 ~ 1D	0.2D	1	0.9
1.1 ~ 1.5D	0.1D	1	1

例 Example

刀片尺寸 ZD\*T11...、侧面切削

φ32、ap = 30mm、S50C 切削时

Insert size ZD\*T11... for cutting φ32, ap=30, side milling, for carbon steel (S50C) machining

· 150m/min(Vc) × 1.0(VP) = 150m/min

· 0.2mm/t(fz) × 0.9(fP) = 0.18mm/t

· ae: 0.2 × φ32 = 6.4mm以下



or less

# Cutting Data

加工数据 Cutting Data

## FCD450机械性零部件的铸件小径侧面加工 Side milling of the internal circumference of FCD450 machine parts with casting surface

使用工具 Tool	PSEL11R032SS32-3-45 ( $\phi 32 \times 3$ 刃)	其他公司( $\phi 32 \times 2$ 刃) Competitor
使用刀片(材质) Insert (grade)	ZDKT11T308SR-GR (XP3035)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	FCD450	
切削速度 Cutting Speed	100m/min (995min <sup>-1</sup> )	80m/min (795min <sup>-1</sup> )
进给速度 Feed	600mm/min (0.2mm/t)	240mm/min (0.15mm/t)
切削深度 Depth of Cut	$a_p=33\text{mm}$ $a_e=5\text{mm}$	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
刀具悬伸 Overhang Length	200mm	
使用机械 Machine	立式加工中心(BT50) Vertical Machining Center	

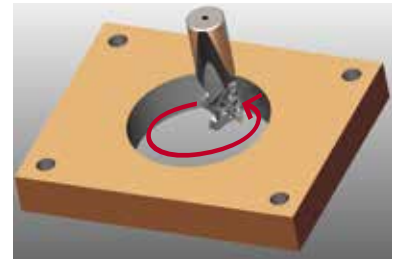
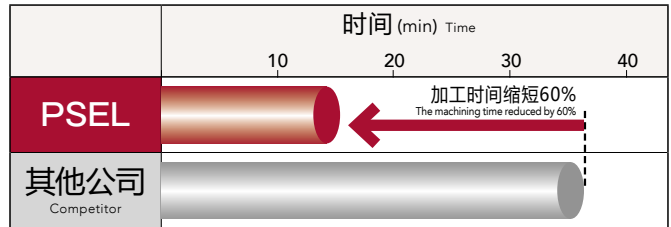


与其他公司产品相比, 加工时间缩短了60%。加工杂音极小, 加工很稳定, 加工完30个工件后的磨损量也很少。另外, 使用其他公司产品时多发生的突发性崩刃也很少发生。

The machining time was reduced by 60% compared with the competitor's product. The sound was low with the stable machining. Its wear after machining 30 workpieces was minimal, and sudden chipping, which was occurred by the competitor's product, was unlikely to happen.

## 预硬钢机械性零部件的侧面加工 Side milling of pre-hardened steel machine parts

使用工具 Tool	PSEL11R040SS42-3-37 ( $\phi 40 \times 3$ 刃)	其他公司( $\phi 40 \times 2$ 刃) Competitor
使用刀片(材质) Insert (grade)	ZDKT11T308SR-GR (XP2040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	NAK80 (45HRC)	
切削方法 Cutting Speed	150m/min (1,200min <sup>-1</sup> )	
进给速度 Feed	450mm/min (0.13mm/t)	240mm/min (0.1mm/t)
切削深度 Depth of Cut	$a_p=25\text{mm}$ $a_e=5\text{mm}$	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
刀具悬伸 Overhang Length	180mm	
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center	

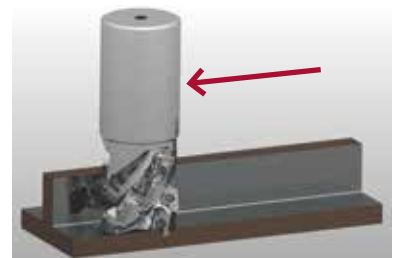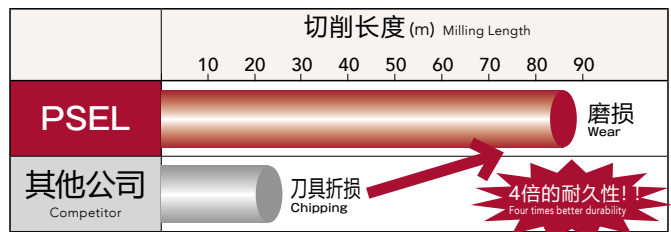

与其他公司产品相比, 加工时间缩短了47% (PSEL: 加工1个加工件的时间为10分8秒, 其他公司产品: 同比19分钟)。而且工具寿命能延长约4倍, 使用其他公司产品时多发生的突发性崩刃也很少发生。

The machining time was reduced by 47% (PSEL: 10min. 8sec. per workpiece; the competitor's product: 19 min. per workpiece). Furthermore, the tool life became approximately 4 times, and sudden chipping, which was occurred by the competitor's product, was unlikely to happen.

## 钛合金飞机零部件的大径侧面加工 Side milling of the outer circumference of titanium alloy aircraft parts

使用工具 Tool	PSEL15R063M27-3-50 ( $\phi 63 \times 3$ 刃)	其他公司( $\phi 63 \times 4$ 刃) Competitor
使用刀片(材质) Insert (grade)	ZDKT150508ER-SM (XC5040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	Ti-6Al-4V (35HRC)	
切削速度 Cutting Speed	50m/min (250min <sup>-1</sup> )	
进给速度 Feed	150mm/min (0.2mm/t)	150mm/min (0.15mm/t)
切削深度 Depth of Cut	$a_p=21\sim 45\text{mm}$ $a_e=7.5\sim 25\text{mm}$	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
刀具悬伸 Overhang Length	300mm	
使用机械 Machine	卧式加工中心(HSK100A) Horizontal Machining Center	



PSEL 能加工 3 个加工件(加工 276 分钟时溶着磨损), 其他公司产品只加工 1 个加工件(92 分钟时发生崩刃), PSEL 的工具寿命比其他产品长约 3 倍。使用其他公司产品时多发生的突发性崩刃也很少发生, 而且切屑形状也很良好。

The PSEL achieved 3 times longer tool life (3 workpieces and welding wear after 276 mins) than the competitor tool (1 workpiece and chipping after 92 mins). Moreover, the PSEL was able to maintain consistent chip shape and minimize the risk of sudden chipping.

# » Phoenix PSTW

6角方肩铣刀系列  
6-corner Shoulder Cutter Series

Phoenix Shoulder Cutter Triangle W-sided Insert Type



## ■ 两面6角(90°)刀片


Double-sided 6-corner (90°) insert

提高了自身刚性厚度结合低阻力的正前角设计，  
可以对应易发生振动的悬伸较长的加工。

Engineered to effectively process long overhang length applications with strong chattering resistance by a high rigidity and positive rake angle geometry



6.55mm

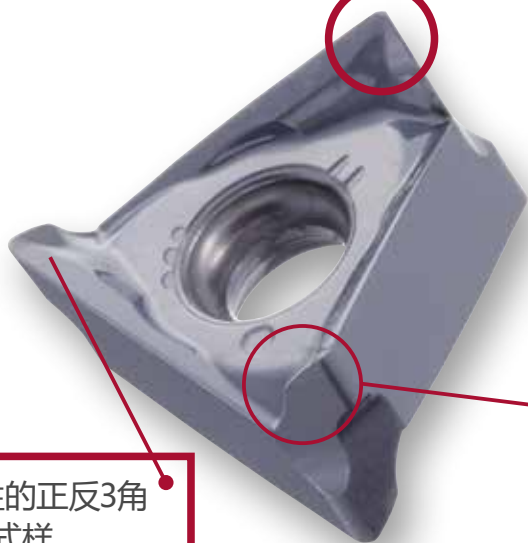

具有经济性的正反3角  
(双面6角) 式样

Economical 3-corner per side  
(6 corners in total) specification



副切削刃设计实现优  
良的精加工面

Flat cutting edge to enable  
excellent surface finish

## ■ 实现高效率加工的刀体设计

A body design engineered for high efficiency machining

最大切深量12mm  
Maximum 12mm depth of cut


对应重切削加工的容屑槽设计可以进行高  
效率加工

Chip pocket uniquely designed for heavy machining to enable maximum  
efficiency




## ■ 优良的加工面粗度 Excellent surface roughness

使用工具 Tool	PSTW12R050M22-4( $\phi 50 \times 4$ 刃) Flutes
使用刀片 (材质) Insert (grade)	TNKU120608ER-GM (XP3035)
加工材料 Work Material	S50C
切削速度 Cutting Speed	200m/min (1,274min <sup>-1</sup> )
进给速度 Feed	510mm/min (0.1mm/t)
切削深度 Depth of Cut	$a_p=0.2\text{mm}$ $a_e=32\text{mm}$
切削油剂 Coolant	无(气冷) Air Blow
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center

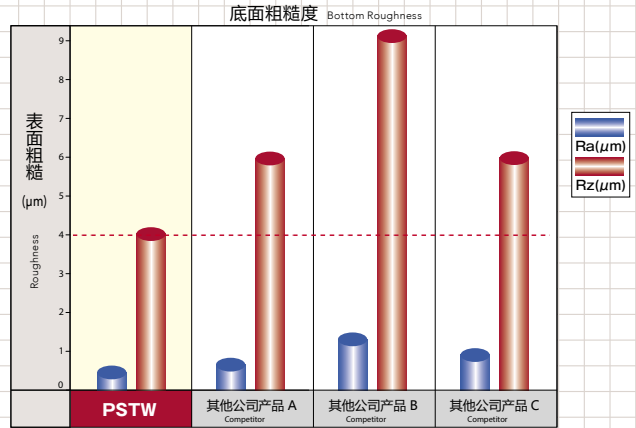


## ■ 悬长较长的加工也能高效率 High efficiency even in long overhang length applications

使用工具 Tool	PSTW12R050M22-4 ( $\phi 50 \times 4$ 刃) Flutes	其他公司方肩铣刀 ( $\phi 50 \times 5$ 刃) Flutes Competitor's Single Sided Insert Cutter
使用刀片 (材质) Insert (grade)	TNKU120608ER-GM (XP3035)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	S50C	
切削方法 Cutting Method	槽铣 Slot Milling	
切削深度 Depth of Cut	$a_p=3\text{mm}$ $a_e=50\text{mm}$	
刀具悬伸 Overhang Length	190mm (3.8D)	
切削油剂 Coolant	气冷式 Air Blow	
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center	

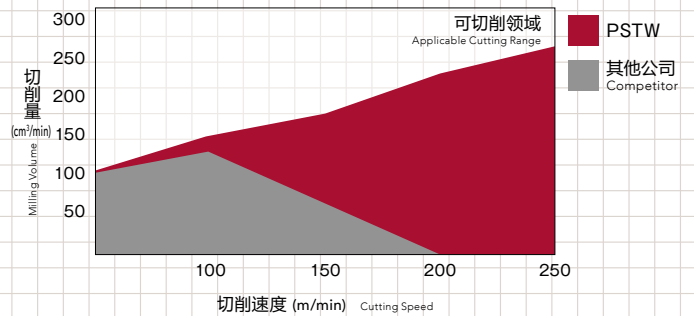




## ■ 结合加工用途的刀片种类 Variations of application based on inserts

断屑槽 Insert Breaker	NM	GL	GM	GR	SM
用途 Application	铝合金·非铁金属加工 Aluminum alloy & Non-ferrous metal	低阻力加工 Low-resistance machining	通用加工 一般钢加工 Multi-purpose machining & General steel milling	断续加工 铸铁加工 Intermittent machining & Cast iron machining	超耐热合金 难削材加工 Superalloy & Difficult-to-machine material

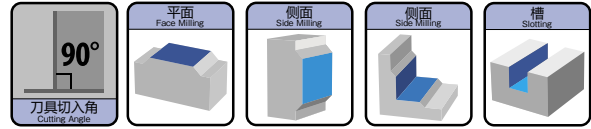

# Specification


## 形状尺寸表 Specification



单位:mm Unit:mm

商品号 EDF No.	名称 Designation	外径 DC	刃数 ZEFP	刀具高度 LF	刀盘径 DCSFMS	孔径 DCON	端面键槽 Key Slot		APMX	重量 (kg)	形状类型 Type
							宽度 <sub>KWW</sub>	深度 <sub>b</sub>			
7803100	PSTW12R050M22-3	50	3	40	45	22	10.4	6.3	12	0.30	1
7803101	PSTW12R050M22-4	50	4	40	45	22	10.4	6.3	12	0.30	1
7803102	PSTW12R063M22-3	63	3	40	50	22	10.4	6.3	12	0.48	2
7803103	PSTW12R063M22-5	63	5	40	50	22	10.4	6.3	12	0.46	2
7803104	PSTW12R080M25.4-5	80	5	50	60	25.4	9.5	6	12	1.08	2
7803110	PSTW12R080M27-5	80	5	50	60	27	12.4	7	12	1.07	2
7803105	PSTW12R080M25.4-6	80	6	50	60	25.4	9.5	6	12	1.06	2
7803111	PSTW12R080M27-6	80	6	50	60	27	12.4	7	12	1.04	2
7803106	PSTW12R100M31.7-5	100	5	50	70	31.75	12.7	8	12	1.50	3
7803112	PSTW12R100M32-5	100	5	50	70	32	14.4	8	12	1.57	2
7803107	PSTW12R100M31.7-7	100	7	50	70	31.75	12.7	8	12	1.50	3
7803113	PSTW12R100M32-7	100	7	50	70	32	14.4	8	12	1.56	2
7803108	PSTW12R125M38.1-7	125	7	63	90	38.1	15.9	10	12	3.03	3
7803114	PSTW12R125M40-7	125	7	63	90	40	16.4	9	12	2.96	2
7803109	PSTW12R125M38.1-9	125	9	63	90	38.1	15.9	10	12	3.01	3
7803115	PSTW12R125M40-9	125	9	63	90	40	16.4	9	12	2.93	2

# Inserts

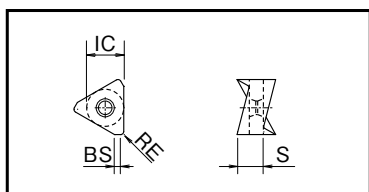

## ■ 适用刀片 Inserts

单位:mm Unit:mm

名称 Designation	切削刃数 Number of Cutting Edges	刀片尺寸 Insert Size				硬质合金 Uncoated	涂层种类 Grade of Coated Materials									
		内接圆径 IC	厚度 S	RE	副切削刃 BS		CK010	XC3020	XP3025	XC3030	XP3035	XP2040	XC1015	XP1020	XC5040	
TNHU120608ER-NM	6	10.8	6.55	0.8	1.25	7811087										
TNKH120608ER-GL	6	10.8	6.55	0.8	1.5				7825089	7814089	7813089					
TNKH120608ER-GM	6	10.8	6.55	0.8	1.5		7827088	7828088	7825088	7814088	7813088	7812088	7821088			
TNKH120612ER-GM	6	10.8	6.55	1.2	1.0					7814094	7813094					
TNKH120616ER-GM	6	10.8	6.55	1.6	0.75					7814095	7813095					
TNKH120620ER-GM	6	10.8	6.55	2.0	0.6					7814096	7813096					
TNKH120608ER-GR	6	10.8	6.55	0.8	1.5							7812090	7821090			
TNKH120608ER-SM	6	10.8	6.55	0.8	1.5											7816091

# Accessories

## ■ 零件 Accessories

	商品号 EDP No.	名称 Designation	适用刀具 Applicable Cutters
 固定螺丝 Clamping Screw	7808129	FS40511 (Torx 15)	PSTW φ50~125
 高强度螺栓 Power Screw	7808151	PS1031 (M10×31)	PSTW φ50

	商品号 EDP No.	名称 Designation	适用刀具 Applicable Cutters
 扳手 Wrench	7808208	T15-D (Torx 15)	PSTW φ50~125

扳手请另购。 The wrenches are sold separately from the cutters.

## Phoenix

6角方肩铣刀 刀盘型  
6-corner Shoulder Cutter Bore Type

## PSTW BORE

Cutting  
Conditions

## 加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材质 Best  
○第二推荐材质 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K		N	S	H
					FC	FCD			
CK010	NM	有 Wet					◎		
XC3020	GM	无 Dry	◎			○			
XP3025	GM	有 Wet	◎			○			
XC3030	GL GM	无 Dry	◎			○			
XP3035	GL GM	无 Dry	◎	○		○			
		有 Wet							
XP2040	GL GM	无 Dry	○	○					○
		有 Wet	○	◎				○	
XC1015	GM GR	无 Dry			◎	○			
XP1020	GM GR	无 Dry			○	◎			
XC5040	SM	有 Wet		○					◎

NM: 铝合金用 GL: 轻切削用 GM: 中切削用 GR: 重切削用 SM: 超耐热合金用  
 NM: Aluminum Alloy GL: Light Cutting GM: Middle Cutting GR: Heavy Cutting SM: Superalloy

## 切削条件基准表 Cutting Conditions

	加工材料 Work Material	抗损强度·硬度 Tensile Strength·Hardness	切削速度 Vc (m/min) Cutting Speed	每刃进给量 fz (mm/t) Feed per Tooth	切削深度 ap (mm) Depth of Cut
P	软钢、低碳素钢 Mild Steel, Carbon Steel (SS400, S10C)	~180HB	180 ( 100 ~ 250)	0.15 ( 0.05 ~ 0.25)	3
	碳素钢、合金钢 Carbon Steel, Alloy Steel (S50C, SCM440)	~280HB	180 ( 100 ~ 250)	0.15 ( 0.05 ~ 0.25)	3
	模具钢 Die Steel (SKD11, SKD61)	~280HB	150 ( 80 ~ 200)	0.12 ( 0.05 ~ 0.2)	3
M	不锈钢(干式) Stainless Steel (Dry) (SUS304, SUS420)	~250HB	150 ( 80 ~ 200)	0.1 ( 0.05 ~ 0.18)	2
	不锈钢(湿式) Stainless Steel (Wet) (SUS304, SUS420)	~250HB	80 ( 60 ~ 120)	0.1 ( 0.05 ~ 0.18)	2
K	铸铁 Cast Iron (FC250)	~350N/mm <sup>2</sup>	200 ( 100 ~ 350)	0.2 ( 0.1 ~ 0.3)	3
	球墨铸铁 Ductile Cast Iron (FCD400)	~800N/mm <sup>2</sup>	180 ( 100 ~ 270)	0.15 ( 0.05 ~ 0.25)	3
N	铝合金 Aluminum Alloy	~13%Si	300 ( 200 ~ 1,500)	0.15 ( 0.1 ~ 0.3)	3
S	超耐热合金(湿式) Superalloy (Wet) (Inconel 718)	-	35 ( 25 ~ 60)	0.08 ( 0.05 ~ 0.15)	1
	钛合金(湿式) Titanium Alloy (Wet) (Ti-6Al-4V)	-	40 ( 30 ~ 120)	0.08 ( 0.05 ~ 0.15)	1.5
H	预硬钢 Pre-hardened Steel (NAK80)	40~43HRC	100 ( 50 ~ 150)	0.1 ( 0.08 ~ 0.2)	1.5
	铸件用钢 Steel for Die Casting (DAC-MAGIC, DH31)	43~48HRC	80 ( 40 ~ 120)	0.08 ( 0.06 ~ 0.15)	1
	调质钢 Hardened Steel (SKD11)	50~55HRC	60 ( 40 ~ 90)	0.06 ( 0.05 ~ 0.1)	0.5

· 上述数值是实际切削速度的标准数据, 请根据加工环境适当调整。

· The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.



# Cutting Data

加工数据 Cutting Data

## 冲压模具构件滑面的高精度加工 High-precision machining of press mold slide surface

使用工具 Tool	PSTW12R050M22-4(φ50×4刃) Flutes
使用刀片(材质) Insert (grade)	TNKU120608ER-GR (XP1020)
加工材料 Work Material	FCD500
切削速度 Cutting Speed	300m/min (1,910min <sup>-1</sup> )
进给速度 Feed	1,700mm/min (0.2mm/t)
切削深度 Depth of Cut	ap=0.5mm ae=0.3mm
刀具悬伸 Overhang Length	240mm
切削油剂 Coolant	无(气冷) Air Blow
使用机械 Machine	龙门加工中心 (BT50) Double Column Machining Center

侧面精加工, 满足偏移量在10μm 的要求精度, 并获得良好的加工面精度。  
The PSTW was able to achieve excellent surface precision during side finishing, satisfying the required run-out accuracy of under 10μm.

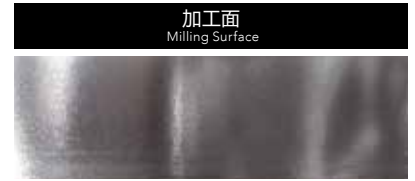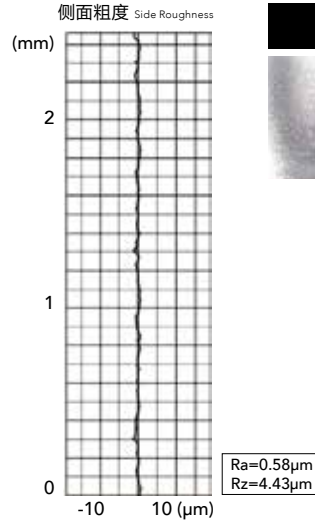

## SUS304的高效率加工 High efficiency machining of SUS304

使用工具 Tool	PSTW12R050M22-4 (φ50×4刃) Flutes	其他公司方肩铣刀(φ50×5刃) Competitor's Single Sided Insert Cutter Flutes
使用刀片(材质) Insert (grade)	TNKU120608ER-GL (XP2040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SUS304	
切削速度 Cutting Speed	150m/min (955min <sup>-1</sup> )	
进给速度 Feed	700mm/min (0.18mm/t)	700mm/min (0.15mm/t)
切削深度 Depth of Cut	ap=5mm ae=35mm	ap=3mm ae=35mm
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	龙门加工中心 (BT50) Double Column Machining Center	

其他公司产品随着切深量( ap )的上升, 发生振动, 效率得不到提升。更严重的则会产生毛刺。而PSTW 在少一刃的前提下, 可以提高67% 的加工效率。

With the increase of depth of cut (ap), the competitor tool exhibited chattering and burrs, which hindered further efficiency improvement. Whereas the PSTW, even with one less corner, was able to increase machining efficiency by 67%, allowing high productivity.

PSTW : 产生毛刺(小)  
Small amount of burrs



其他公司 : 产生毛刺(大)  
Competitor : Large amount of burrs



# Cutting Data


■加工数据 Cutting Data

## ■ 建机控制阀粗加工 Rough milling of construction machinery control valve

使用工具 Tool	PSTW12R063M22-5 (φ63×5刃) Flutes	其他公司方肩铣刀 (φ63×5刃) Flutes Competitor's Double Sided Insert Cutter
使用刀片(材质) Insert (grade)	TNKH120608ER-GR (XP1020)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	FCD500	
切削速度 Cutting Speed	180m/min (910min <sup>-1</sup> )	
进给速度 Feed	1,000mm/min (0.22mm/t)	
切削深度 Depth of Cut	ap=3mm ae=45mm	
切削油剂 Coolant	无(气冷) Air Blow	
使用机械 Machine	卧式加工中心 (BT50) Horizontal Machining Center	

其他公司产品相比, 耐磨损性优良。特别是切入时可以抑制磨损进行, 可实现约3.5倍耐久。

The PSTW demonstrated much greater wear resistance versus the competitor tool. In particular, it was able to effectively suppress wear progress of the cutting edge and achieved 3.5 times the durability versus the competitor.

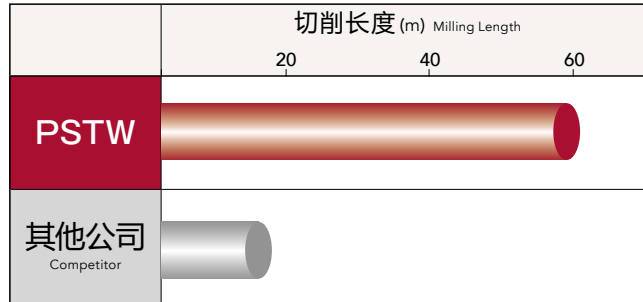

加工17m时的照片  
After machining 17m




## ■ Ti-6Al-4V的長寿命加工 Long tool life in Ti-6Al-4V

使用工具 Tool	PSTW12R050M22-4 (φ50×4刃) Flutes	其他公司方肩铣刀A、B (φ50×4刃) Flutes Competitors' Double Sided Insert Cutter
使用刀片(材质) Insert (grade)	TNKH120608ER-SM (XC5040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	Ti-6Al-4V	
切削速度 Cutting Speed	40m/min (255min <sup>-1</sup> )	
进给速度 Feed	82mm/min (0.08mm/t)	
切削深度 Depth of Cut	ap=1.5mm ae=20mm	
切削油剂 Coolant	无(气冷) Air Blow	
使用机械 Machine	卧式加工中心 (BT50) Horizontal Machining Center	

其他公司 (里外3角式样) 在加工开始时就发生磨损·崩刃。PSTW (XC5040) 可以有效抑制磨损, 提高寿命。

The PSTW (XC5040) was able to suppress wear resistance to prolong durability whereas the competitor equivalent product (double sided triangle insert) exhibited early wear and chipping.

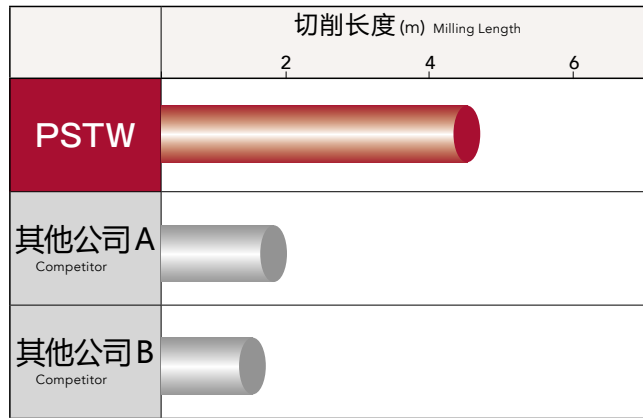

PSTW(加工4m时)  
After machining 4m

其他公司A(加工2m时)  
Competitor (After machining 2m)




### 悬伸300mm(5D)的高效率稳定加工 Highly efficient stable processing of long overhang length of 300 mm (5D)

使用工具 Tool	PSTW12R063M22-5 ( $\phi 63 \times 5$ 刃) Flutes	其他公司方肩铣刀( $\phi 63 \times 4$ 刃) Competitor's Double Sided Insert Cutter
使用刀片(材质) Insert (grade)	TN KU120608ER-GM (XC3030)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	FC250	
切削深度 Depth of Cut	$a_p=2\text{mm}$ $a_e=44\text{mm}$	
刀具悬伸 Overhang Length	300mm (5D)	
切削油剂 Coolant	无(气冷) Air Blow	
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center	

L/D=5的长悬伸加工中, 与其他公司产品相比可高效率加工。另外其他公司产品在低转速领域, 由于锋利性不足导致工件吃入性不好而发生振动(图表斜线部分)。切削锋利性优良의 PSTW 在低转速领域也能稳定加工。


In this test, the PSTW achieved higher efficiency versus the competitor tool in the processing of long overhang length of L/D=5. Furthermore, due to the lack of sharpness in the cutting edge, the competitor tool had poor contact with the workpiece in the low-speed machining range, resulting in chattering (lined area on graph). With an ultra sharp cutting edge, the PSTW was able to achieve stable performance even in the low-speed cutting range.

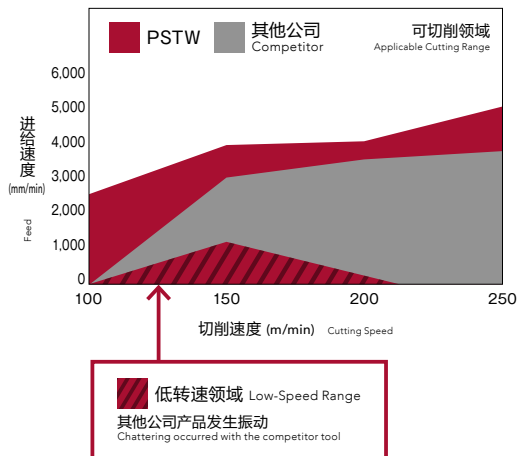


# » Phoenix PHC

四角刀片高进给铣刀系列  
High Feed Radius Cutter Series

Phoenix High feed Cutter

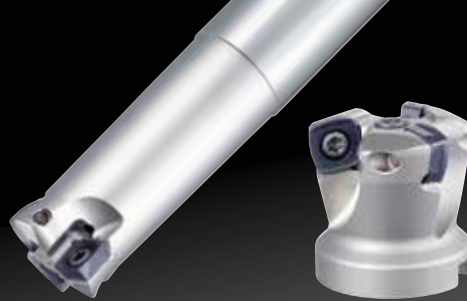

## ■丰富的产品种类 Broad Product Variations

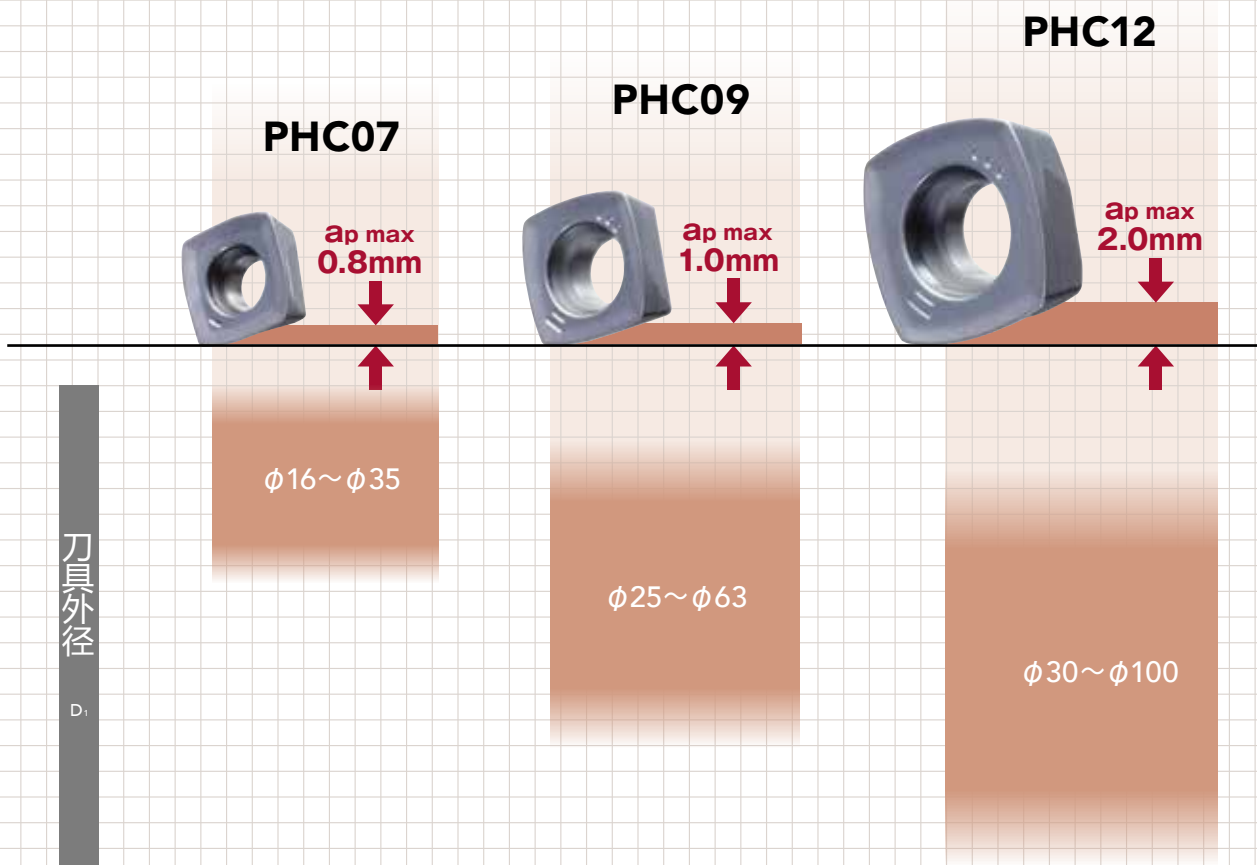

### ■小径~大径的丰富种类, 可对应广泛的加工领域。

Broad product variations and sizes to accommodate a wide range of machining needs

### ■粗加工时实现加工时间缩短。

Achieves processing time reduction in roughing

### ■低阻力式样, 即使小型加工中心也可高效率加工。

High efficiency processing is possible even on small machining centers with low resistance specifications

## ■适用于粗加工

Ideal configuration for rough milling

- 经济的4角规格。  
Economical 4-corner type
- 既保持刃尖的刚性, 又重视锋利性的断屑槽形状。  
A breaker shape that enhances cutting performance while ensuring the rigidity of the cutter
- 顺畅的切屑处理, 具良好的排屑性。  
Trouble-free chip evacuation capability with smooth chip control



## 根据切深量(ae)变化的切削阻力

Cutting force is reduced by changing the depth of cut (ae)

## —低阻力刃形—

### 与其他公司产品相比低阻力!


The PHC exhibited a lower cutting force versus the competitor's product!

#### 【分别使用】 Proper tool selection

- PHC09型 由于多刃规格, 能进行高效率加工 Multiple cutters for highly efficient milling
- PHC12型 适合进行断续加工或长悬长加工 For milling intermittently or with a long overhang length

#### PHCφ50 切削数据 Processing data of PHC φ50

使用工具 Tool	PHC09R050M22-5 (5刃)	PHC12R050M22-4 (4刃)
使用刀片(材质) Insert (grade)	SDMT09T308SR-GM (XP3035)	SXMT120410SR-GM (XP3035)
加工材料 Work Material	S50C	
切削速度 Cutting Speed	180m/min (1,150min <sup>-1</sup> )	
进给速度 Feed	5,000mm/min	
切削深度 Depth of Cut	ap=1mm ae=5, 10, 20, 30, 35mm	
刀具悬伸 Overhang Length	200mm	
切削油剂 Coolant	无(气冷) Air Blow	
使用机械 Machine	立式加工中心(BT50) Vertical Machining Center	

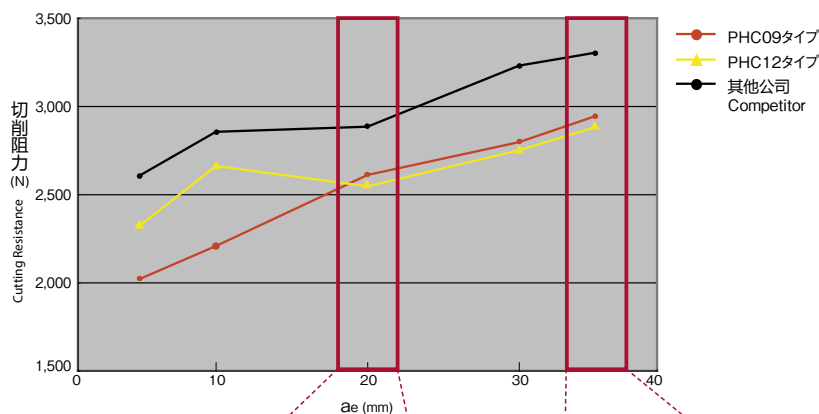

#### 同时接触刃数 Number of flutes making simultaneous contact

切深量(ae)	5mm	10mm	20mm	30mm	35mm
PHC09型	1刃 Flutes	2刃 Flutes	3刃 Flutes	3刃 Flutes	4刃 Flutes
PHC12型	1刃 Flutes	2刃 Flutes	2刃 Flutes	3刃 Flutes	3刃 Flutes


由于多刃规格的PHC09型的刃尖设计为低阻力, 所以即使切深量(ae)提高, 也能抑制切削阻力。因此也能抑制机械负荷、振动, 从而实现高效率加工。

Even if the depth of cut (ae) is increased for the PHC09 with close pitch, the design of the cutting edge suppresses the cutting force. This suppresses the load and vibrations imparted on the machine, which enables high efficiency machining.

# Phoenix



四角刀片高进给铣刀 直柄型  
High Feed Radius Cutter with Straight Shank

## PHC SS

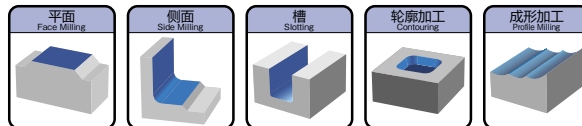

# Specification

### 形状尺寸表 Specification

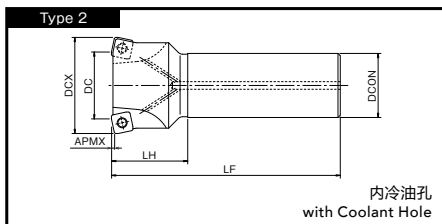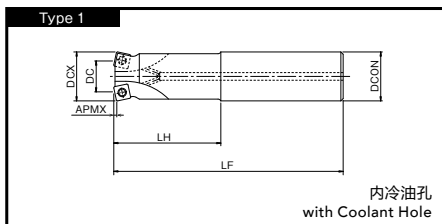

### PHC07型 PHC07 Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	刀具外径 DCX	外径 DC	刃数 ZFP	柄径 DCON	全长 LF	颈长 LH	APMX	重量 (kg)	适用刀片 Applicable Inserts	形状类型 Type
7800750	PHC07R016SS16-2S	16	7.4	2	16	100	30	0.8	0.13	①	1
7800755	PHC07R016SS16-2L	16	7.4	2	16	150	50	0.8	0.20		1
7800756	PHC07R017SS16-2L	★ 17	8.4	2	16	150	25	0.8	0.21		2
7800757	PHC07R018SS16-2L	★ 18	9.4	2	16	150	25	0.8	0.21		2
7800751	PHC07R020SS20-3S	20	11.4	3	20	130	50	0.8	0.27		1
7800758	PHC07R020SS20-3L	20	11.4	3	20	160	80	0.8	0.33		1
7800759	PHC07R021SS20-3L	★ 21	12.4	3	20	160	30	0.8	0.35		2
7800760	PHC07R022SS20-3L	★ 22	13.4	3	20	160	30	0.8	0.35		2
7800752	PHC07R025SS25-4S	25	16.4	4	25	140	60	0.8	0.47		1
7800761	PHC07R025SS25-4L	25	16.4	4	25	200	100	0.8	0.67		1
7800762	PHC07R026SS25-4L	★ 26	17.4	4	25	200	40	0.8	0.67		2
7800763	PHC07R028SS25-4L	★ 28	19.4	4	25	200	40	0.8	0.67		2
7800753	PHC07R030SS32-4S	30	21.4	4	32	150	70	0.8	0.79		1
7800764	PHC07R030SS32-4L	30	21.4	4	32	200	120	0.8	1.05		1
7800754	PHC07R032SS32-5S	32	23.4	5	32	150	70	0.8	0.83		1
7800765	PHC07R032SS32-5L	32	23.4	5	32	200	120	0.8	1.11		1
7800766	PHC07R033SS32-5L	★ 33	24.4	5	32	200	50	0.8	1.15		2
7800767	PHC07R035SS32-5L	★ 35	26.4	5	32	200	50	0.8	1.17		2

★粗刃型 详情请参阅 p.122.  
Reduced Shank Type See p.122 for details.

**NEXT**

## ★ PHC粗刃型 Reduced Shank Type

·粗刃型的刀具外径大于柄径，使其在模具零件等的深壁加工、型腔加工中最为适合。

·The outer diameter of the reduced shank type is larger than the shank diameter, making it highly effective in the processing of die and mold applications that require vertical wall milling or pocketing.

例  
Example



FROM

PHC09型 PHC09 Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	刀具外径 DCX	外径 DC	刃数 ZEFF	柄径 DCON	全长 LF	颈长 LH	APMX	重量 (kg)	适用刀片 Applicable Inserts	形状类型 Type
7800700	PHC09R025SS25-2S	25	13.2	2	25	140	60	1	0.43	②	1
7800704	PHC09R025SS25-2L	25	13.2	2	25	200	120	1	0.61		1
7800724	PHC09R025SS25-2LL	25	13.2	2	25	300	180	1	0.97		1
7800701	PHC09R025SS25-3S	25	13.2	3	25	140	60	1	0.43		1
7800705	PHC09R025SS25-3L	25	13.2	3	25	200	120	1	0.61		1
7800742	PHC09R026SS25-2LL	★ 26	14.2	2	25	300	40	1	1.03		2
7800740	PHC09R026SS25-3L	★ 26	14.2	3	25	200	40	1	0.65		2
7800725	PHC09R028SS25-2LL	★ 28	16.2	2	25	300	40	1	1.01		2
7800716	PHC09R028SS25-3S	★ 28	16.2	3	25	140	40	1	0.45		2
7800720	PHC09R028SS25-3L	★ 28	16.2	3	25	200	40	1	0.66		2
7800726	PHC09R030SS32-2LL	30	18.2	2	32	300	180	1	1.54		1
7800717	PHC09R030SS32-3S	30	18.2	3	32	150	70	1	0.76		1
7800721	PHC09R030SS32-3L	30	18.2	3	32	200	120	1	1.00		1
7800727	PHC09R032SS32-2LL	32	20.2	2	32	300	180	1	1.66		1
7800702	PHC09R032SS32-3S	32	20.2	3	32	150	70	1	0.79		1
7800706	PHC09R032SS32-3L	32	20.2	3	32	200	120	1	1.05		1
7800743	PHC09R033SS32-2LL	★ 33	21.2	2	32	300	50	1	1.71		2
7800741	PHC09R033SS32-3L	★ 33	21.2	3	32	200	50	1	1.11		2
7800728	PHC09R035SS32-2LL	★ 35	23.2	2	32	300	50	1	1.73		2
7800718	PHC09R035SS32-3S	★ 35	23.2	3	32	150	50	1	0.83		2
7800722	PHC09R035SS32-3L	★ 35	23.2	3	32	200	50	1	1.12		2
7800729	PHC09R040SS42-2LL	40	28.2	2	42	300	70	1	2.91		1
7800723	PHC09R040SS42-3L	40	28.2	3	42	250	70	1	2.37		1
7800703	PHC09R040SS32-4S	40	28.2	4	32	150	50	1	0.86		2
7800719	PHC09R040SS42-4S	40	28.2	4	42	150	50	1	1.38		1
7800707	PHC09R040SS32-4L	40	28.2	4	32	250	50	1	1.45		2


NEXT

# Phoenix

四角刀片高进给铣刀 直柄型



High Feed Radius Cutter with Straight Shank

## PHC SS

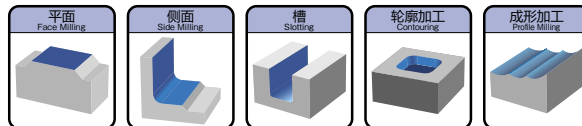

## Specification

### 形状尺寸表 Specification

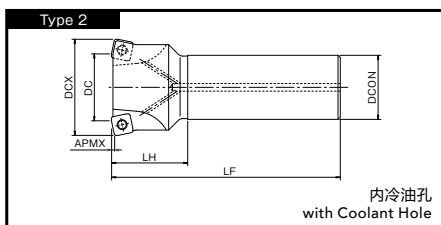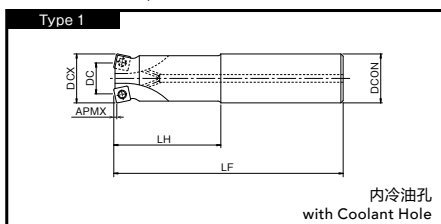

### FROM

PHC12型 PHC12 Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	刀具外径 DCX	刀具外径 DC	刃数 ZEPF	柄径 DCON	全长 LF	颈长 LH	APMX	重量 (kg)	适用刀片 Applicable Inserts	形状类型 Type
7800730	PHC12R030SS32-2S	30	13.4	2	32	150	70	2	0.74	③	1
7800733	PHC12R030SS32-2L	30	13.4	2	32	200	120	2	0.97		1
7800736	PHC12R030SS32-2LL	30	13.4	2	32	300	180	2	1.52		1
7800708	PHC12R032SS32-2S	32	15.4	2	32	150	70	2	0.80		1
7800712	PHC12R032SS32-2L	32	15.4	2	32	200	120	2	1.06		1
7800737	PHC12R032SS32-2LL	32	15.4	2	32	300	180	2	1.65		1
7800744	PHC12R033SS32-2L	★ 33	16.4	2	32	200	50	2	1.11		2
7800745	PHC12R033SS32-2LL	★ 33	16.4	2	32	300	50	2	1.70		2
7800738	PHC12R035SS32-2LL	★ 35	18.4	2	32	300	50	2	1.71		2
7800731	PHC12R035SS32-3S	★ 35	18.4	3	32	150	50	2	0.81		2
7800734	PHC12R035SS32-3L	★ 35	18.4	3	32	200	50	2	1.11		2
7800739	PHC12R040SS42-2LL	40	23.4	2	42	300	70	2	2.88		1
7800709	PHC12R040SS32-3S	40	23.4	3	32	150	50	2	0.85		2
7800732	PHC12R040SS42-3S	40	23.4	3	42	150	50	2	1.37		1
7800713	PHC12R040SS32-3L	40	23.4	3	32	250	50	2	1.44		2
7800735	PHC12R040SS42-3L	40	23.4	3	42	250	70	2	2.36	1	
7800710	PHC12R050SS42-4S	50	33.4	4	42	150	50	2	1.50	2	
7800714	PHC12R050SS42-4L	50	33.4	4	42	250	50	2	2.55	2	
7800711	PHC12R063SS42-5S	63	46.4	5	42	150	50	2	1.67	2	
7800715	PHC12R063SS42-5L	63	46.4	5	42	250	50	2	2.71	2	

★粗刃型 详细请参阅 p.122。  
Reduced Shank Type See p.122 for details.

# Phoenix



四角刀片高进给铣刀 刀盘型  
High Feed Radius Cutter with Bore Type

## PHC BORE



# Specification

### 形状尺寸表 Specification

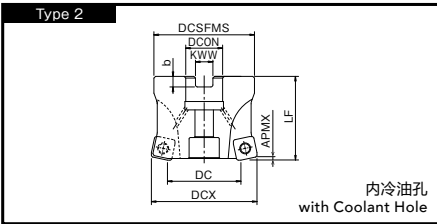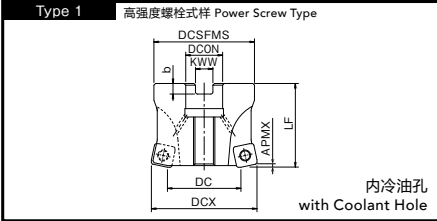

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	刀具 外径 DCX	外径 DC	刃数 ZEPF	刀具 高度 LF	刀盘径 DCSFMS	孔径 DCON	端面键槽 Key Slot		APMX	重量 (kg)	适用刀片 Applicable Inserts	形状类型 Type
								宽度 KWW	深度 b				
7800600	PHC09R040M16-4	40	28.2	4	40	38	16	8.4	5.6	1	0.23	②	1
7800601	PHC09R050M22-5	50	38.2	5	50	47	22	10.4	6.3	1	0.43		2
7800605	PHC09R050M22.2-5	50	38.2	5	50	47	22.225	8.4	5	1	0.44		2
7800603	PHC09R063M22-6	63	51.2	6	50	60	22	10.4	6.3	1	0.79		2
7800606	PHC09R063M22.2-6	63	51.2	6	50	60	22.225	8.4	5	1	0.79		2
7800607	PHC12R040M16-3	40	23.4	3	40	38	16	8.4	5.6	2	0.21		③
7800608	PHC12R050M22-4	50	33.4	4	50	47	22	10.4	6.3	2	0.41	2	
7800614	PHC12R050M22.2-4	50	33.4	4	50	47	22.225	8.4	5	2	0.41	2	
7800610	PHC12R063M22-5	63	46.4	5	50	60	22	10.4	6.3	2	0.75	2	
7800615	PHC12R063M22.2-5	63	46.4	5	50	60	22.225	8.4	5	2	0.75	2	
7800618	PHC12R080M31.7-5	80	63.4	5	63	76	31.75	12.7	8	2	1.54	2	
7800612	PHC12R080M27-7	80	63.4	7	50	76	27	12.4	7	2	1.24	2	
7800616	PHC12R080M31.7-7	80	63.4	7	63	76	31.75	12.7	8	2	1.50	2	
7800617	PHC12R100M31.7-8	100	83.4	8	63	96	31.75	12.7	8	2	2.72	2	
7800613	PHC12R100M32-8	100	83.4	8	63	96	32	14.4	8	2	2.72	2	

库存种类都为○(即标准库存品)。 Stock are categorized as ○ (Standard stock item).

# Phoenix


四角刀片高进给铣刀 螺纹安装型

High Feed Radius Cutter with Screw Fit Type

## PHC SF

# Specification

■形状尺寸表 Specification

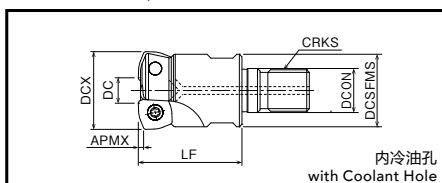

PHC 螺纹安装型 Screw Fit Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	刀具外径 DCX	外径 DC	刃数 Z/EP	装夹直径 DCON	螺纹尺寸 CRKS	扳手尺寸 Spanner Size	全长 LF	端面直径 DCSFMS	APMX	重量 (kg)	适用刀片 Applicable Inserts
7801520	PHC07R016SF8-2	16	7.4	2	8.5	M 8	10	27	14.5	0.8	0.03	①
7801521	PHC07R017SF8-2	★ 17	8.4	2	8.5	M 8	10	27	14.5	0.8	0.03	
7801522	PHC07R018SF8-2	★ 18	9.4	2	8.5	M 8	10	27	14.5	0.8	0.03	
7801523	PHC07R020SF10-3	20	11.4	3	10.5	M10	14	33	18	0.8	0.06	
7801524	PHC07R021SF10-3	★ 21	12.4	3	10.5	M10	14	33	18	0.8	0.06	
7801525	PHC07R022SF10-3	★ 22	13.4	3	10.5	M10	14	33	18	0.8	0.06	
7801526	PHC07R025SF12-4	25	16.4	4	12.5	M12	17	35	23	0.8	0.10	
7801527	PHC07R026SF12-4	★ 26	17.4	4	12.5	M12	17	35	23	0.8	0.10	
7801528	PHC07R028SF12-4	★ 28	19.4	4	12.5	M12	17	35	23	0.8	0.11	
7801529	PHC07R030SF16-4	30	21.4	4	17	M16	22	40	28	0.8	0.20	
7801530	PHC07R032SF16-5	32	23.4	5	17	M16	22	40	28	0.8	0.18	
7801531	PHC07R033SF16-5	★ 33	24.4	5	17	M16	22	40	28	0.8	0.18	
7801532	PHC07R035SF16-5	★ 35	26.4	5	17	M16	22	40	28	0.8	0.20	
7801500	PHC09R025SF12-3	25	13.2	3	12.5	M12	17	35	23	1	0.10	②
7801510	PHC09R026SF12-3	★ 26	14.2	3	12.5	M12	17	35	23	1	0.11	
7801501	PHC09R028SF12-3	★ 28	16.2	3	12.5	M12	17	35	23	1	0.11	
7801502	PHC09R030SF16-3	30	18.2	3	17	M16	22	40	28	1	0.17	
7801503	PHC09R032SF16-3	32	20.2	3	17	M16	22	40	28	1	0.18	
7801511	PHC09R033SF16-3	★ 33	21.2	3	17	M16	22	40	28	1	0.19	
7801504	PHC09R035SF16-3	★ 35	23.2	3	17	M16	22	40	28	1	0.19	
7801505	PHC09R040SF16-4	40	28.2	4	17	M16	22	40	28	1	0.22	
7801506	PHC12R030SF16-2	30	13.4	2	17	M16	22	40	28	2	0.17	③
7801507	PHC12R032SF16-2	32	15.4	2	17	M16	22	40	28	2	0.18	
7801512	PHC12R033SF16-2	★ 33	16.4	2	17	M16	22	40	28	2	0.19	
7801508	PHC12R035SF16-3	★ 35	18.4	3	17	M16	22	40	28	2	0.18	
7801509	PHC12R040SF16-3	40	23.4	3	17	M16	22	40	28	2	0.22	


刀具夹具, 刀柄请参考 P.190~P.192

See p.190-p.192 for shank holders.

★ 粗刃型 详细请参阅 p.122.

Reduced Shank Type See p.122 for details.

## Inserts

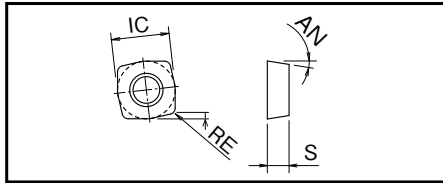

### 适用刀片 Inserts

单位:mm Unit:mm

名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size				涂层种类 Grade of Coated Materials								
		IC	厚度 S	后角 AN	RE	XC3020	XP3025	XC3030	XP3035	XP2025	XP2040	XC1015	XC5035	XC5040
① SPMT070305SR-GM	4	7.0	2.75	11°	0.5	7827092	7828092	7825092	7814092	7826092	7813092	7812092		
	4	7.0	2.75	11°	0.5									7816093
② SDMT09T308SR-GM	4	9.52	3.97	15°	0.8	7827020	7828020	7825020	7814020	7826020	7813020	7812020		
	4	9.52	3.97	15°	0.8								7815021	7816021
③ SXMT120410SR-GM	4	12.7	4.76	9°	1	7827022	7828022	7825022	7814022	7826022	7813022	7812022		
	4	12.7	4.76	9°	1								7815023	7816023

## Accessories

### 零件 Accessories

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts	适用刀具 Applicable Cutters
固定螺丝 Clamping Screw	7808105	FS25550 (Torx 8)	① SPMT07...	PHCSS/SF $\phi$ 16~35
	7808111	FS35572 (Torx 15)	② SDMT09...	PHC SS/SF $\phi$ 25~35
	7808112	FS35586 (Torx 15)		PHC SS/SF $\phi$ 40 PHC BORE $\phi$ 40~63
	7808113	FS45510 (Torx 20)	③ SXMT12...	PHC SS/SF $\phi$ 30~63 PHC BORE $\phi$ 40~100
高强度螺栓 Power Screw	7808150	PS0830 (M8×30)	② SDMT09...	PHC BORE $\phi$ 40
			③ SXMT12...	

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts	适用刀具 Applicable Cutters
扳手 Wrench	7808205	T8-D (Torx 8)	① SPMT07...	PHCSS/SF $\phi$ 16~35
	7808208	T15-D (Torx 15)	② SDMT09...	PHC SS/SF $\phi$ 25~40 PHC BORE $\phi$ 40~63
	7808209	T20-D (Torx 20)	③ SXMT12...	PHC SS/SF $\phi$ 30~63 PHC BORE $\phi$ 40~100

扳手请另购。 The wrenches are sold separately from the cutters.

# Phoenix

## 四角刀片高进给铣刀系列

High Feed Radius Cutter Series

# PHC

### 加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材质 Best  
○第二推荐材质 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
XC3020	GM	无 Dry	◎		○			
XP3025	GM	有 Wet	◎		○			
XC3030	GM	无 Dry	◎		○			
XP3035	GM	无 Dry	◎	○	○			
		有 Wet						
XP2025	GM	有 Wet	○	◎			○	
XP2040	GM	无 Dry	○	○				○
		有 Wet	○	◎			○	
XC1015	GM	无 Dry			◎			
XC5035	SM	无 Dry		◎				
		有 Wet		○			○	
XC5040	SM	有 Wet		○			◎	

GM:中切削用 SM:耐热合金用

GM:Middle Cutting SM:Heat Resistance Alloy

# Cutting Conditions


### 切削条件基准表 Cutting Conditions

加工材料 Work Material	抗拉强度·硬度 Tensile Strength Hardness	切削速度 Vc (m/min) Cutting Speed	刀片尺寸 Insert Size											
			SPMT07...			SDMT09...			SXMT12...					
			每刃进给量 fz (mm/t) Feed per Tooth	切削深度 ap (mm) Depth of Cut			每刃进给量 fz (mm/t) Feed per Tooth	切削深度 ap (mm) Depth of Cut			每刃进给量 fz (mm/t) Feed per Tooth	切削深度 ap (mm) Depth of Cut		
				L/D=2	L/D=3	L/D=4		L/D=2	L/D=3	L/D=4		L/D=2	L/D=3	L/D=4
P 软钢、低碳素钢 Mild Steel, Low Carbon Steel (SS400, S10C) 碳素钢、合金钢 Carbon Steel, Alloy Steel (S50C, SCM440) 模具钢 Die Steel (SKD11, SKD61)	~180HB	180 (60 ~ 250)	0.7 (0.3 ~ 1.5)	0.8	0.6	0.4	0.8 (0.3 ~ 1.8)	1	0.8	0.5	1.25 (0.5 ~ 3.2)	1.2	1.2	1
	~280HB	180 (60 ~ 250)	0.7 (0.3 ~ 1.3)	0.8	0.6	0.4	0.8 (0.3 ~ 1.5)	1	0.8	0.5	1.25 (0.5 ~ 3)	1.2	1.2	1
	~280HB	180 (60 ~ 250)	0.7 (0.3 ~ 1.3)	0.6	0.5	0.3	0.8 (0.3 ~ 1.5)	0.8	0.6	0.4	1.25 (0.5 ~ 3)	1.2	1.2	1
M 不锈钢(干式) Stainless Steel (Dry) (SUS304, SUS420) 不锈钢(湿式) Stainless Steel (Wet) (SUS304, SUS420)	~250HB	160 (80 ~ 200)	0.4 (0.3 ~ 1.2)	0.6	0.5	0.3	0.5 (0.3 ~ 1.5)	0.8	0.6	0.4	1 (0.5 ~ 2.5)	1.2	1	1
	~250HB	120 (60 ~ 180)	0.4 (0.3 ~ 1.2)	0.6	0.5	0.3	0.5 (0.3 ~ 1.5)	0.8	0.6	0.4	1 (0.5 ~ 2.5)	1.2	1	1
K 铸铁 Cast Iron (FC250) 球墨铸铁 Ductile Cast Iron (FCD400)	~350N/mm <sup>2</sup>	200 (100 ~ 300)	0.8 (0.4 ~ 1.5)	0.8	0.6	0.4	1 (0.5 ~ 1.8)	1	0.8	0.5	1.5 (0.5 ~ 3.5)	1.5	1.5	1
	~800N/mm <sup>2</sup>	180 (100 ~ 250)	0.7 (0.3 ~ 1.3)	0.8	0.6	0.4	0.9 (0.5 ~ 1.5)	1	0.8	0.5	1.35 (0.5 ~ 3)	1.2	1.2	0.9
S 超耐热合金(湿式) Superalloy (Wet) (Inconel 718) 钛合金(湿式) Titanium Alloy (Wet) (Ti-6Al-4V)	-	30 (25 ~ 60)	0.3 (0.2 ~ 0.7)	0.4	0.4	0.3	0.4 (0.2 ~ 0.8)	0.5	0.5	0.4	0.5 (0.2 ~ 1)	1	1	0.8
	-	80 (50 ~ 120)	0.4 (0.3 ~ 0.8)	0.4	0.4	0.3	0.5 (0.3 ~ 1)	0.5	0.5	0.3	0.7 (0.3 ~ 1.2)	0.8	0.8	0.4
H 预硬钢 Pre-hardened Steel (NAK80) 铸件用钢 Steel for Die Casting (DAC-MAGIC, DH31) 调质钢 Hardened Steel (SKD11)	40~43HRC	120 (40 ~ 150)	0.4 (0.2 ~ 0.8)	0.4	0.4	0.3	0.5 (0.2 ~ 1)	0.5	0.5	0.3	0.8 (0.3 ~ 1.5)	1	1	0.5
	43~48HRC	90 (40 ~ 120)	0.3 (0.2 ~ 0.6)	0.4	0.4	0.3	0.4 (0.2 ~ 0.8)	0.5	0.5	0.3	0.7 (0.3 ~ 1.2)	0.7	0.7	0.5
	50~55HRC	60 (40 ~ 90)	0.2 (0.2 ~ 0.5)	0.3	0.3	0.2	0.3 (0.2 ~ 0.7)	0.3	0.3	0.2	0.5 (0.3 ~ 0.8)	0.5	0.5	0.4

· 上述数值是根据实际切削速度的标准数据，请根据加工环境适当的调整。

The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.

# Maximum Ramping Angle (E)

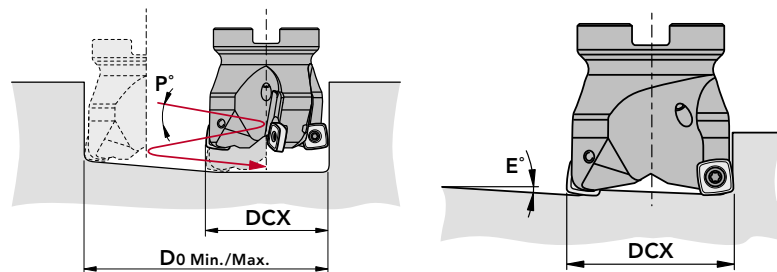

■斜线加工时的最大倾斜角(E) Maximum Ramping Angle (E)

刀片尺寸 Insert Size	SPMT07...				SDMT09...				SXMT12...			
	倾斜角 Ramping Angle E°	螺旋线开孔 Helical Milling (mm)		螺旋角度 Helical Angle P°	倾斜角 Ramping Angle E°	螺旋线开孔 Helical Milling (mm)		螺旋角度 Helical Angle P°	倾斜角 Ramping Angle E°	螺旋线开孔 Helical Milling (mm)		螺旋角度 Helical Angle P°
		最小径 Do Min.	最大径 Do Max.			最小径 Do Min.	最大径 Do Max.			最小径 Do Min.	最大径 Do Max.	
16	5.9	22	31	4.5	-	-	-	-	-	-	-	-
17	4.9	24	33	3.6	-	-	-	-	-	-	-	-
18	4.2	26	35	3.1	-	-	-	-	-	-	-	-
20	3.2	30	39	2.3	-	-	-	-	-	-	-	-
21	2.8	32	41	2.0	-	-	-	-	-	-	-	-
22	2.6	34	43	1.8	-	-	-	-	-	-	-	-
25	2.0	40	49	1.3	3.6	35	48	3.1	-	-	-	-
26	1.8	42	51	1.1	3.1	37	50	2.6	-	-	-	-
28	1.6	46	55	1.0	2.6	41	54	2.1	-	-	-	-
30	1.4	50	59	0.8	2.2	45	58	1.9	7.9	40	58	6.5
32	1.3	54	63	0.7	2.0	49	62	1.7	7.2	44	62	6.1
33	1.2	56	65	0.6	1.8	51	64	1.5	6.4	46	64	4.4
35	1.1	60	69	0.5	1.6	55	68	1.4	4.4	50	68	3.7
40	-	-	-	-	1.2	65	78	1.0	2.9	60	78	2.5
50	-	-	-	-	0.9	85	98	0.8	1.5	80	98	1.3
63	-	-	-	-	0.8	111	124	0.7	1.1	106	124	0.9
80	-	-	-	-	-	-	-	-	1.3	140	158	1.1
100	-	-	-	-	-	-	-	-	0.7	180	198	0.6

## ■程序编写时的刀尖形状设定


Flute shape definitions for the purpose of creating a program

单位:mm Unit:mm

刀片尺寸 Insert Size	RE	最大切深 ap Max.	疑似R rt	切削余量 Z
SPMT07...	0.5	0.8	1.2	0.35
SDMT09...	0.8	1	2	0.7
SXMT12...	1	2	3	1.15

加工时请将程序依照类似圆弧角铣刀的条件编写。

During machining, please program the milling paths according to the recommended simulated R (rt) respective to the individual cutter diameter.

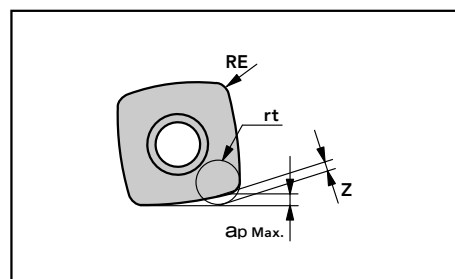



# Cutting Data

加工数据 Cutting Data

## 模座粗加工 Rough milling of mold base

使用工具 Tool	PHC07R020SS20-3S ( $\phi 20 \times 3$ 刃)	其他公司 Competitor
使用刀片(材质) Insert (grade)	SPMT070305SR-GM (XC3020)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	S50C	
切削速度 Cutting Speed	157m/min (2,500min <sup>-1</sup> )	
进给速度 Feed	6,000mm/min (0.8mm/t)	
切削深度 Depth of Cut	ap=0.5mm ae=14mm	
切削油剂 Coolant	无(气冷) Air Blow	
使用机械 Machine	立式加工中心(BT50) Vertical Machining Center	

耐磨性高的XC3020可抑制磨损进行, 约可延长1.5倍的使用寿命。  
XC3020 with high wear resistance properties was able to suppress wear and achieve 1.5 times the durability.

	切削长度 (m) Milling Length
	100 200 300 400 500 600 700 800 900
PHC	
其他公司 Competitor	

PHC 加工900m 时的照片  
After 900 of milling





## 压铸模具粗加工 Rough milling of die-casting dies

使用工具 Tool	PHC09R063M22-6 ( $\phi 63 \times 6$ 刃)	其他公司 Competitor
使用刀片(材质) Insert (grade)	SDMT09T308SR-GM (XP2040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	DAC55 (48HRC)	
切削速度 Cutting Speed	75m/min (379min <sup>-1</sup> )	118m/min (596min <sup>-1</sup> )
进给速度 Feed	1,250mm/min (0.55mm/t)	600mm/min (0.25mm/t)
切削深度 Depth of Cut	ap=0.7mm ae=25.5mm	
切削油剂 Coolant	无(气冷) Air Blow	
刀具悬伸 Overhang Length	145mm	
使用机械 Machine	立式加工中心(BT50) Vertical Machining Center	


压铸模具的粗加工。与其他公司产品相比, 能以2 倍的效率进行加工, 而且能得到2 倍的耐久寿命。另外, 由于低抵抗式样能抑制发热量, 所以切屑的颜色为棕色, 很稳定。

This product was able to mill at double the efficiency of a competitor's product while doubling the durability. Due to its low-resistance construction, it minimizes heat generation, resulting in a stable discharge of brownish chips.

	切削长度 (m) Milling Length
	50 100 150 200 250 300 350
PHC	
其他公司 Competitor	

## 压铸模具粗加工 Rough milling of die-casting dies

使用工具 Tool	PHC09R050M22-5 ( $\phi 50 \times 5$ 刀)	其他公司 Competitor
使用刀片 (材质) Insert (grade)	SDMT09T308SR-GM (XP2040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SKD61 (48HRC)	
切削速度 Cutting Speed	80m/min (510min <sup>-1</sup> )	110m/min (700min <sup>-1</sup> )
进给速度 Feed	1,360mm/min (0.53mm/t)	800mm/min (0.28mm/t)
切削深度 Depth of Cut	$a_p=0.5\text{mm}$ $a_e=25\text{mm}$	
切削油剂 Coolant	无(气冷) Air Blow	
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center	

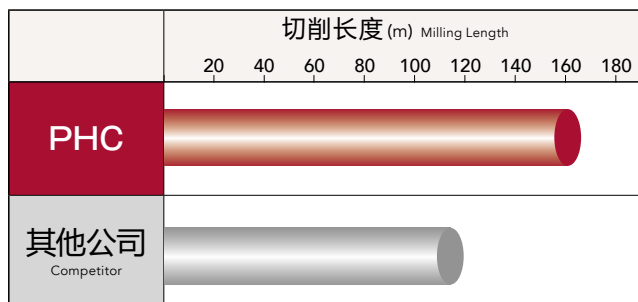


由于低抵抗刃形, 与其他公司产品相比, 能以1.7倍的效率进行加工, 而且能得到1.4倍的耐久度寿命。另外, 使用其他公司产品时, 由于加工发热导致加工件的变形, 使用PHC的加工能抑制发热量, 改善加工件的变形。

Due to its low-resistance edge form, this product was able to mill at 1.7 times the efficiency of the competitor's tool, and achieved 1.4 times the durability. Additionally, the heat generated by the competitor's tool created a distortion in the workpiece, while the PHC was able to improve the process by suppressing the generation of heat.

## 注塑模具粗加工 Rough milling of plastic dies

使用工具 Tool	PHC12R050M22-4 ( $\phi 50 \times 4$ 刀)	其他公司 Competitor
使用刀片 (材质) Insert (grade)	SXMT120410SR-GM (XP2040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	PX5 (30HRC)	
切削速度 Cutting Speed	157m/min (1,000min <sup>-1</sup> )	
进给速度 Feed	3,000mm/min (0.75mm/t)	
切削深度 Depth of Cut	$a_p=0.75\text{mm}$ $a_e=25\text{mm}$	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	立式加工中心(HSK-A100) Vertical Machining Center	

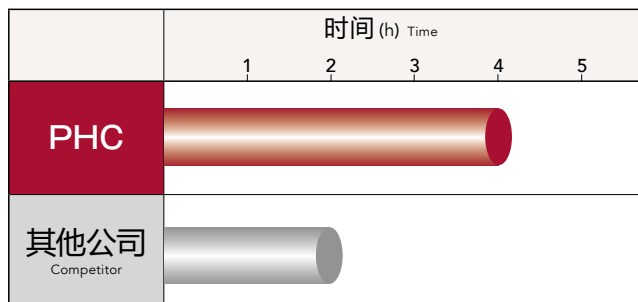

进行模具外形粗加工时, 比其他公司产品多约2倍的耐久寿命。

While rough milling a die using the same conditions as the competitor's tools, this product has doubled the durability.

# Cutting Data

加工数据 Cutting Data

## 注塑模具粗加工 Rough milling of plastic dies

使用工具 Tool	PHC12R063M22-5 ( $\phi 63 \times 5$ 刃)	其他公司产品 Competitor
使用刀片 (材质) Insert (grade)	SXMT120410SR-GM (XP2040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	HPM7 (33HRC)	
切削速度 Cutting Speed	100m/min (505min <sup>-1</sup> )	
进给速度 Feed	2,500mm/min (1mm/t)	
切削深度 Depth of Cut	ap=1.5mm ae=40mm	
切削油剂 Coolant	无 (气冷) Air Blow	
使用机械 Machine	立式加工中心 (BT50) Vertical Machining Center	

	切削长度 (m) Milling Length			
	100	200	300	400
PHC				
其他公司 Competitor				

使用其他公司产品时很早就发生崩刃，但是使用PHC的话能进行稳定加工，在使用相同参数的情况下，切削长度为其他公司产品的3倍。

A competitor's product chipped prematurely, but the PHC exhibited minimum resistance, inhibiting chipping and allowing it to mill three times the distance under the same conditions.

## 冲压模具的粗加工 Rough milling of press dies

使用工具 Tool	PHC12R050M22-4 ( $\phi 50 \times 4$ 刃)	其他公司 Competitor
使用刀片 (材质) Insert (grade)	SXMT120410SR-GM (XP2040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SKD11相等物 Equivalent	
切削速度 Cutting Speed	112m/min (713min <sup>-1</sup> )	
进给速度 Feed	2,400mm/min (0.84mm/t)	2,000mm/min (0.7mm/t)
切削深度 Depth of Cut	ap=1.25mm ae=32.2mm	
切削油剂 Coolant	无 (气冷) Air Blow	
使用机械 Machine	龙门加工中心 (BT50) Double Column Machining Center	

	时间 (h) Time			
	1	2	3	4
PHC				
其他公司 Competitor				

对冲压模具的钢材进行粗加工。使用其他公司产品时因为发生崩刃，所以进给量无法提高，但是使用PHC时，把参数提高20%也能进行稳定加工，而且能得到1.5倍的寿命。

This process consisted of rough-milling of steel for a press die. A competitor's product could not increase the feed rate due to chipping. The PHC was able to mill with stability while increasing the conditions by 20%, and also provided 1.5 times the durability.




DTC

## Inconel 718的长寿命加工 Long tool life in Inconel 718

使用工具 Tool	PHC07R025SS25-4S ( $\phi 25 \times 4$ 刀)	其他公司 Competitor
使用刀片 (材质) Insert (grade)	SPMT070305ER-SM (XC5040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	Inconel 718 (41HRC)	
切削速度 Cutting Speed	30m/min (382min <sup>-1</sup> )	
进给速度 Feed	764mm/min (0.5mm/t)	
切削深度 Depth of Cut	ap=0.5mm ae=25mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center	

PHC(XC5040)能抑制磨损,延长使用寿命。另,槽加工时无切屑卷曲缠绕等的情况,具优良的排屑性,呈现精良的加工面。

PHC (XC5040) was able to suppress wear to prolong durability. Furthermore, its unique flute geometry enables smooth chip evacuation, which contributed to an excellent surface finish.


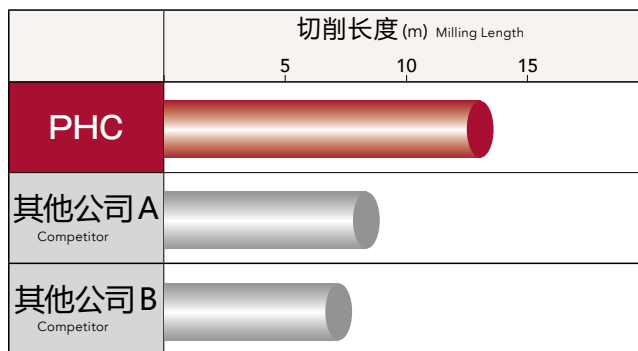
PHC (加工13.2m时)  
After 13.2m of milling

## 叶片粗加工 Rough milling of blades

使用工具 Tool	PHC09R032SS32-3S ( $\phi 32 \times 3$ 刀)	其他公司 Competitor
使用刀片 (材质) Insert (grade)	SDMT09T308ER-SM (XC5040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SUS630	
切削速度 Cutting Speed	80m/min (796min <sup>-1</sup> )	
进给速度 Feed	800mm/min (0.33mm/t)	
切削深度 Depth of Cut	ap=0.5mm ae= ~32mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	立式加工中心(BT40) Vertical Machining Center	

根据同样参数进行叶片粗加工时,能得到1.75倍的使用寿命。刀片的磨损是正常磨损,能进行稳定的加工,也能继续加工。

A blade was rough-milled under the same conditions for comparison. This tool provided 1.75 times the durability, and milled in a stable manner with inserts exhibiting normal wear. Moreover, it was capable of continued milling.

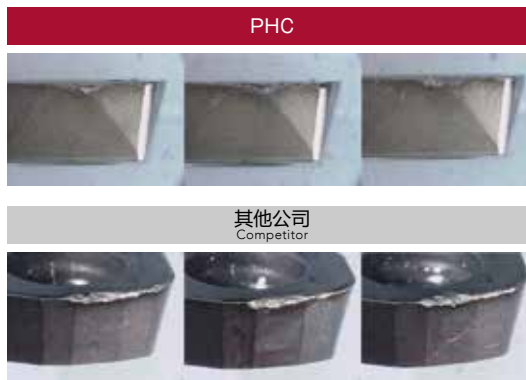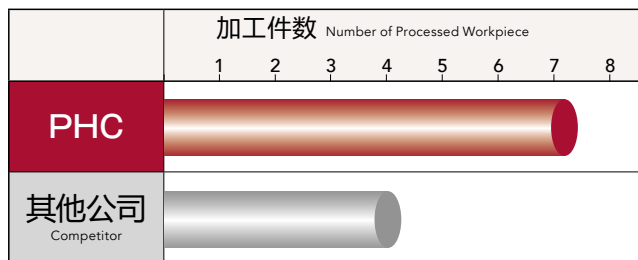

# » Phoenix PRC

圆刀片铣刀系列  
Radius Cutter Series

Phoenix Radius Cutter



## ■ 特点 Features

因为不需要压块，能顺利地排出切屑

Because it does not need a pressure bar, it can evacuate chips smoothly.

宽容屑槽，提高切屑排屑性

Chip ejection is improved by wide chip pockets.


防止刀片转动  
Insert rotation stopper




配合刀片的切槽设计  
Cutout is set to the insert rotation stopper of body.

对应三维加工的刀体后刀形状

Body relief shape support  
3 dimensional machining.



【里侧 Back side】

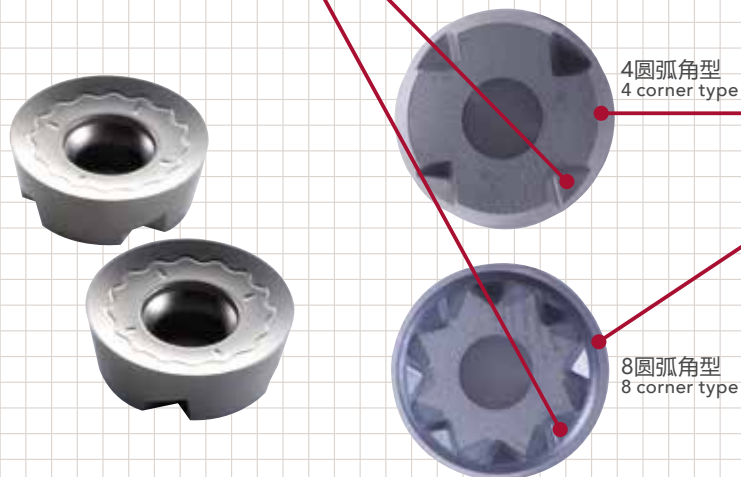

4圆弧角型  
4 corner type

8圆弧角型  
8 corner type


根据切深量设定，可以选择圆弧角的数量(4或8)

Either 4 or 8 corner can be selected by depending on the depth of cut.

圆刀片铣刀 直柄型



Radius Cutter with Straight Shank

## PRC SS

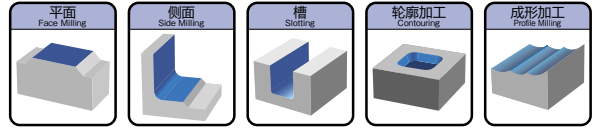

# Specification

形状尺寸表 Specification

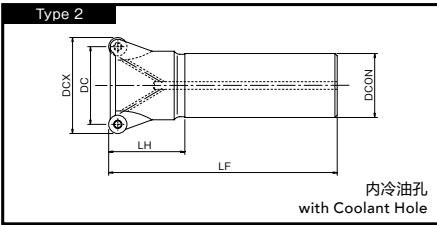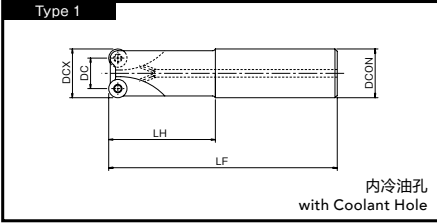

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	刀具外径 DCX	外径 DC	刃数 ZEPF	柄径 DCON	全长 LF	颈长 LH	重量 (kg)	适用刀片 Applicable Inserts	形状 类型 Type
7800300	PRC10R020SS20-2S	20	10	2	20	130	50	0.27	①	1
7800303	PRC10R020SS20-2L	20	10	2	20	180	80	0.38		1
7800301	PRC10R025SS25-3S	25	15	3	25	140	60	0.44		1
7800304	PRC10R025SS25-3L	25	15	3	25	200	120	0.62		1
7800302	PRC10R032SS32-4S	32	22	4	32	150	70	0.80		1
7800305	PRC10R032SS32-4L	32	22	4	32	200	120	1.05	1	
7800322	PRC12R024SS25-2S	24	12	2	25	140	60	0.44	②	1
7800323	PRC12R024SS25-2L	24	12	2	25	180	100	0.56		1
7800318	PRC12R030SS32-2S	30	18	2	32	150	70	0.75		1
7800319	PRC12R030SS32-2L	30	18	2	32	200	120	0.96		1
7800306	PRC12R032SS32-2S	32	20	2	32	150	70	0.79		1
7800309	PRC12R032SS32-2L	32	20	2	32	200	120	1.04		1
7800320	PRC12R032SS32-3S	32	20	3	32	150	70	0.78		1
7800321	PRC12R032SS32-3L	32	20	3	32	200	120	1.02		1
7800307	PRC12R040SS32-3S	40	28	3	32	150	50	0.88		2
7800310	PRC12R040SS32-3L	40	28	3	32	250	50	1.49		2
7800308	PRC12R050SS42-4S	50	38	4	42	150	50	1.52	③	2
7800311	PRC12R050SS42-4L	50	38	4	42	250	50	2.58		2
7800324	PRC16R032SS32-2S	32	16	2	32	150	70	0.78		1
7800325	PRC16R032SS32-2L	32	16	2	32	200	120	1.05		1
7800312	PRC16R040SS32-2S	40	24	2	32	150	50	0.85		2
7800315	PRC16R040SS32-2L	40	24	2	32	250	50	1.46		2
7800313	PRC16R050SS42-3S	50	34	3	42	150	50	0.49		2
7800316	PRC16R050SS42-3L	50	34	3	42	250	50	2.55		2
7800314	PRC16R063SS42-4S	63	47	4	42	150	50	1.63		2
7800317	PRC16R063SS42-4L	63	47	4	42	250	50	2.69	2	


库存种类都为○(即标准库存品)。 Stock are categorized as ○( Standard stock item).

# Phoenix

圆刀片铣刀 刀盘型




Radius Cutter with Bore Type

## PRC BORE

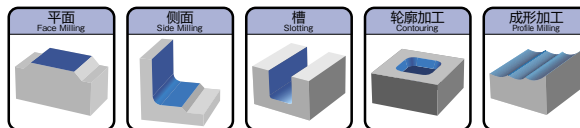

# Specification

### 形状尺寸表 Specification

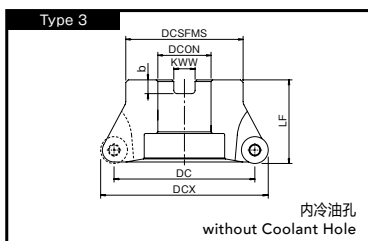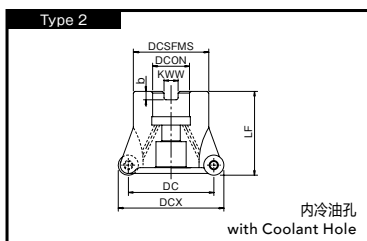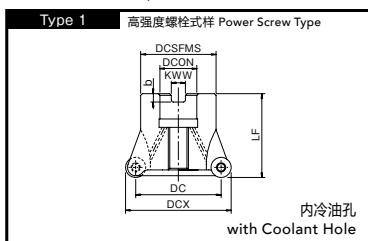


单位:mm Unit:mm

商品号 EDP No.	名称 Designation	刀具外径 DCX	外径 DC	刃数 ZEFP	刀具高度 LF	刀盘径 DCSFMS	孔径 DCON	端面键槽 Key Slot		重量 (kg)	适用刀片 Applicable Inserts	形状 类型 Type
								宽度 kWW	深度 b			
7800200	PRC12R050M22-4	50	38	4	40	45	22	10.4	6.3	0.27	②	2
7800204	PRC12R050M22-5	50	38	5	40	45	22	10.4	6.3	0.79		2
7800201	PRC12R063M22-4	63	51	4	40	50	22	10.4	6.3	0.43		2
7800206	PRC12R063M22-6	63	51	6	40	50	22	10.4	6.3	0.44		2
7800209	PRC12R080M25.4-5	80	68	5	50	60	25.4	9.5	6	0.85		2
7800202	PRC12R080M27-5	80	68	5	50	60	27	12.4	7	0.83		2
7800211	PRC12R080M25.4-8	80	68	8	50	60	25.4	9.5	6	0.93		2
7800207	PRC12R080M27-8	80	68	8	50	60	27	12.4	7	0.92		2
7800210	PRC12R100M31.7-6	100	88	6	50	70	31.75	12.7	8	1.22		3
7800203	PRC12R100M32-6	100	88	6	50	70	32	14.4	8	1.36		2
7800212	PRC12R100M31.7-10	100	88	10	50	70	31.75	12.7	8	1.29		3
7800208	PRC12R100M32-10	100	88	10	50	70	32	14.4	8	1.43		2
7800213	PRC16R050M22-3	50	34	3	40	45	22	10.4	6.3	0.28	③	1
7800214	PRC16R063M22-5	63	47	5	40	50	22	10.4	6.3	0.37		2
7800218	PRC16R080M25.4-6	80	64	6	50	60	25.4	9.5	6	0.84		2
7800216	PRC16R080M27-6	80	64	6	50	60	27	12.4	7	0.83		2
7800219	PRC16R100M31.7-7	100	84	7	50	70	31.75	12.7	8	1.20		3
7800217	PRC16R100M32-7	100	84	7	50	70	32	14.4	8	1.32	2	

# Specification

■形状尺寸表 Specification

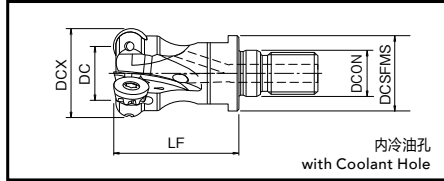

PRC 螺纹安装型 Screw Fit Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	刀具外径 DCX	外径 DC	刃数 ZEFZ	装夹直径 DCON	螺纹尺寸 CRKS	扳手尺寸 Spanner Size	全长 LF	端面直径 DCSFMS	重量 (kg)	适用刀片 Applicable Inserts
7801700	PRC10R020SF10-2	20	10	2	10.5	M10	14	33	18	0.06	①
7801701	PRC10R025SF12-3	25	15	3	12.5	M12	17	35	23	0.09	
7801702	PRC10R030SF16-3	30	20	3	17	M16	22	40	28	0.16	
7801703	PRC10R032SF16-4	32	22	4	17	M16	22	40	28	0.17	
7801704	PRC10R040SF16-4	40	30	4	17	M16	22	40	28	0.21	
7801705	PRC12R030SF16-2	30	18	2	17	M16	22	40	28	0.16	②
7801706	PRC12R032SF16-3	32	20	3	17	M16	22	40	28	0.16	
7801707	PRC12R040SF16-3	40	28	3	17	M16	22	40	28	0.22	

刀具夹具，刀柄请参考 P.190~P.192  
See p.190-p.192 for shank holders.


# Phoenix

圆刀片铣刀系列  
Radius Cutter Series

## PRC 刀片

Inserts

### Inserts

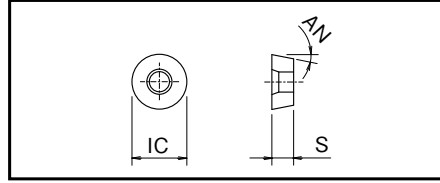

#### 适用刀片 Inserts

单位:mm Unit:mm

名称 Designation	圆弧角 (切削刃)数 No. of Cutting Edges	刀片尺寸 Insert Size			硬质合金 Uncoated		涂层种类 Grade of Coated Materials							
		内接圆径 IC	厚度 S	后角 AN	CK010	XC3030	XP3035	XP2025	XP2040	XC1015	XC5035	XC5040	XP6015	
①	RPHT10T3MOFN-NM	8	10	3.97	11°	7811009								
	RPHW10T3MOSN	8	10	3.97	11°		7825017							
	RPHW10T3MOEN	8	10	3.97	11°			7814030						
	RPHT10T3MOEN-GL	8	10	3.97	11°						7812017			
	RPHT10T3MOEN-GM	8	10	3.97	11°		7825008	7814008	7826008	7813008				
	RPHT10T3MOEN-SM	4	10	3.97	11°							7815010*		
	RPHT10T3M8EN-SM	8	10	3.97	11°							7815050	7816050	
	RPMT10T3M8EN-HR	8	10	3.97	11°									7824083
②	RPHT1204MOFN-NM	8	12	4.76	11°	7811013								
	RPHW1204MOSN	8	12	4.76	11°		7825018				7812018			
	RPHW1204MOEN	8	12	4.76	11°			7814018						
	RPHT1204MOEN-GL	8	12	4.76	11°				7826011	7813011				
	RPHT1204MOEN-GM	8	12	4.76	11°		7825011	7814011						
	RPHT1204MOEN-SM	4	12	4.76	11°							7815012*		
	RPHT1204M8EN-SM	8	12	4.76	11°							7815051	7816051	
RPMT1204M8EN-HR	8	12	4.76	11°									7824084	
③	RPHT1605MOFN-NM	8	16	5.56	11°	7811016								
	RPHW1605MOSN	8	16	5.56	11°		7825019				7812019			
	RPHW1605MOEN	8	16	5.56	11°			7814019						
	RPHT1605MOEN-GL	8	16	5.56	11°				7826014	7813014				
	RPHT1605MOEN-SM	4	16	5.56	11°							7815015*		
RPHT1605M8EN-SM	8	16	5.56	11°							7815052	7816052		

\*标记的产品库存为零时, 产品废番。 \* Marked insert will be discontinued when it is out of stock.

### Accessories

#### 零件 Accessories

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts	适用刀具 Applicable Cutters
 固定螺丝 Clamping Screw	7808116	FS30573A (Torx 10)	① RPH*10...	PRC SS/SF $\phi 20 \sim 40$
	7808112	FS35586 (Torx 15)	② RPH*12...	PRC SS/SF $\phi 32 \sim 50$ PRC BORE $\phi 50 \sim 100$
	7808113	FS45510 (Torx 20)	③ RPH*16...	PRC SS/SF $\phi 40 \sim 63$ PRC BORE $\phi 50 \sim 100$
 高强度螺栓 Power Screw	7808151	PS1031 (M10x31)	③ RPH*16...	PRC BORE $\phi 50$

	商品号 EDP No.	名称 Designation	适用刀片 Applicable Inserts	适用刀具 Applicable Cutters
 扳手 Wrench	7808207	T10-D (Torx 10)	① RPH*10...	PRC SS/SF $\phi 20 \sim 40$
	7808208	T15-D (Torx 15)	② RPH*12...	PRC SS/SF $\phi 32 \sim 50$ PRC BORE $\phi 50 \sim 100$
	7808209	T20-D (Torx 20)	③ RPH*16...	PRC SS/SF $\phi 40 \sim 63$ PRC BORE $\phi 50 \sim 100$

扳手请另购。 The wrenches are sold separately from the cutters.

### 加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材质 Best  
○第二推荐材质 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
CK010	NM	有 Wet				◎		
XC3030	- GL GM	无 Dry	◎		○			
		有 Wet	◎	○	○			
XP3035	- GL GM	无 Dry	◎	○	○			
XP2025	GL	有 Wet	○	◎			○	
		无 Dry	○	○			○	
XP2040	GL	有 Wet	○	◎			○	
		无 Dry	○	○			○	
XG1015	-	无 Dry			◎			
XC5035	SM	无 Dry		◎				
		有 Wet		○			○	
XC5040	SM	有 Wet		○			◎	
		无 Dry		○			◎	
XP6015	HR	无 Dry	○		○			◎


NM: 铝合金用 GL: 轻·中切削用 GM: 中切削用 HR: 高硬度钢用 SM: 耐热合金用  
NM: Aluminum Alloy GL: Light·Middle Cutting GM: Middle Cutting HR: High Hardened Steel SM: Heat Resistance Alloy

# Cutting Conditions

### 切削条件基准表 Cutting Conditions

加工材料 Work Material	抗拉强度·硬度 Tensile Strength·Hardness	切削速度 VC (m/min) Cutting Speed	刀片尺寸 Insert Size					
			RPH*10...		RPH*12...		RPH*16...	
			每刃进给量 fz (mm/t) Feed per Tooth	切削深度 ap (mm) Depth of Cut	每刃进给量 fz (mm/t) Feed per Tooth	切削深度 ap (mm) Depth of Cut	每刃进给量 fz (mm/t) Feed per Tooth	切削深度 ap (mm) Depth of Cut
P 软钢、低碳钢 Mild Steel, Carbon Steel (SS400, S10C)	~180HB	200 (100 ~ 300)	0.25 (0.1 ~ 0.35)	2	0.3 (0.1 ~ 0.4)	2.4	0.35 (0.1 ~ 0.5)	3.2
	~280HB 碳素钢、合金钢 Carbon Steel, Alloy Steel (S50C, SCM440)	180 (100 ~ 250)	0.2 (0.1 ~ 0.3)	2	0.25 (0.1 ~ 0.35)	2.4	0.3 (0.1 ~ 0.45)	3.2
		~280HB 模具钢 Die Steel (SKD11, SKD61)	150 (80 ~ 200)	0.2 (0.1 ~ 0.3)	2	0.25 (0.1 ~ 0.35)	2.4	0.3 (0.1 ~ 0.45)
M 不锈钢(干式) Stainless Steel (Dry) (SUS304, SUS420)	~250HB	160 (80 ~ 200)	0.25 (0.1 ~ 0.35)	2	0.3 (0.1 ~ 0.4)	2.4	0.35 (0.1 ~ 0.5)	3.2
	~250HB 不锈钢(湿式) Stainless Steel (Wet) (SUS304, SUS420)	120 (60 ~ 180)	0.25 (0.1 ~ 0.35)	2	0.3 (0.1 ~ 0.4)	2.4	0.35 (0.1 ~ 0.5)	3.2
K 铸铁 Cast Iron (FC250)	~350N/mm <sup>2</sup>	220 (100 ~ 350)	0.25 (0.05 ~ 0.4)	2	0.3 (0.1 ~ 0.5)	2.4	0.35 (0.1 ~ 0.6)	3.2
	~800N/mm <sup>2</sup> 球墨铸铁 Ductile Cast Iron (FCD400)	150 (100 ~ 220)	0.2 (0.1 ~ 0.3)	2	0.25 (0.1 ~ 0.35)	2.4	0.3 (0.1 ~ 0.45)	3.2
N 铝合金 Aluminum Alloy	~13%Si	600 (300 ~ 1,500)	0.4 (0.2 ~ 0.8)	2	0.6 (0.2 ~ 1)	2.4	0.8 (0.3 ~ 1.5)	3.2
S 超耐热合金(湿式) Superalloy (Wet) (Inconel 718)	-	40 (25 ~ 60)	0.15 (0.05 ~ 0.25)	2	0.2 (0.05 ~ 0.3)	2.4	0.25 (0.05 ~ 0.4)	3.2
	- 钛合金(湿式) Titanium Alloy (Wet) (Ti-6Al-4V)	80 (50 ~ 120)	0.2 (0.1 ~ 0.3)	2	0.25 (0.1 ~ 0.35)	2.4	0.3 (0.1 ~ 0.45)	3.2
H 预硬钢 Pre-hardened Steel (NAK80)	40~43HRC	120 (40 ~ 150)	0.15 (0.05 ~ 0.25)	1.5	0.2 (0.05 ~ 0.3)	1.5	0.25 (0.05 ~ 0.4)	1.5
	43~48HRC 铸件用钢 Steel for Die Casting (DAC-MAGIC, DH31)	80 (40 ~ 120)	0.15 (0.05 ~ 0.25)	1	0.2 (0.05 ~ 0.3)	1	0.25 (0.05 ~ 0.4)	1
	50~55HRC 调质钢 Hardened Steel (SKD11)	60 (30 ~ 90)	0.15 (0.05 ~ 0.25)	0.5	0.2 (0.05 ~ 0.3)	0.5	0.25 (0.05 ~ 0.4)	0.5

- 上述参数表仅适合短柄型。
- 上述推荐数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。
- Above recommended speed is for Short Shank Type.
- The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.

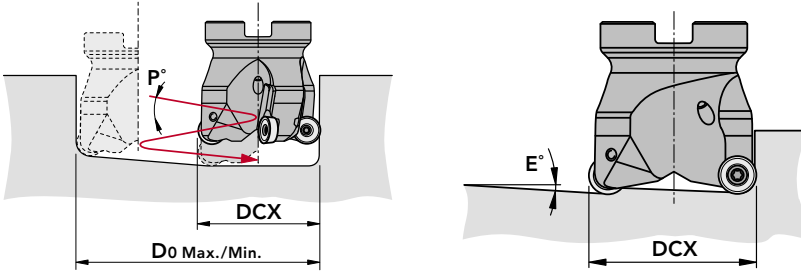

# Maximum Ramping Angle (E)

■ 斜线加工时的最大倾斜角 (E) Maximum Ramping Angle (E)

刀片尺寸 Insert Size	RPH#10...				RPH#12...				RPH#16...			
	倾斜角 Ramping Angle E°	螺旋线开孔 Helical Milling (mm)		螺旋角度 Helical Angle P°	倾斜角 Ramping Angle E°	螺旋线开孔 Helical Milling (mm)		螺旋角度 Helical Angle P°	倾斜角 Ramping Angle E°	螺旋线开孔 Helical Milling (mm)		螺旋角度 Helical Angle P°
		最小径 Do Min.	最大径 Do Max.			最小径 Do Min.	最大径 Do Max.			最小径 Do Min.	最大径 Do Max.	
20	1.3	26	30	1.3	-	-	-	-	-	-	-	-
24	-	-	-	-	6.0	30	36	2.2	-	-	-	-
25	2.0	37	40	1.8	-	-	-	-	-	-	-	-
30	2.5	46	50	1.6	5.3	42	48	1.9	-	-	-	-
32	3.0	50	54	1.5	4.0	46	52	1.7	7.0	39	48	2.1
40	-	-	-	-	2.8	62	68	1.4	4.8	55	64	1.8
50	-	-	-	-	2.6	81	88	1.1	4.0	75	84	1.5
63	-	-	-	-	1.9	107	114	0.9	2.8	101	110	1.1
80	-	-	-	-	1.3	142	148	0.7	2.0	135	144	0.9
100	-	-	-	-	1.0	181	188	0.5	1.5	175	184	0.7

# Cutting Data


加工数据 Cutting Data

## Inconel 718 (45HRC) 的长寿命加工 Long-life milling of Inconel 718 (45HRC)


使用工具 Tool	PRC12R050M22-5 ( $\phi 50 \times 5$ 刃)	其他公司 Competitor
使用刀片 (材质) Insert (grade)	RPHT1204MOEN-SM (XC5035)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	Inconel 718 (45HRC)	
切削速度 Cutting Speed	40m/min (255min <sup>-1</sup> )	60m/min (382min <sup>-1</sup> )
进给速度 Feed	270mm/min (0.21mm/t)	270mm/min (0.14mm/t)
切削深度 Depth of Cut	ap=0.5mm ae=30mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心 (BT50) Horizontal Machining Center	
耐久度 Durability	10m	2m

其他公司产品加工2m后, 磨损较大, 且刀片的其他刃角无法使用。与之相较, PRC 可加工10m, 大大提升了使用寿命。

The competitor's tool broke extensively after milling 2m, and the damage extended to other corners, rendering the tool unusable. In contrast, the PRC was able to mill 10m, resulting in a considerably longer tool life.

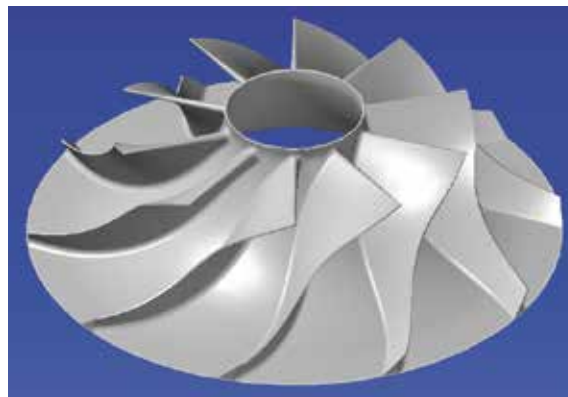


加工2m后的照片 After 2m of milling

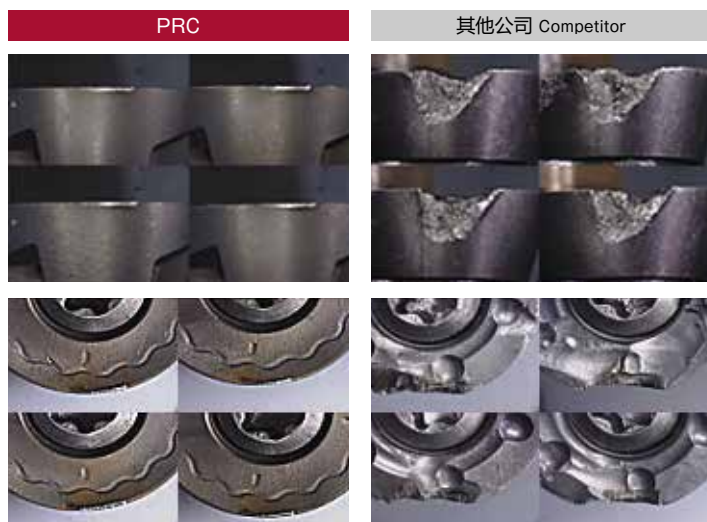

## SUS304加工的长寿命化 Long tool life in SUS304

使用工具 Tool	PRC12R040SS32-3S ( $\phi 40 \times 3$ 刃)	其他公司 Competitor
使用刀片 (材质) Insert (grade)	RPHT1204MOEN-GL (XP2025)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SUS304	
切削速度 Cutting Speed	120m/min (955min <sup>-1</sup> )	
进给速度 Feed	860mm/min (0.3mm/t)	
切削深度 Depth of Cut	ap=3mm ae=24mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心 (BT50) Horizontal Machining Center	

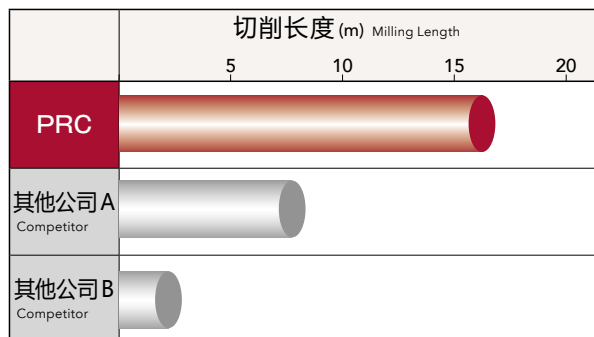

以往的产品较早出现崩刃、磨损, 使用寿命不稳定。而 PRC (XP2025) 无崩刃等现象, 可稳定加工, 延长使用寿命。


The PRC (XP2025) is able to achieve stable, chipping-free machining whereas the competitor tools had failed due to early chipping and wear.

# Cutting Data

加工数据 Cutting Data

## 零部件的粗加工(工具奥运会) Rough milling of parts (Tool Olympics)

使用工具 Tool	PRC12R040SS32-3S ( $\phi 40 \times 3$ 刃)	其他公司 A、B Competitor
使用刀片(材质) Insert (grade)	RPHW1204MOSN(XC1015)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	FC250	
切削速度 Cutting Speed	180m/min (1,433min <sup>-1</sup> )	
进给速度 Feed	2,300mm/min (0.5mm/t)	
切削深度 Depth of Cut	ap=3mm ae=25mm	
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center	

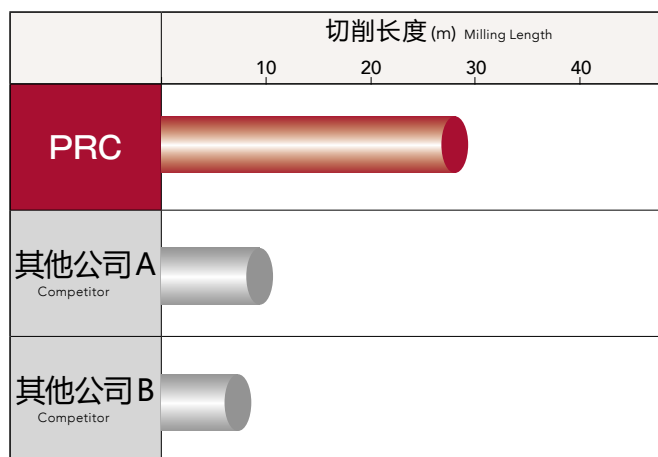

各个公司针对零部件粗加工的比较结果。由于刚性好，耐磨损性好，我们的刀片是其他公司耐久性的3倍。


Each company's products were compared in the rough milling of parts. Having higher rigidity and wear resistance, our inserts provided three times the durability versus competitors'.

加工29m 后的刀片照片 After 29m of milling



## 叶片粗加工 Rough milling of blade

使用工具 Tool	PRC10R032SS32-4S ( $\phi 32 \times 4$ 刃)	其他公司 Competitor
使用刀片(材质) Insert (grade)	RPHT10T3MOEN-SM(XC5035)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	13Cr相等物 Equivalent	
切削速度 Cutting Speed	90m/min (896min <sup>-1</sup> )	
进给速度 Feed	1,100mm/min (0.3mm/t)	
切削深度 Depth of Cut	ap=0.5mm ae=22mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心(BT40) Horizontal Machining Center	

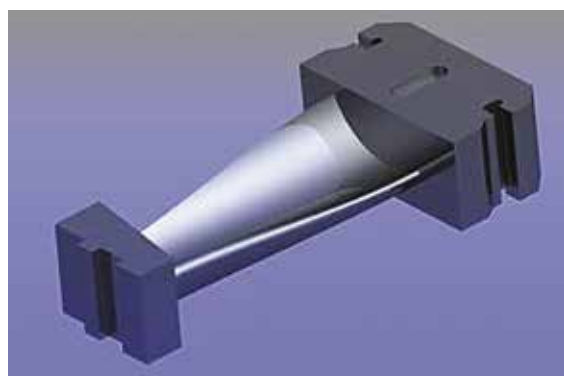

叶片粗加工，可以实现耐久性1.5倍的稳定加工。


In the rough milling with PRC, blade in a stable manner and durability was increased by 1.5 times versus the competition.

## 零部件的粗加工(工具奥运会) Rough milling of parts (Tool Olympics)

使用工具 Tool	PRC12R050M22-5 ( $\phi 50 \times 5$ 刃)	其他公司A、B、C、D Competitor
使用刀片(材质) Insert (grade)	RPHT1204MOEN-GL (XP2040)	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	SUS304	
切削速度 Cutting Speed	100m/min (637min <sup>-1</sup> )	
进给速度 Feed	800mm/min (0.25mm/t)	
切削深度 Depth of Cut	ap=1mm ae=25mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center	

各个公司针对零部件粗加工的比较结果。其他公司的刀具过早的崩刃及折损了，但是PRC仍然是正常磨损状态，与其他公司A相比，耐久性为他们产品的1.7倍以上。

Each company's products were compared in the rough milling of parts. Competitors' tools resulted in premature chipping and breakage, but the PRC wore normally, resulting in 1.7 times the durability versus Competitors.

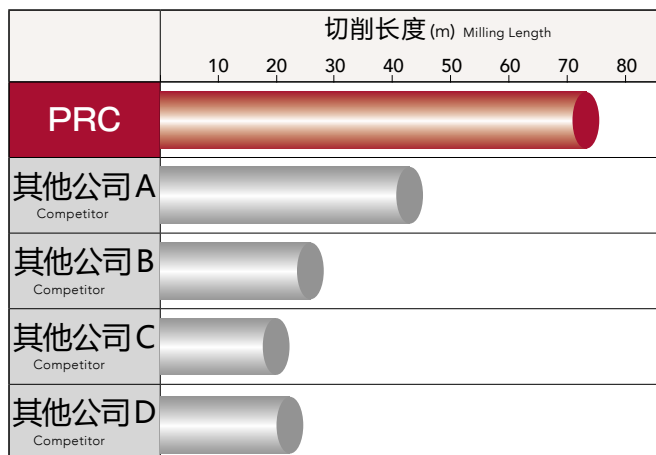

加工67.2m后的刀片照片 After 67.2m of milling



# » Phoenix PDR

高进给圆弧角铣刀系列  
High Feed Radius Cutter Series

Phoenix Deep feed Radius



## ■ 解决以往的加工问题

Solves traditional machining problems

### 以往的高效率工具的问题点

Issues with traditional high-efficiency cutting tools

- 没有能够大切深加工的圆弧角铣刀  
There is not enough radius tool that can perform large depths of cut.
- 外皮的切削量大，因此导致工具的破损  
Large variances in removal damage the tool.
- 黑皮部分的切深量很少，因此导致空切的情况增加  
The depth of cut is so small for black surface areas that air cutting becomes common.



保证切深量的同时，不降低效率

More cutting depth is needed without dropping the efficiency...

低切深量高进给刀圆弧角形粗加工工具  
Leading low depth of cut, high feed radius roughing tools.

### 考虑到刀尖刚性的可变动负角形状

Variable negative form for edge rigidity

→防止崩刃

→prevent breakage

### 螺旋刃形

Spiral tool form

→降低切削抵抗

→reducte cutting force



### 可用于精加工的副切削刃

A cutting tool capable of finish milling, thanks to the wiping edge

### 切深量2-5mm 时为最适合的刀片形状(圆弧角R10)

Ideal insert formation for depth of cut between 2-5mm (corner radius 10)

### 对应侧面加工的刃形

A cutting tool capable of side machining


### 采用双重装夹

Uses double clamping

### 底部内凹形状(3.5mm)

针对粗糙的铸件表面  
Bottom relief (3.5mm) prevents rough surfaces

由于刀架的增大，提高了刀体的刚性  
Body rigidity has been increased because of the enlarged back metal

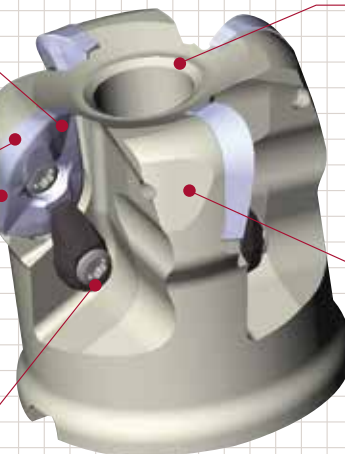


## ■ 用圆弧角铣刀来替代球头铣刀加工!

The work of a ball, cut by a radius!

一直被认为只能使用球头型铣刀的加工，PDR 的话也能进行。

The PDR can cut which was considered the work of ball end mills until now.


进行等高线加工时，随着切深量的增大，加工出的高低差异随之变大。一般来说，对于后工序工具的影响较大，最终加工工程间的总加工时间会增多。但是 PDR 采用球头铣刀相同作用的刃型设计，仍然保持着圆弧角的有效工具刚性，能进行走直线加工。等高线粗加工时，限于 ap3mm 以下。建议使用直径 φ50 以下。

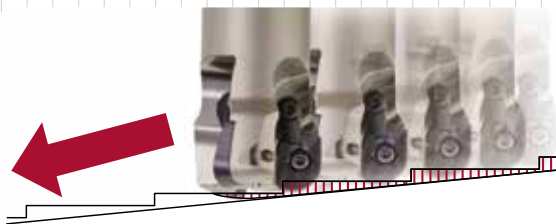

In heavy roughing (contoured machining), machining steps become larger based on the depth of cut. Usually, the effect on the next cutting tool is great, and as machining processes are added, the overall production time increases. However, the tool form of the PDR is designed to increase the removal and leave stepovers similar to ball end mills while still maintaining the rigidity of a radius end mill. Roughing of contoured lines is restricted to ap3mm. Also, a diameter of φ50 or less is recommended.




高进给圆弧角铣刀 柄型  
High Feed Radius Cutter with Shank Type

## PDR SS/MT/CN

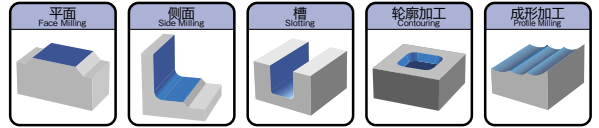

# Specification

形状尺寸表 Specification

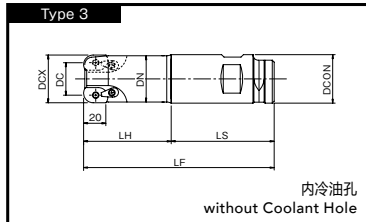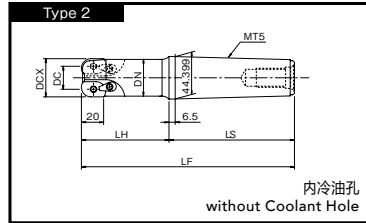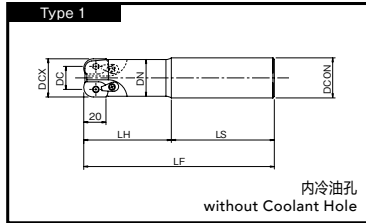

单位:mm Unit:mm


商品号 EDP No.	名称 Designation	刀具 外径 DCX	外径 DC	刃数 ZEPF	柄径 DCON	全长 LF	颈长 LH	颈径 DN	柄长 LS	重量 (kg)	形状 类型 Type
7800000	PDR20R040SS42-2S	40	20	2	42	150	50	38.9	100	1.46	1
7800001	PDR20R040MT5M16-2S	40	20	2	MT5-M16	256	120	38.9	136	2.48	2
7800003	PDR20R040MT5M24-2S	40	20	2	MT5-M24	256	120	38.9	136	2.30	2
7800009	PDR20R040SS42-2L	40	20	2	42	250	150	38.9	100	2.44	1
7800010	PDR20R040MT5M16-2L	40	20	2	MT5-M16	306	170	38.9	136	2.97	2
7800012	PDR20R040MT5M24-2L	40	20	2	MT5-M24	306	170	38.9	136	2.82	2
7800004	PDR20R050SS42-3S	50	30	3	42	150	50	48.5	100	1.55	1
7800008	PDR20R050CN50.8-3S	50	30	3	CN50.8	150	65	48.5	85	2.05	3
7800005	PDR20R050MT5M16-3S	50	30	3	MT5-M16	256	120	48.5	136	2.92	2
7800007	PDR20R050MT5M24-3S	50	30	3	MT5-M24	256	120	48.5	136	2.71	2
7800013	PDR20R050SS42-3L	50	30	3	42	250	150	48.5	100	3.03	1
7800017	PDR20R050CN50.8-3L	50	30	3	CN50.8	250	165	48.5	85	3.50	3
7800014	PDR20R050MT5M16-3L	50	30	3	MT5-M16	306	170	48.5	136	3.63	2
7800016	PDR20R050MT5M24-3L	50	30	3	MT5-M24	306	170	48.5	136	3.49	2

库存种类都为○(即标准库存品)。 Stock are categorized as ○( Standard stock item).

# Phoenix


高进给圆弧角铣刀 刀盘型  
High Feed Radius Cutter with Bore Type

## PDR BORE

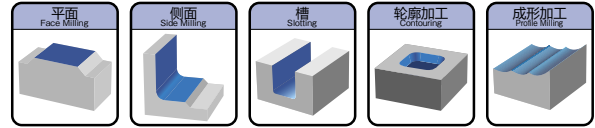

## Specification


■形状尺寸表 Specification

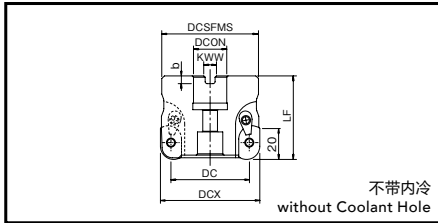

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	刀具外径 DCX	外径 DC	刃数 ZEPF	刀具高度 LF	刀盘径 DCSFMS	孔径 DCON	端面键槽 Key Slot		重量 (kg)
								宽度 kww	深度 b	
7800057	PDR20R063M22-3	63	43	3	63	60	22	10.4	6.3	0.97
7800050	PDR20R063M22.2-3	63	43	3	63	60	22.225	8	5	0.97
7800058	PDR20R063M22-4	63	43	4	63	60	22	10.4	6.3	0.88
7800051	PDR20R063M22.2-4	63	43	4	63	60	22.225	8	5	0.88
7800059	PDR20R080M27-4	80	60	4	63	76	27	12.4	7	1.60
7800052	PDR20R080M31.7-4	80	60	4	63	76	31.75	12.7	8	1.49
7800060	PDR20R080M27-5	80	60	5	63	76	27	12.4	7	1.51
7800053	PDR20R080M31.7-5	80	60	5	63	76	31.75	12.7	8	1.39
7800054	PDR20R100M31.7-5	100	80	5	63	96	31.75	12.7	8	2.55
7800061	PDR20R100M32-5	100	80	5	63	96	32	14.4	8	2.56
7800055	PDR20R100M31.7-6	100	80	6	63	96	31.75	12.7	8	2.46
7800062	PDR20R100M32-6	100	80	6	63	96	32	14.4	8	2.46
7800056	PDR20R125M31.7-6	125	105	6	63	100	31.75	12.7	8	3.78
7800063	PDR20R125M40-6	125	105	6	63	100	40	16.4	9	3.58

## Inserts

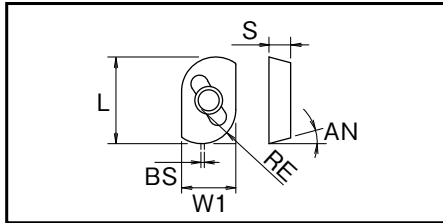

### ■ 适用刀片 Inserts

单位:mm Unit:mm

名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size					涂层种类 Grade of Coated Materials
		LxW1	厚度 S	后角 AN	RE	副切削刃 BS	
ADMT2006100PDR-GM	2	24.18x16	6.35	15°	10	1	XP3930 7810000

## Accessories

### ■ 零件 Accessories

	商品号 EDP No.	名称 Designation
固定螺丝 Clamping Screw	7808001	CSPB-5 (Torx 20IP)
压板 (压板、刀垫、固定螺丝) Clamping set (clamp, washer, and clamping screw)	7808002	CSY-20

	商品号 EDP No.	名称 Designation
T型扳手 T-Wrench	7808000	20IP-T

扳手请另购。 The wrenches are sold separately from the cutters.

# Phoenix

高进给圆弧角铣刀系列  
High Feed Radius Cutter Series

## PDR

### 加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材质 Best  
○第二推荐材质 Good

刀片材质 Insert Grades	断屑槽 Insert Breaker	切削油剂 Coolant	P	M	K	N	S	H
XP3930	GM	無 Dry	◎		◎			


GM: 通用 GM: General use

## Cutting Conditions

### 切削条件基准表 Cutting Conditions

加工材料 Work Material	抗拉强度·硬度 Tensile Strength· Hardness	切削速度 Vc (m/min) Cutting Speed	PDR SS/MT/CN			PDR BORE				
			每刃进给量 fz (mm/t) Feed per Tooth	切削深度 ap (mm) Depth of Cut		每刃进给量 fz (mm/t) Feed per Tooth	切削深度 ap (mm) Depth of Cut			
				120	170		100	200	300	400
P 软钢、低碳素钢 Mild Steel, Low Carbon Steel (SS400, S10C) 碳素钢、合金钢 Carbon Steel, Alloy Steel (S50C, SCM440) 模具钢 Die Steel (SKD11, SKD61)	~180HB	180( 90 ~ 220)	0.7( 0.3 ~ 1)	3	2	0.6( 0.3 ~ 1)	3	3	2	2
	~280HB	180( 90 ~ 220)	0.7( 0.3 ~ 1)	3	2	0.6( 0.3 ~ 1)	3	3	2	2
	~280HB	150( 90 ~ 180)	0.6( 0.3 ~ 1)	3	2	0.5( 0.3 ~ 1)	3	2	2	2
K 铸铁 Cast Iron (FC250) 球墨铸铁 Ductile Cast Iron (FCD400)	~350N/mm <sup>2</sup>	180( 100 ~ 250)	0.8( 0.3 ~ 1.5)	3	3	0.7( 0.3 ~ 1.5)	3	3	2	2
	~800N/mm <sup>2</sup>	150( 100 ~ 250)	0.7( 0.3 ~ 1.2)	3	3	0.6( 0.3 ~ 1.2)	3	3	2	2

·上述推荐数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。  
The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting condition.

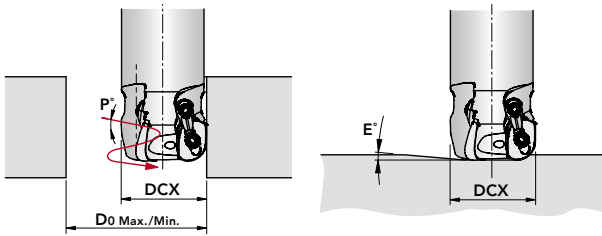

## Maximum Ramping Angle (E)

### 斜线加工时最大倾斜角(E) Maximum Ramping Angle (E)

刀具外径 (mm) DCX	倾斜角 Ramping Angle E°	螺旋线开孔 Helical Milling (mm)		螺旋角度 Helical Angle P°	轴进 力量 Plunging (mm)
		最小径 Do Min.	最大径 Do Max.		
40	5	50	78	1.4	3
50	3	70	98	1.1	3
63	2	96	124	0.9	3
80	1	130	158	0.7	3
100	0.5	170	198	0.5	3
125	0.5	220	248	0.4	3

1. 切削初始会产生较长的切屑，请注意。
2. 进给速度设定为基准条件表的40~70%。
3. 角度1°以下时可不用降低进给速度进行加工。
4. 推荐使用气冷。
1. Long chips may occur in the beginning of the milling process.
2. Feed rate should be set within 40-70% of the recommended milling condition.
3. To advance without dropping the feed rate, set an angle of less than 1°.
4. Using air blow is highly recommended.

# Cutting Data

加工数据 Cutting Data

## 刀尖刚性与锋利性并存的刃形设计 Cutting edge is designed for both rigidity and sharpness



使用工具 Tool	PDR20R050MT5M16-3L ( $\phi 50 \times 3$ 刃)
使用刀片(材质) Insert (grade)	ADMT2006100PDR-GM (XP3930)
加工材料 Work Material	FC250
切削速度 Cutting Speed	150m/min (955min <sup>-1</sup> )
进给速度 Feed	1,500mm/min (0.52mm/t)
切削深度 Depth of Cut	$a_p=3\text{mm}$ $a_e=25\text{mm}$
切削油剂 Coolant	无(气冷式) Air Blow
使用机械 Machine	立式加工中心(8.5/11kW) Vertical Machining Center

(单位: N) (unit: N)

	x 进给力 Feed force	y 主切削力 Principal cutting force	z 推力 Thrust force	合力 Resultant force
<b>PDR</b>	1651	2082	1433	3019
其他公司(有断屑槽) Competitor (with breaker)	1725	2095	1455	3079

采用强化刃形, 合力与断屑槽(效果)相同!

With the strengthened cutting edge, resultant force is as with a breaker!

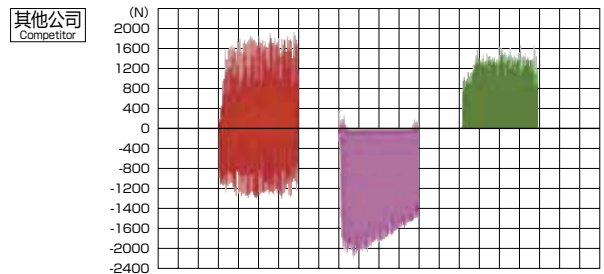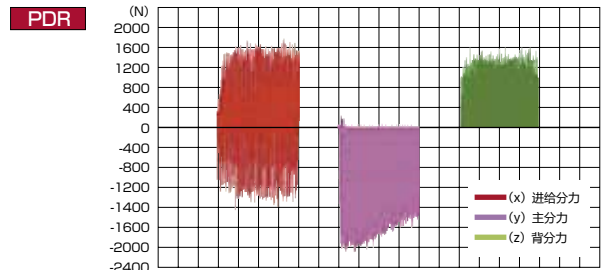

## 为了有效利用机器主轴用电机(输出)... Using the spindle load meter more effectively


切削速度 Cutting Speed	150m/min
切削深度 Depth of Cut	$a_p=3\text{mm}$ $a_e=(D_c-20)+5$ (切深量3mm刀具直径) Tool diameter for 3mm cut depth

**PDR 推荐使用 2 ~ 5mm 的切深量。**  
这跟机械主轴用电机(输出)有很大关系。  
所以请根据电机的马来来决定刀具直径和加工条件。

For PDR, a 2-5mm of depth of cut is recommended. This is largely related to the spindle load meter. Please select the tool diameter and cutting conditions that are suited to your spindle load meter.


### FC250 机械主轴用电机(输出)表

Spindle load meter reference table

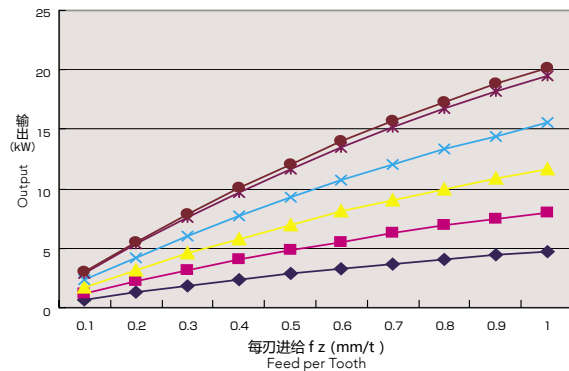

### S50C 机械主轴用电机(输出)表

Spindle load meter reference table

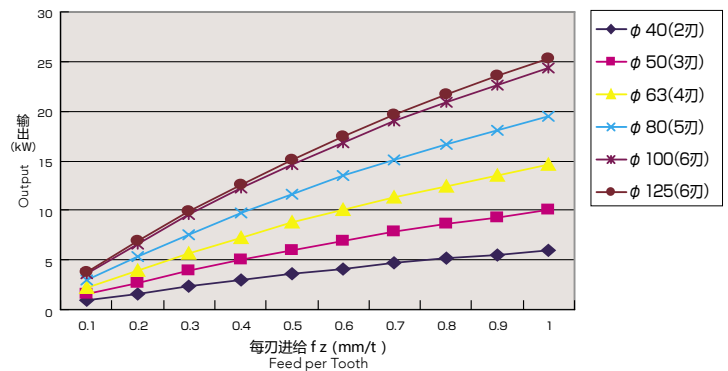


# Cutting Data

加工数据 Cutting Data

提高加工效率 + 长寿命的达成 Achieving efficient machining and longer tool life

使用工具 Tool	PDR20R050MT5M24-3S ( $\phi 50 \times 3$ 刃)
使用刀片(材质) Insert (grade)	ADMT2006100PDR-GM (XP3930)
加工材料 Work Material	FC250
加工工件 Work	冲压模具 Press Dies
切削速度 Cutting Speed	150m/min (955min <sup>-1</sup> )
进给速度 Feed	2,000mm/min (0.7mm/t)
切削深度 Depth of Cut	$a_p=3\text{mm}$ $a_e=30\text{mm}$
切削油剂 Coolant	无(气冷式) Air Blow
使用机械 Machine	龙门加工中心(18.5/22kW) Double Column Machining Center
耐久度时间 Durability	4小时 Hours

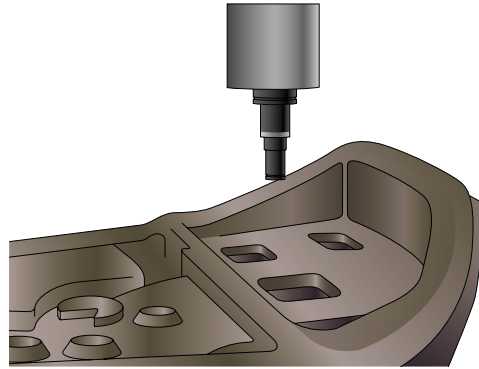


效率是球头铣刀的2倍，主轴负荷值降低。主轴最大负荷55%。

While efficiency is twice as great as ball end mills, spindle loads are also reduced! The maximum spindle load is 55%.

高效率加工的实现 Highly efficient machining

使用工具 Tool	PDR20R040MT5M24-2S ( $\phi 40 \times 2$ 刃)
使用刀片(材质) Insert (grade)	ADMT2006100PDR-GM (XP3930)
加工材料 Work Material	高强度铸铁 Meehanite Cast Iron
加工工件 Work	冲压模具 Press Dies
切削速度 Cutting Speed	170m/min (1,350min <sup>-1</sup> )
进给速度 Feed	2,430mm/min (0.9mm/t)
切削深度 Depth of Cut	$a_p=3\text{mm}$ $a_e=20\text{mm}$
切削油剂 Coolant	无(气冷式) Air Blow
使用机械 Machine	龙门加工中心(18.5/22kW) Double Column Machining Center
加工时间 Machining Time	4时间 Hours

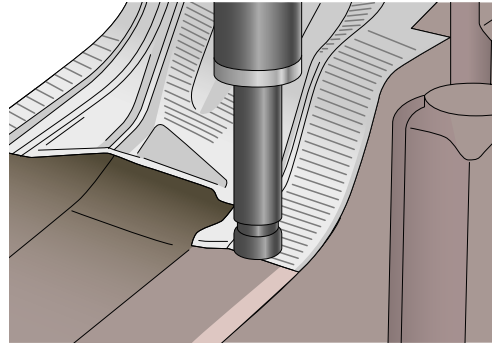

其他公司刀具的进给速度为1,500mm/min。PDR 加工4小时后，工具没有损伤，仍可继续稳定加工。


The feed rate was 1,500mm/min for the competitor's tool. The machining time of PDR was 4 hours with stable machining without tool damage.

切深量增大，效率提高 Increased efficiency by the depth of cut increases

使用工具 Tool	PDR20R050SS42-3S ( $\phi 50 \times 3$ 刀)
使用刀片(材质) Insert (grade)	ADMT2006100PDR-GM (XP3930)
加工材料 Work Material	S50C
加工工件 Work	树脂模具 Plastic Dies
切削速度 Cutting Speed	150m/min (955min <sup>-1</sup> )
进给速度 Feed	3,000mm/min (1mm/t)
切削深度 Depth of Cut	$a_p=3\text{mm}$ $a_e=30\text{mm}$
刀具悬伸 Overhang Length	100mm
切削油剂 Coolant	无(气冷式) Air Blow
使用机械 Machine	卧式加工中心(37/45kW) Horizontal Machining Center
加工时间 Machining Time	2小时 Hours

与现有工具相比，效率为1.5倍。

Efficiency was improved 1.5 times compared to current tools.

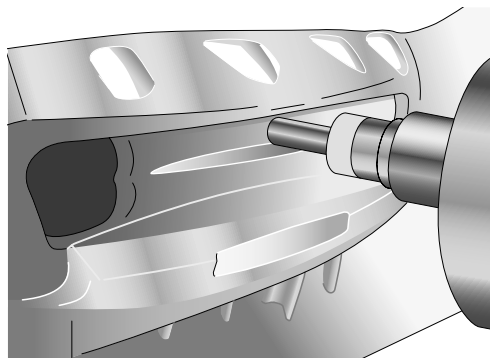

# » Phoenix PFAL

铝材用精加工铣刀  
Finishing Cutter for Aluminum

Phoenix Finishing Cutter for Aluminum



## ■ 铝制刀体实现惊人的轻量化 →即使是小型加工中心也能使用的丰富的产品尺寸

Incredibly Lightweight with Aluminum Body Construction

→ Broad size lineup to accommodate various cutting environment, even small machining centers.

### 高平衡性 Excellent Balance

- 实现高速回转加工
- 刀体(安装刀片) 保证平衡精度等级G6.3  
Enables high-speed milling  
Cutter (with blades mounted) with guaranteed balancing grade to G6.3

### 高效率 High Efficiency

- 多刃式样配合采用修光刃的标准刀片即使是在高进给的加工下也能获得良好的精加工面  
Excellent surface finish even in high-feed milling with adoption of multiple blades and wiper blade standardization



### 高平衡精度 High Precision Balancing

- 刀体在刀座上装夹状态也能保证高平衡精度  
High precision balancing can be performed even when cutter is mounted onto the arbor

### PCD 一体式的刀片

PCD Integrated Blades

- 可再研磨  
最大化性价比  
PCD can be reground for maximum cost performance

## ■ 在BT30上可以使用φ160 的PFAL PFAL φ160 with BT30

φ160 的标准内径为φ25.4、27

Bore diameters of φ25.4 and 27 are standard offering in the PFAL φ160 cutter lineup.



面铣芯轴 Face Mill Arbor  
BT30-FMA25.4-45  
重量 0.90kg  
Weight

+

PFAL φ160 刃数(z) 20  
PFAL04R160M25.4-20  
重量 1.98kg  
Weight

= 总重量  
Total Weight  
2.88kg

加工情报请参考P.155。 Please see p.155 for cutting data.

# Features

■特点 Features

## ■零件数少, 方便刀具管理及装卸

Few Required Components Makes Easy Setup and Simple Tool Management

### ○采用标准PCD 修光刃刀片 Standardized Wiper Blade



修光刃刀片安装标识  
Wiper Blade Position Indicator

修光刃确认标识  
Wiper Blade Indicator

### 修光刃刀片 Wiper Blade

- 实现优良的加工面粗度  
Enables superior surface finish
- 每把刀体一枚, 在有安装标识处装卸  
One wiper blade per cutter body; for mounting in the designated position
- 刀片上也有修光刃确认标识  
Wiper blade also comes with identifiable indicator



### 普通刀片 Normal Blade

- 多刃设计能稳定加工  
Enables stable milling with multiple blades configuration
- 在安装标识以外的都用一般刀片装夹  
For mounting in any cutter body slots with exception of wiper blade position

### ○采用所有刀体通用的零件 Spare Parts Compatible with All Cutter Sizes



刀片用紧固螺丝  
Clamping Screw for Blade



楔子  
Wedge



楔用紧固螺丝  
Clamping Screw for Wedge

- 大尺寸的紧固螺丝(M6) 提升刚性  
Improved rigidity with large size clamping screw (M6)
- 简易的刃尖调整缩短装卸时间  
Easy cutting edge adjustment reduces required setup time

刃尖高度调整顺序请参照P.157、P.158。  
Please see p.157 and p.158 for cutting edge height adjustment instructions.


## ■主要零部件案例 PFAL Component Solution Examples

### 汽车铝制零部件

Aluminum Components in Automotive



- 离合器壳  
Clutch Housing
- 变速箱体  
Transmission Case
- 缸盖  
Cylinder Head
- 缸体  
Cylinder Block
- 其他所有铝制零部件  
And more





# Specification

■ 形状尺寸表 Specification

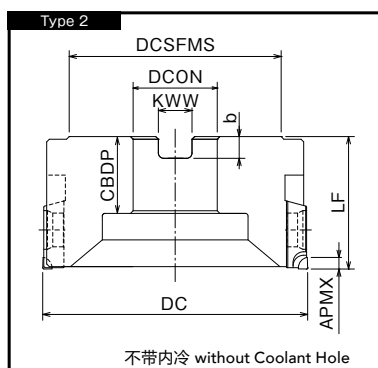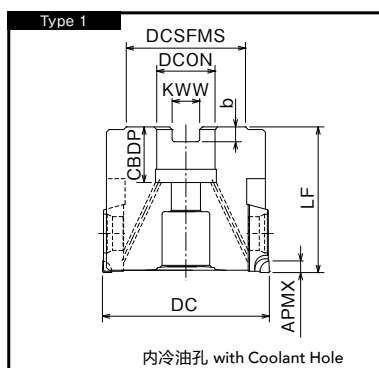

Type2: 使用内冷型时, 请使用市面上带内冷油孔的紧固螺栓。

For the use of internal coolant, please use a clamping bolt with coolant holes sold in the market.

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEPF	刀具高度 LF	安装 孔高度 CDBP	刀盘径 DCSFMS	孔径 DCON	端面键槽 Key Slot		最大转速 RPMX (min <sup>-1</sup> )	重量 Weight (kg)	形状 类型 Type
								宽度 KWW	深度 b			
7803600	PFAL04R050M16-5	50	5	55	20	40	16	8.4	5.6	32,000	0.27	1
7803601	PFAL04R063M22-6	63	6	55	21	45	22	10.4	6.3	25,000	0.40	1
7803602	PFAL04R063M22-8	63	8	55	21	45	22	10.4	6.3	25,000	0.43	1
7803603	PFAL04R080M25.4-8	80	8	50	28	70	25.4	9.5	6	19,800	0.53	2
7803604	PFAL04R080M27-8	80	8	50	28	70	27	12.4	7	19,800	0.52	2
7803605	PFAL04R080M25.4-10	80	10	50	28	70	25.4	9.5	6	19,800	0.55	2
7803606	PFAL04R080M27-10	80	10	50	28	70	27	12.4	7	19,800	0.54	2
7803607	PFAL04R100M25.4-8	100	8	50	28	80	25.4	9.5	6	15,800	0.86	2
7803608	PFAL04R100M27-8	100	8	50	28	80	27	12.4	7	15,800	0.83	2
7803609	PFAL04R100M31.7-8	100	8	50	32	80	31.75	12.7	8	15,800	0.86	2
7803610	PFAL04R100M32-8	100	8	50	28	80	32	14.4	8.2	15,800	0.78	2
7803611	PFAL04R100M25.4-12	100	12	50	28	80	25.4	9.5	6	15,800	0.90	2
7803612	PFAL04R100M27-12	100	12	50	28	80	27	12.4	7	15,800	0.87	2
7803613	PFAL04R100M31.7-12	100	12	50	32	80	31.75	12.7	8	15,800	0.90	2
7803614	PFAL04R100M32-12	100	12	50	28	80	32	14.4	8.2	15,800	0.82	2
7803615	PFAL04R125M25.4-10	125	10	50	28	80	25.4	9.5	6	12,600	1.35	2
7803616	PFAL04R125M27-10	125	10	50	28	80	27	12.4	7	12,600	1.33	2
7803617	PFAL04R125M38.1-10	125	10	63	36	80	38.1	15.9	10	12,600	1.30	2
7803618	PFAL04R125M40-10	125	10	63	30	85	40	16.4	9.2	12,600	1.26	2
7803619	PFAL04R125M25.4-16	125	16	50	27	80	25.4	9.5	6	12,600	1.42	2
7803620	PFAL04R125M27-16	125	16	50	28	80	27	12.4	7	12,600	1.41	2
7803621	PFAL04R125M38.1-16	125	16	63	36	80	38.1	15.9	10	12,600	1.38	2
7803622	PFAL04R125M40-16	125	16	63	30	85	40	16.4	9.2	12,600	1.33	2
7803623	PFAL04R160M25.4-12	160	12	50	28	80	25.4	9.5	6	10,000	1.98	2
7803624	PFAL04R160M27-12	160	12	50	28	80	27	12.4	7	10,000	1.98	2
7803625	PFAL04R160M40-12	160	12	63	30	85	40	16.4	9.2	10,000	2.10	2
7803626	PFAL04R160M50.8-12	160	12	63	38	100	50.8	19.1	11	10,000	2.15	2
7803629	PFAL04R160M25.4-20	160	20	50	28	80	25.4	9.5	6	10,000	1.98	2
7803630	PFAL04R160M27-20	160	20	50	28	80	27	12.4	7	10,000	1.98	2
7803627	PFAL04R160M40-20	160	20	63	30	85	40	16.4	9.2	10,000	2.20	2
7803628	PFAL04R160M50.8-20	160	20	63	38	100	50.8	19.1	11	10,000	2.24	2

· 请根据测定器来调整刃尖高度。

· 关于 APMX 请在刀片的 LE 栏进行确认。(p.154)

· 重量是安装刀片时的总重量。

Adjust cutting edge height with a tool presetter.


For APMX, please refer to the LE column of the blade table.(p.154)

The weight show on above is the total weight of cuttuer body with all baldes mounted.

# Blade

·修光刀片每把刀体一枚，请在安装标识部装卸。  
One wiper blade is required per cutter body and should be mounted in the designated position.  
·刀片(普通 / 修光刃)发注单位为1个。  
Order unit for blade (normal/wiper) = 1 piece


## ■普通刀片 Normal Blade

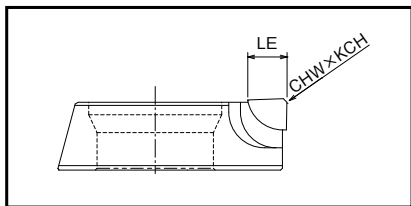

最适合铝制油口部分加工的切削刃长(ap) 6mm型也上线了。(FR1206)  
Blade with 6mm cutting edge width (FR1206) suitable for milling of aluminum pouring gates is also available.

名称 Designation	刀片尺寸 Blade Size			PCD 材质 PCD Grade
	切削刃数 Number of Cutting Edges	圆弧形 CHW×KCH	LE (mm)	
FR1204	1	0.4×45°	4	7820500
FR1206	1	0.4×45°	6	7820502

## ■修光刀片 Wiper Blade

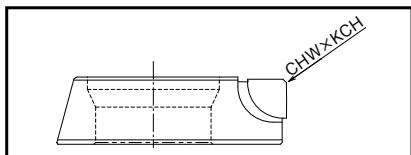

修光刀片(FR1204-W)可以通用在FR1204·FR1206。  
The FR1204-W wiper blade can be used with both the FR1204 and FR1206 normal blades.

名称 Designation	刀片尺寸 Blade Size		PCD 材质 PCD Grade
	切削刃数 Number of Cutting Edges	圆弧形 CHW×KCH	
FR1204-W	1	0.4×45°	7820501

# Accessories

## ■零件 Accessories

名称 Designation	商品号 EDP No.	名称 Designation
刀片用紧固螺丝 Clamping Screw for Blade	7808125	FS60620 (Torx25)
楔子 Wedge	7808143	W12-06
楔用紧固螺丝 Clamping Screw for Wedge	7808142	WS0617

名称 Designation	商品号 EDP No.	名称 Designation
T型扳手 (刀片用紧固螺丝用) T-Wrench (for blade clamp screw)	7808211	T25-T
L型扳手 (楔用紧固螺丝用) L-Wrench (for wedge screw)	7808231	3MM-L

所有零件(包括扳手)都与刀体配套。  
All accessories (including wrenches) come with the cutter body.

# Cutting Conditions

## ■切削条件基准表 Cutting Conditions

加工材料 Work Material	成分 Component	材质记号 Material Symbol	用途 Application	切削速度Vc(m/min) Cutting Speed		每刃进给量fz(mm/t) Feed per Tooth	切削深度ap(mm) Depth of Cut
				BT30	BT40, BT50 HSK-63		
Z 铝合金 Aluminum Alloy	~12% Si	A7075·A5052·A2017等 ADC12等 etc.	半精加工 Semi-finishing	1,000 (800~2,000)	2,000 (1,000~5,000)	0.08 (0.05 ~ 0.10)	1.5 (1.0 ~ 2.0)
			精加工 Finishing				
	13% Si ~	AC9A·AC9B等 etc.	半精加工 Semi-finishing	600 (400~800)	0.08 (0.05 ~ 0.10)	1.5 (1.0 ~ 2.0)	
			精加工 Finishing				0.06 (0.05 ~ 0.08)

库存种类都为○(即标准库存品)。Stock are categorized as ○(Standard stock item).

# Cutting Data

加工数据 Cutting Data

## BT30上使用φ160的刀具进行高效率加工 High efficiency milling on BT30 with PFAL φ160

使用工具 Tool	PFAL04R160M25.4-20 (φ160×20刃) Flutes	
用途 Application	半精加工 Semi-finishing	精加工 Finishing
加工材料 Work Material	ADC12	
切削速度 Cutting Speed	1,000m/min (2,000min <sup>-1</sup> )	2,000m/min (4,000min <sup>-1</sup> )
进给速度 Feed	3,200mm/min (0.08mm/t)	6,400mm/min (0.08mm/t)
切削深度 Depth of Cut	a <sub>p</sub> =2mm a <sub>e</sub> =100mm	a <sub>p</sub> =0.2mm a <sub>e</sub> =100mm
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	立式加工中心(BT30) Vertical Machining Center	
加工面粗度 Surface Roughness	Ra=0.25μm Rz=1.22μm	Ra=0.12μm Rz=0.96μm



使用大径刀具可以得到没有接缝的加工面。即使在BT30D小型加工中心上使用，无论半精加工还是精加工都能稳定加工并且加工面良好。

The use of a large-diameter cutter allows processing of a wide area in one pass with no overlap marks. Stable and high quality surface finish was achieved for semi-finishing and finishing even in small machining centers such as the BT30.

## 铝制零部件的高精度加工 High precision milling of aluminum component

使用工具 Tool	PFAL04R080M25.4-10 (φ80×10刃) Flutes	其他公司产品 (φ80×6刃) Competitor Flutes
加工材料 Work Material	ADC12	
切削速度 Cutting Speed	3,000m/min (12,000min <sup>-1</sup> )	
进给速度 Feed	14,400mm/min (0.12mm/t)	7,200mm/min (0.1mm/t)
切削深度 Depth of Cut	a <sub>p</sub> =0.5mm a <sub>e</sub> =53mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心(BT40) Horizontal Machining Center	




加工面粗度 Surface Roughness  
Ra=0.17 ~ 0.22μm Rz=1.08 ~ 1.24μm

使用多刃式样的刀具，加工效率可以翻倍，并且可以得到没有振动的良好加工面。

The PFAL cutter had doubled milling efficiency with no chattering, enabling an excellent surface finish.

## 铝制零部件的高效率·高精度加工 High efficiency and high precision milling of aluminum component

使用工具 Tool	PFAL04R063M22-6 (φ63×6刃) Flutes	
用途 Application	半精加工 Semi-finishing	精加工 Finishing
加工材料 Work Material	ADC12	
切削速度 Cutting Speed	1,000m/min (5,000min <sup>-1</sup> )	1,500m/min (7,500min <sup>-1</sup> )
进给速度 Feed	3,000mm/min (0.1mm/t)	4,500mm/min (0.1mm/t)
切削深度 Depth of Cut	a <sub>p</sub> =2mm a <sub>e</sub> =34mm	a <sub>p</sub> =0.2mm a <sub>e</sub> =34mm
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心(BT30) Horizontal Machining Center	
加工面粗糙度 Surface Roughness	Ra=0.08μm Rz=0.7μm	Ra=0.05μm Rz=0.3μm

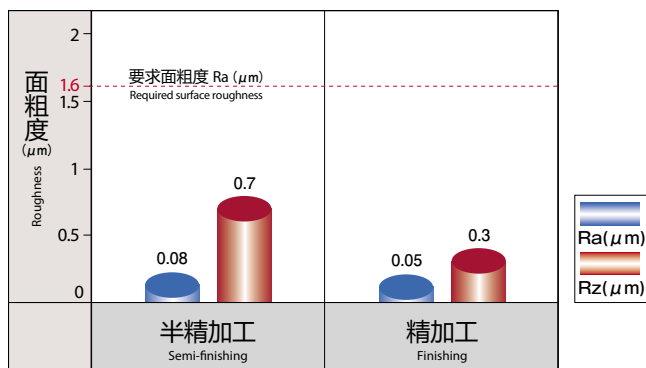

在 BT30 的小型加工中心上进行半精加工、精加工。两种加工出的面精度都在要求以内。并且可以将半精加工、精加工的两刀缩减为一刀，从而缩短加工时间。

Semi-finishing and finishing took place with the BT30 small machining center. The PFAL cutter was able to meet the required surface roughness in both processes. Moreover, the number of passes was reduced from 2 to 1 during both semi-finishing and finishing, shortening machining time.

### 切屑形状解析 Analysis of Cutting Chip Shape

正因为是铝制刀体，所以想要防止切屑与刀体接触  
The aluminum cutter body must avoid direct contact with cutting chips

排屑的示意图 Image of chip evacuation



切屑与刀体不接触!

The cutting chip does not come in direct contact with the body!

在刀片的容屑槽内处理切屑，与铝制刀体无接触。


Cutting chips are processed through the blade's chip pocket to prevent them from coming into contact with the aluminum cutter body.

# Technical Data

■ 技术资料 Technical Data

## ■ 刃尖高度调整顺序 Instructions for Adjusting the Cutting Edge Height

### ■ 各部位名称 Names of Components

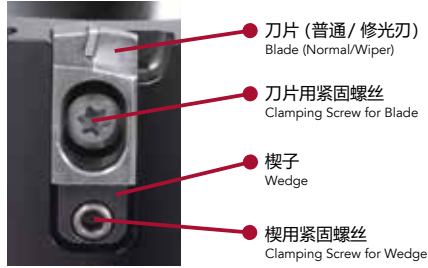

Ⓐ T型扳手 (T25-T)  
T-Wrench



Ⓑ L型扳手 (3MM-L)  
L-Wrench



### ① 确认楔子

#### Confirm Wedge Position

确认楔子的表面与刀体外周面对齐。

Check and ensure that all wedges are in the correct position. Make adjustments when necessary.



正确  
Correct



错误  
Incorrect

### ② 普通刀片/修光刀刀片的装卸

#### Mounting of Blades

2种刀片用10N·m的扭矩拧紧。

修光刀刀片在刀体上有安装标记的地方装夹。

Mount one wiper blade (FR1204-W) to the wiper blade position indicator and the normal blades (FR1204 or FR1206) to the remaining positions.

Using the T-Wrench (Ⓐ), tighten the clamp screw completely to 10N·m.



修光刀的安装标识  
Wiper Blade Position Indicator


※使用附件T型扳手(A)。确保刀体接触面与楔子紧贴,边用手指压住刀片边拧紧。

### ③ 刃尖高度的测定

#### Measurement of Cutting Edge Height

测定所有的刃尖高度，  
确认普通刀片中最高的刀片。

Measure all of the cutting edge heights  
and determine the highest normal cutting edge.



### ④ 普通刀片的刃尖高度调整


#### Adjustment of Normal Blades

以最高刃为基准，配合其他普通刀片的刃尖高度进行调整(推荐  
0.005mm以内) 顺时针旋转楔子用紧固螺丝来提高刃尖。

Adjust all other normal cutting edges to match the highest normal cutting edge  
height. The offset should be within 0.005mm. To lift the wedges, use the L-Wrench  
(B) to turn the wedge screw clockwise.



※使用附件的L型扳手(B)。



# Technical Data

■ 技术资料 Technical Data

## ■ 刃尖高度调整顺序 Instructions for Adjusting the Cutting Edge Height

### ⑤ 修光刀刀片的刃尖高度调整

#### Adjustment of Wiper Blade


比普通刀片的刃尖高度调高0.02~0.04mm。

Use the L-Wrench(Ⓑ) to adjust the wiper blade so that it is 0.02 - 0.04mm higher than the other normal blades.



※使用附件的 L 型扳手 (B)。

刃尖高度 Cutting Edge Height




■ 普通刀片 Normal Blade  
■ 修光刀刀片 Wiper Blade

### 修光刀刀片的刃尖位置 Cutting Edge Position of the Wiper Blade

修光刀刀片相较于普通刀片，设定上缩进去约0.8mm左右。这样可以使得底刃即使在高切深加工时，也能发挥提高精加工面的效果。

The wiper blade is automatically set to be 0.8mm closer to the interior than the normal blade. Based on this design, only the bottom of the wiper edge is used during processing, thus enabling a high quality surface finish even in high depth (ap) milling.

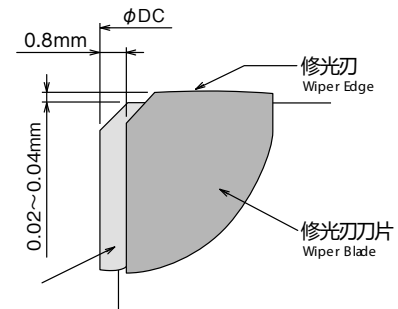

普通刀片  
Normal Blade


### 注意事项

Cautions during use

- 只可在提高刃尖高度方向上调整
- 可调整范围为0.6mm。
- 接近调整范围上限时，将难以提高刃尖高度。这时，一旦取下刀片，楔子将会回到最初位置，请再次进行调整。(④楔子的确认)
- 接触式探针触碰刃尖时，请注意不要破坏PCD刀片。
- Blades can be adjusted by lifting upward only.
- Maximum adjustment is 0.6mm.
- When the maximum adjustment limit is reached, remove the blade and start over from step ④.
- When measuring the edge height using a contact tool presetter with a touch probe, please be cautious to not damage the PCD edge.


■不要临时拧紧，在完全拧紧后就能调整刃尖高度，这样可以缩短调试时间。

Temporary tightening is not required. Cutting edge height can be adjusted after complete tightening of the clamping screw, making the setup process quick and effortless.

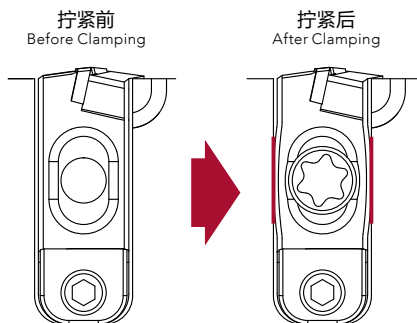

完全拧紧时，刀片两侧会鼓起将刀片与刀体多面固定。

The tightening of the clamping screw pushes sides of the blade outward, locking it tightly in place with the cutter body




完全拧紧后，保证刀片锁死的状态下通过楔子顶部把刀片顶上去。由于刀片被下面的楔子顶着，所以在加工中不会晃动。

After tightening the clamping screw, the blade is locked into position secured by the wedge taper. The wedge assures a fix and unmovable blade position during machining.

# » Phoenix PFB

精加工用球头铣刀  
Finishing Ball End Mill

Phoenix Finishing Ball

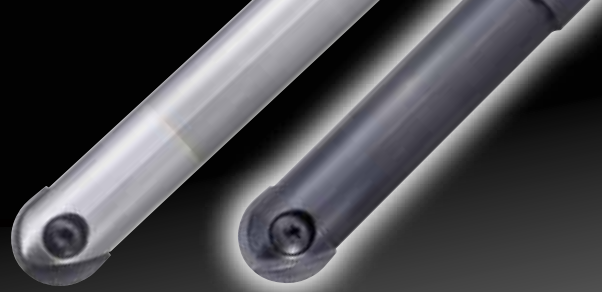

可转位式的精加工用球头型铣刀。  
安装精度高，所以能实现良好的加工面和长寿命。

The high precision mounting of the insert into the body enables a superior milling surface and long tool life.



## ■ 刀片特点

### Features of Insert

- 高R精度  $\pm 6\mu\text{m}$   
High radius precision
- 锋利性良好的螺旋刃型  
Spiral cutting edge with excellent sharpness

### PFB-SP

- 对应从软钢到耐热合金广泛的加工材料
- 锋利性与刃尖刚性兼备
- 优良的耐崩损性
- Applicable to a wide variety of work materials from mild steel to HRSA
- Sharp but rigid cutting edge
- Excellent chipping resistance

### XP3320材质 Grade

- 适用于钢材· 不锈钢· 铸铁的干式加工
- 对应耐热合金(湿式)
- For dry milling of steel, stainless steel, and cast iron
- For wet milling of HRSA

### PFB-Q

- 能对应根切形状的有效切削刃角为220度型
- 大径最外面的部分没有直槽部，进行深壁加工时抑制振动，能得到良好的加工面。
- Applicable to undercuts with 220° effective cutting edge section
- No straight cutting edge at the outer peripheral surface, which is applicable to standing wall milling that occurs chattering

### XP3225材质 Grade

- 广泛加工材料的稳定加工
- 优良的润滑性，耐磨损性
- 适用于钢· 不锈钢的湿式加工
- For stable milling of a wide variety of work materials
- Excellent lubricity and wear resistance
- For wet milling of steel and stainless steel

NEW

### PFB-Q-ST

- 能对应根切形状的有效切削刃角为200~220度型
- 高刚性的刃形，具有优良的耐崩损性
- Applicable to undercuts with 200°- 220° effective cutting edge section
- Excellent wear resistance with its high rigidity cutting geometry

### XP2225材质 Grade

- 适用于不锈钢· 耐热合金
- 优良的耐热性
- For stainless steel and HRSA
- Excellent heat resistance

### PFB-SH

- 最适用于铸铁· 球墨铸铁· 高硬度钢的高刚性刃型
- 刃尖的特殊处理提高强度
- 采用耐磨损性高的硬质合金母材
- For milling cast iron, ductile iron and HRSA
- Strong cutting edge by the special processing
- Highly resistant carbide material

### XP3310材质 Grade

- 最适于高硬度钢· 铸铁的干式加工
- 优良的耐热性，耐磨损性
- Ideal for dry milling of high hardened steel and cast iron
- Excellent heat and wear resistance

### PFB-D

- 最适于石墨加工的重视锋利性的专用刃型
- 采用附着度优良的金刚石涂层专用硬质合金母材
- Sharp cutting edge specialized for milling graphite
- Highly adhesive carbide material for diamond coating


### XC4505材质 Grade

- 适用于非铁金属加工
- 最适于石墨加工的金刚石涂层
- For milling nonferrous material
- Optimal diamond coating for milling graphite

# Phoenix


精加工用球头铣刀  
Finishing Ball End Mill

## PFB



## Specification

■形状尺寸表 Specification

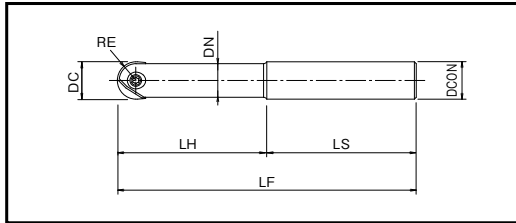

钢制刀柄 Steel Shank

商品号 EDP No.	名称 Designation	外径 DC	球半径 RE	全长 LF	有效长		刃数 ZEPF	柄径 DCON	柄长 LS	颈径 DN	
					颈长 LH	L/D					
②	7801400	PFB-R080SS08-S120	8	4	120	36	4.5	2	8	84	7
③	7801401	PFB-R100SS10-S130	10	5	130	45	4.5	2	10	85	9
④	7801402	PFB-R120SS12-S130	12	6	130	54	4.5	2	12	76	11
⑤	7801403	PFB-R160SS16-S140	16	8	140	64	4	2	16	76	14
⑥	7801404	PFB-R200SS20-S160	20	10	160	80	4	2	20	80	18
⑦	7801405	PFB-R250SS25-S160	25	12.5	160	75	3	2	25	85	22
⑧	7801406	PFB-R300SS32-S170	30	15	170	90	3	2	32	80	27
⑨	7801407	PFB-R320SS32-S180	32	16	180	96	3	2	32	84	29

硬质合金刀柄 短柄型 Carbide Shank, Short Type

商品号 EDP No.	名称 Designation	外径 DC	球半径 RE	全长 LF	有效长		刃数 ZEPF	柄径 DCON	柄长 LS	颈径 DN	
					颈长 LH	L/D					
①	7801429	PFB-R060SS06-S80CS	6	3	80	15	2.5	2	6	65	5.4
②	7801430	PFB-R080SS08-S100CS	8	4	100	20	2.5	2	8	80	7
③	7801431	PFB-R100SS10-S100CS	10	5	100	25	2.5	2	10	75	9
④	7801432	PFB-R120SS12-S110CS	12	6	110	30	2.5	2	12	80	11
⑤	7801433	PFB-R160SS16-S140CS	16	8	140	40	2.5	2	16	100	14
⑥	7801434	PFB-R200SS20-S160CS	20	10	160	50	2.5	2	20	110	18
⑦	7801435	PFB-R250SS25-S160CS	25	12.5	160	62.5	2.5	2	25	97.5	22
⑧	7801436	PFB-R300SS32-S170CS	30	15	170	75	2.5	2	32	95	27
⑨	7801437	PFB-R320SS32-S180CS	32	16	180	80	2.5	2	32	100	29

▶ NEXT


库存种类都为○(即标准库存品) Stock are categorized as ○ (Standard stock item).

# Phoenix

精加工用球头铣刀


Finishing Ball End Mill

## PFB



## Specification

■形状尺寸表 Specification

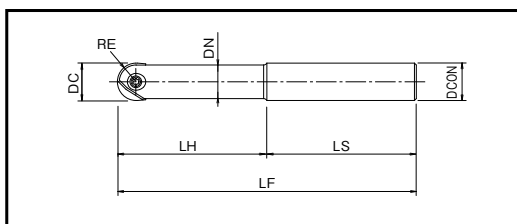

单位:mm Unit:mm

◀ FROM

硬质合金刀柄 长柄型 Carbide Shank, Long Type


①	商品号 EDP No.	名称 Designation	外径 DC	球半径 RE	全长 LF	有效长		刃数 ZEFP	柄径 DCON	柄长 LS	颈径 DN
						颈长 LH	L/D				
①	7801439	PFB-R060SS06-L100CS	6	3	100	30	5	2	6	70	5.4
②	7801440	PFB-R080SS08-L120CS	8	4	120	40	5	2	8	80	7
③	7801441	PFB-R100SS10-L130CS	10	5	130	50	5	2	10	80	9
④	7801442	PFB-R120SS12-L140CS	12	6	140	60	5	2	12	80	11
⑤	7801443	PFB-R160SS16-L160CS	16	8	160	72	4.5	2	16	88	14
⑥	7801444	PFB-R200SS20-L180CS	20	10	180	90	4.5	2	20	90	18
⑦	7801445	PFB-R250SS25-L200CS	25	12.5	200	100	4	2	25	100	22
⑧	7801446	PFB-R300SS32-L220CS	30	15	220	120	4	2	32	100	27
⑨	7801447	PFB-R320SS32-L230CS	32	16	230	128	4	2	32	102	29

硬质合金刀柄 超长柄型 Carbide Shank, Extra Long Type

单位:mm Unit:mm

①	商品号 EDP No.	名称 Designation	外径 DC	球半径 RE	全长 LF	有效长		刃数 ZEFP	柄径 DCON	柄长 LS	颈径 DN
						颈长 LH	L/D				
①	7801419	PFB-R060SS06-LL120CS	6	3	120	42	7	2	6	78	5.4
②	7801420	PFB-R080SS08-LL140CS	8	4	140	56	7	2	8	84	7
③	7801421	PFB-R100SS10-LL150CS	10	5	150	70	7	2	10	80	9
④	7801422	PFB-R120SS12-LL160CS	12	6	160	84	7	2	12	76	11
⑤	7801423	PFB-R160SS16-LL200CS	16	8	200	96	6	2	16	104	14
⑥	7801424	PFB-R200SS20-LL240CS	20	10	240	120	6	2	20	120	18
⑦	7801425	PFB-R250SS25-LL260CS	25	12.5	260	137.5	5.5	2	25	122.5	22
⑧	7801426	PFB-R300SS32-LL290CS	30	15	290	165	5.5	2	32	125	27
⑨	7801427	PFB-R320SS32-LL300CS	32	16	300	176	5.5	2	32	124	29

▶ NEXT

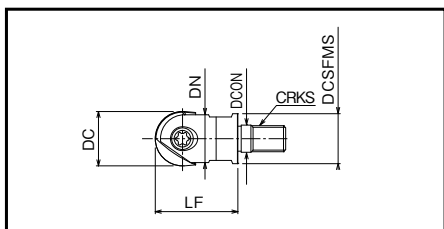

### FROM

螺纹安装型 Screw Fit Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刀数 ZEFP	装夹直径 DCON	螺纹尺寸 CRKS	扳手尺寸 Spanner Size	全长 LF	颈径 DN	端面直径 DCSFMS	
③	7801490	PFB-R100SF6	10	2	6.5	M 6	7	26	9	9
④	7801491	PFB-R120SF6	12	2	6.5	M 6	7	26	11	11
⑤	7801492	PFB-R160SF8	16	2	8.5	M 8	10	32	14	14.5
⑥	7801493	PFB-R200SF10	20	2	10.5	M10	14	38	18	18
⑦	7801494	PFB-R250SF12	25	2	12.5	M12	17	38	22	23
⑧	7801495	PFB-R300SF16	30	2	17	M16	22	43	27	28

刀具夹具, 刀柄请参考P.190~P.192  
See p.190-p.192 for shank holders.

## Accessories

### 零件 Accessories

	商品号 EDP No.	名称 Designation	适用刀体类型 Applicable Body	推荐安装扭矩 Recommended Tightening Torque
 固定螺丝 Clamping Screw	7808124	FS20652RB	①	0.8 N·m
	7808123	FS25669RB	②	1N·m
	7808117	FS30686RB	③	1.2 N·m
	7808118	FS35610RB	④	2N·m
	7808119	FS40613RB	⑤	3N·m
	7808120	FS50615RB	⑥	5N·m
	7808121	FS60620RB	⑦	5N·m
	7808122	FS80624RB	⑧, ⑨	6N·m

	商品号 EDP No.	名称 Designation	适用刀体类型 Applicable Body
 仅 T30-T T30-T only  扳手 Wrench	7808203	T6-D	①
	7808204	T7-D	②
	7808205	T8-D	③
	7808207	T10-D	④
	7808208	T15-D	⑤
	7808209	T20-D	⑥, ⑦
	7808212	T30-T	⑧, ⑨

扳手请另购。 The wrenches are sold separately from the cutters.

库存种类都为○(即标准库存品) Stock are categorized as ○ (Standard stock item).


# Phoenix

精加工用球头铣刀  
Finishing Ball End Mill

## PFB刀片






Inserts

## Inserts

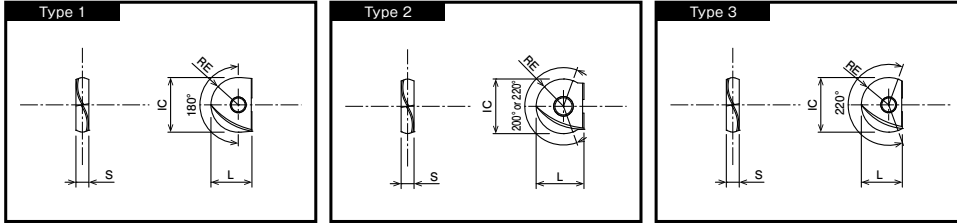

适用刀片 Inserts

单位:mm Unit:mm

形状 Appearance	名称 Designation	切削刃数 No. of Cutting Edges	有效R角度 Range Deg	刀片尺寸 Insert Size				形状 类型 Type	适用 刀体 类型 Applicable Body	涂层种类 Grade of Coated Materials				
				内接圆径 IC	球半径 RE	厚度 S	L			XP3225	XP3310	XP3320	XP2225	XC4505
 螺旋槽型 Spiral Type	PFB080-SP	2	180	8	4	2.4	7	1	②	7820030		7820010		
	PFB100-SP			10	5	2.6	8.5		③	7820031	7820011			
	PFB120-SP			12	6	3	10		④	7820032	7820012			
	PFB160-SP			16	8	4	12		⑤	7820033	7820013			
	PFB200-SP			20	10	5	15		⑥	7820034	7820014			
	PFB250-SP			25	12.5	6	18.5		⑦	7820035	7820015			
	PFB300-SP			30	15	7	22.5		⑧	7820036	7820016			
 螺旋槽型 (球形状) Spiral Type (Full Radius Type)	PFB060-Q	2	220	6	3	2	5	2	①	7820048				
	PFB070-Q			7	3.5	2	5.5		①	7820049				
	PFB080-Q			8	4	2.4	7		②	7820050				
	PFB100-Q			10	5	2.6	8.5		③	7820051				
	PFB120-Q			12	6	3	10	3	④	7820052				
	PFB160-Q			16	8	4	12		⑤	7820053				
	PFB200-Q			20	10	5	15		⑥	7820054				
	PFB250-Q			25	12.5	6	18.5		⑦	7820055				
PFB300-Q	30	15	7	22.5	⑧	7820056								
 直槽型 (球形状) Straight Type (Full Radius Type)	PFB080-Q-ST	2	200	8	4	2.4	7	2	②			<b>NEW</b>	7820060	
	PFB100-Q-ST			10	5	2.6	8.5		③			<b>NEW</b>	7820061	
	PFB120-Q-ST			12	6	3	10		④			<b>NEW</b>	7820062	
	PFB160-Q-ST		16	8	4	12	3	⑤			<b>NEW</b>	7820063		
	PFB200-Q-ST		20	10	5	15		⑥			<b>NEW</b>	7820064		
	PFB250-Q-ST		25	12.5	6	18.5		⑦			<b>NEW</b>	7820065		
	PFB300-Q-ST		30	15	7	22.5		⑧			<b>NEW</b>	7820066		
 螺旋槽型 (刃尖强化) Spiral Type (Reinforced Edge Type)	PFB060-SH	2	180	6	3	2	5	1	①		7820039			
	PFB080-SH			8	4	2.4	7		②		7820040			
	PFB100-SH			10	5	2.6	8.5		③		7820041			
	PFB120-SH			12	6	3	10		④		7820042			
	PFB160-SH			16	8	4	12		⑤		7820043			
	PFB200-SH			20	10	5	15		⑥		7820044			
	PFB250-SH			25	12.5	6	18.5		⑦		7820045			
	PFB300-SH			30	15	7	22.5		⑧		7820046			
	PFB320-SH			32	16	7	23.5		⑨		7820047			
 螺旋槽型 (金刚石涂层) Spiral Type (Diamond Coated)	PFB060-D	2	220	6	3	2	5	1	①					7820018
	PFB070-D			7	3.5	2	5.5		①					7820019
	PFB080-D			8	4	2.4	7		②					7820020
	PFB100-D			10	5	2.6	8.5		③					7820021
	PFB120-D			12	6	3	10		④					7820022
	PFB160-D			16	8	4	12		⑤					7820023
	PFB200-D			20	10	5	15		⑥					7820024
	PFB250-D			25	12.5	6	18.5		⑦					7820025
PFB300-D	30	15	7	22.5	⑧					7820026				


# Cutting Conditions

■ 切削深度及实际加工直径 (φDe) 基准表 Chart of cutting depth and actual cutting diameter

单位:mm Unit:mm

ap(切削深度) Depth of cut		实际加工直径 (φDe) Actual cutting diameter														
外径 DC	球半径 RE	0.1	0.2	0.3	0.4	0.5	0.8	1	1.5	2	2.5	3	3.5	4	4.5	5
6	3	1.5	2.2	2.6	3	3.3	4.1									
7	3.5	1.6	2.3	2.8	3.3	3.6	4.5									
8	4	1.8	2.5	3	3.5	3.9	4.8									
10	5	2	2.8	3.4	3.9	4.4	5.4	6	7.1							
12	6	2.2	3.1	3.7	4.3	4.8	6	6.6	7.9	8.9						
16	8	2.5	3.6	4.3	5	5.6	7	7.7	9.3	10.6	11.6					
20	10	2.8	4	4.9	5.6	6.2	7.8	8.7	10.5	12	13.2	14.3	15.2			
25	12.5	3.2	4.5	5.4	6.3	7	8.8	9.8	11.9	13.6	15	16.2	17.3	18.3		
30	15	3.5	4.9	6	6.9	7.7	9.7	10.8	13.1	15	16.6	18	19.3	20.4	21.4	22.4
32	16	3.6	5	6.2	7.1	7.9	10	11.1	13.5	15.5	17.2	18.7	20	21.2	22.2	23.2

● 实际加工直径计算方法 How to determine actual cutting diameter




$$De = 2\sqrt{ap \times (DC - ap)}$$

■ 推荐的进给量及表面加工粗糙度 Recommended pick feed and milling surface roughness


单位:mm Unit:mm

外径 DC	6	7	8	10	12	16	20	25	30	32
进给 Pf	0.4	0.45	0.5	0.6	0.7	0.8	1	1.2	1.3	1.4
表面加工粗糙度 h	0.007	0.007	0.008	0.009	0.01	0.01	0.012	0.014	0.014	0.015

■ 理论上的加工面粗糙度 Theoretical milling surface roughness

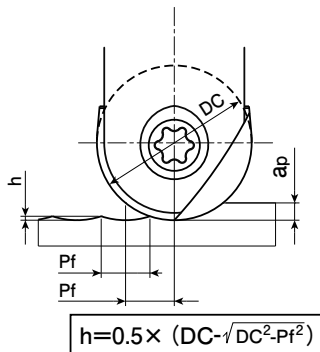

例) DC=20mm  
Pf= 1mm  
→ h=0.0125mm

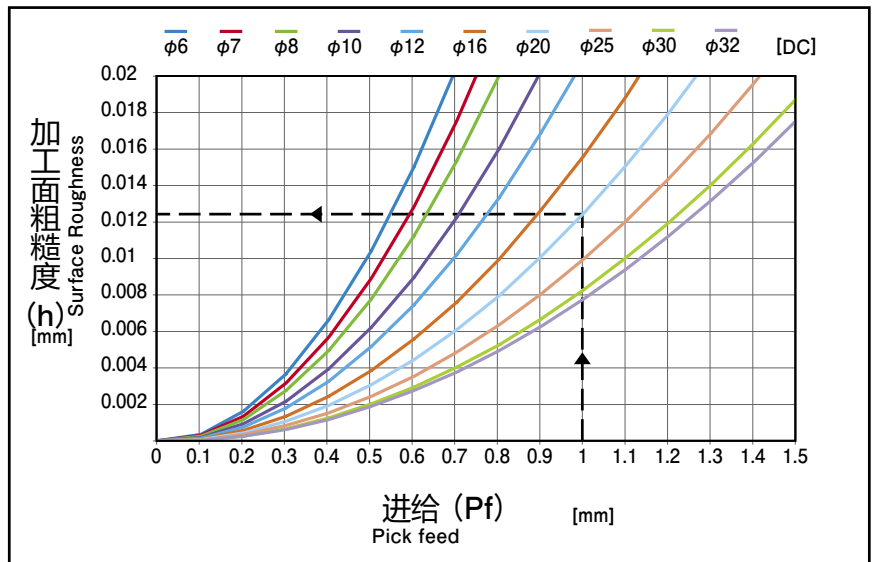

## 加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材料 Best  
○第二推荐材料 Good

刀片材质 Insert Grades	形状 Appearance	P	M	K	N	S	H
XP3320	PFB-SP	○	○	○		○	○
XP3225	PFB-Q	◎	○		◎*1	○	
XP3310	PFB-SH			◎			◎
XP2225	PFB-Q-ST	○	◎			◎	○
XC4505	PFB-D				◎*2		

## 切削条件基准表 Cutting Conditions

## PFB-SP·PFB-Q·PFB-SH·PFB-Q-ST

\*1 铝合金、铜合金的第一推荐 Best recommended for aluminum and copper alloy applications  
\*2 石墨、CFRP 的第一推荐 Best recommended for graphite and CFRP applications

	加工材料 Work Material	抗损强度·硬度 Tensile Strength·Hardness	切削速度 Vc (m/min) Cutting Speed	切深量 ap (mm) Depth of Cut	每刃进给量 fz (mm/t)			
					刀具直径 DC			
					φ6, 8	φ10, 12	φ16, 20	φ25~32
P	软钢、低碳素钢 Mild Steel, Carbon Steel (SS400, S10C)	~180HB	300 (200~400)	0.02DC	0.1	0.12	0.14	0.18
	碳素钢、合金钢 Carbon Steel, Alloy Steel (S50C, SCM440)	~280HB	300 (200~400)	0.02DC	0.07	0.1	0.12	0.14
	模具钢 Die Steel (SKD61, SKD11)	~280HB	250 (150~350)	0.02DC	0.07	0.1	0.12	0.14
M	不锈钢 Stainless Steel (SUS304, SUS420)	~250HB	250 (150~350)	0.02DC	0.07	0.12	0.14	0.17
K	铸铁 Cast Iron (FC250)	~300N/mm <sup>2</sup>	400 (300~500)	0.02DC	0.12	0.14	0.18	0.22
	球墨铸铁 Ductile Cast Iron (FCD400)	~600N/mm <sup>2</sup>	300 (200~400)	0.02DC	0.1	0.12	0.14	0.18
N	铝合金 Aluminum Alloy	~13%Si	500 (400~600)	0.03DC	0.12	0.14	0.18	0.22
	铜合金 Copper Alloy (C1100)	-	300 (200~400)	0.03DC	0.11	0.13	0.17	0.2
S	超耐热合金(湿式) Superalloy (Wet) (Inconel 718)	-	50 (25~80)	0.015DC	0.04	0.05	0.06	0.06
	钛合金(湿式) Titanium Alloy (Wet) (Ti-6Al-4V)	-	90 (40~120)	0.02DC	0.06	0.08	0.11	0.13
H	预硬钢 Pre-hardened Steel (NAK80, STAVAX)	40~43HRC	200 (100~300)	0.015DC	0.06	0.07	0.08	0.1
	铸件用钢 Die Cast Steel (DAC-MAGIC, DH31)	43~48HRC	180 (90~200)	0.015DC	0.05	0.06	0.07	0.07
	调质钢 Hardened Steel (SKD11)	50~60HRC	150 (100~250)	0.01DC	0.05	0.06	0.07	0.07

·上述数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。

The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting conditions.

## PFB-D

	加工材料 Work Material	抗损强度·硬度 Tensile Strength·Hardness	切削速度 Vc (m/min) Cutting Speed	切深量 ap (mm) Depth of Cut	每刃进给量 fz (mm/t)			
					刀具直径 DC			
					φ6, 8	φ10, 12	φ16, 20	φ25~32
N	石墨 Graphite	-	500 (400~600)	0.03DC	0.14	0.17	0.21	0.25
	复合材料 Carbon Fiber Reinforced Plastic (CFRP)	-	400 (300~500)	0.03DC	0.11	0.13	0.17	0.2

·上述数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。


The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting conditions.

# Cutting Data

加工数据 Cutting Data

## NEW 涡轮叶片的翼面精加工 Finishing of turbine blade with the XP2225

使用工具 Tool	PFB-R160SF8		其他公司产品 Competitor
使用刀片 (材质) Insert (grade)	PFB160-Q-ST (XP2225)	硬质合金涂层刀片 Coated Carbide Insert	
零件名 Work	涡轮叶片 (切削长度487m/每片刀片) Turbine Blade (Cutting length 487 m / per blade)		
加工材料 Work Material	SUS430		
切削速度 Cutting Speed	420m/min (8,350min <sup>-1</sup> )		
进给速度 Feed	6,687mm/min (0.4mm/t)		
切削深度 Depth of Cut	ap=0.2mm Pf=0.5mm		
切削油剂 Coolant	水溶性切削油剂 Water-Soluble		
使用机械 Machine	叶片专用5轴加工机 5-axis machine exclusive for blade machining		

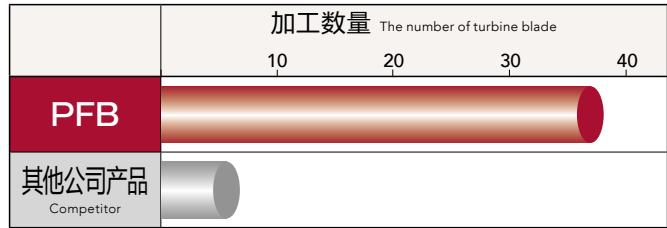

新设计的刃型实现高速加工和防崩损对策。新材料大幅提升刀具耐久性。  
Achieved high-speed milling without chipping by the newly designed cutting geometry. Durability has also greatly increased due to the new material grade.



## 相当于FCD700材质的大型冲压模具精加工 Finishing milling on large press die of FCD700

使用工具 Tool	PFB-R300SS32-LL290CS (R15×2刃)	
使用刀片 (材质) Insert (grade)	PFB300-SH (XP3310)	
零件名 Work	侧板 Side panel outer	
加工材料 Work Material	GGG70L (FCD700相当) Equivalent	
切削速度 Cutting Speed	565m/min (6,000min <sup>-1</sup> )	
进给速度 Feed	5,600mm/min (0.47mm/t)	
加工方法 Cutting Method	仿型加工 Profiling Milling	
切削深度 Depth of Cut	ap=0.17mm Pf=0.5mm	
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	龙门加工中心 (BT50) Double Column Machining Center	




加工51小时后的刃尖状态  
Cutting edge after 51 hours of milling

51个小时加工后的刃部没有崩刃，磨损状态良好。检测工件所有部分都满足形状和精度的要求，加工面的光洁度良好。

Reasonable wear and no chipping of cutting edge occurred after 51 hours of machining. All points of the work material met the required form accuracy, and the shiny machined surface was achieved.

## 金刚石涂层令人震撼的耐久性 Surprising durability of the diamond coating

使用工具 Tool	PFB-R250SS25-S160 (R12.5×2刃)	
使用刀片 (材质) Insert (grade)	PFB250-SP (XP3320)	PFB250-D (XC4505)
加工材料 Work Material	石墨 Graphite	
切削速度 Cutting Speed	220m/min (2,800min <sup>-1</sup> )	
进给速度 Feed	560mm/min (0.1mm/t)	
加工方法 Cutting Method	啄钻加工 Pick Milling	
切削深度 Depth of Cut	ap=12.5mm Pf=0.2mm	
切削油剂 Coolant	无 None	
使用机械 Machine	立式加工中心 (BT40) Vertical Machining Center	

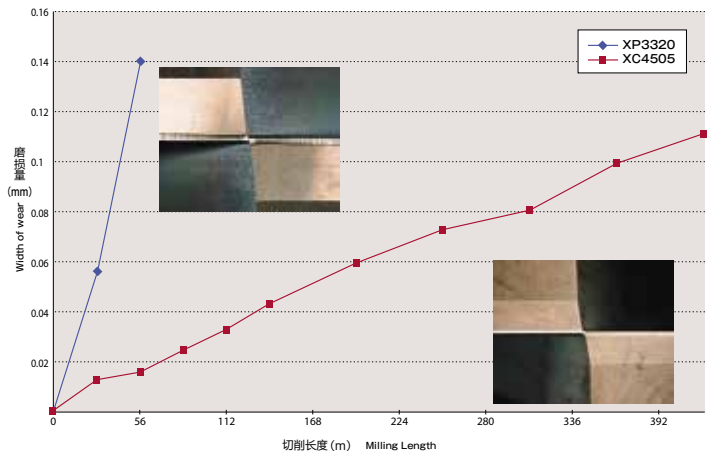

可以体现出石墨加工中金刚石涂层的优势。  
Diamond coating showed its superiority in machining graphite.


# Cutting Data

加工数据 Cutting Data

## SUH600的叶片加工(磨损量的比较) Milling of a SUH600 blade (Comparison of tool wear)

使用工具 Tool	PFB-R200SS20-S160 (R10×2刃)
使用刀片(材质) Insert (grade)	PFB200-SP (XP3320)
零件名 Work	叶片模架 Blade Sample Model
加工材料 Work Material	SUH600相等物 Equivalent
刀具悬伸 Overhang Length	110mm
切削速度 Cutting Speed	94m/min (1,500min <sup>-1</sup> )
进给速度 Feed	2,000mm/min (0.67mm/t)
加工方法 Cutting Method	仿型加工 Profiling Milling
切削深度 Depth of Cut	a <sub>p</sub> =0.2mm Pf=1mm
切削油剂 Coolant	水溶性切削油剂 Water-Soluble
使用机械 Machine	立式加工中心(BT40) Vertical Machining Center

工件表面 R300  
Workpiece top surface




加工时间 Time	70分钟 minutes		140分钟 minutes	
切削长度 Milling Length	100m		200m	
PFB				
磨损量 (mm) Wear amount	0.033	0.030	0.041	0.043
其他公司 Competitor				
磨损量 (mm) Wear amount	0.032	0.033	0.070	0.071

200m 加工结束时, PFB 的磨损量比其他公司产品少1/2。

In comparison to competitor products, the PFB has half the amount of tooling wear after machining 200m.


## S50C 的30°倾斜面加工 S50C at 30° inclined surface machining

使用工具 Tool	PFB-R200SS20-S160 (R10×2刃)
使用刀片(材质) Insert (grade)	PFB200-SP (XP3225)
加工材料 Work Material	S50C
刀具悬伸 Overhang Length	80mm
切削速度 Cutting Speed	300m/min (4,800min <sup>-1</sup> )
进给速度 Feed	1,344mm/min (0.14mm/t)
加工方法 Cutting Method	直线加工 倾斜度30° Straight line pick 30-degree inclination
切削深度 Depth of Cut	a <sub>p</sub> =0.1mm Pf=0.5mm
切削油剂 Coolant	无(气冷式) Air Blow
使用机械 Machine	卧式加工中心(BT40) Horizontal Machining Center

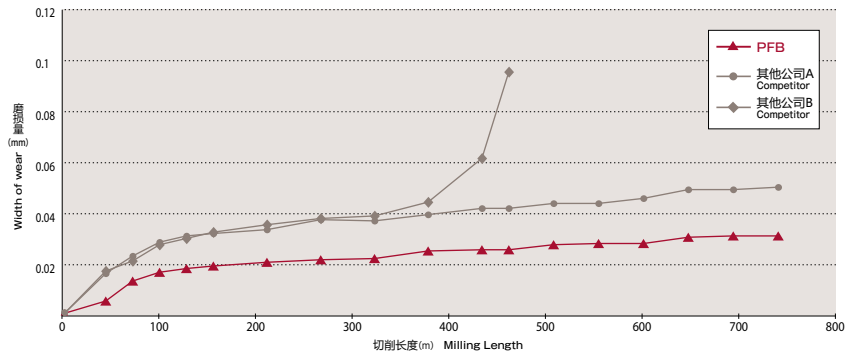

XP3225 刚开始加工时的磨损量比其他公司产品小, 也没有突发性的崩刃, 加工很稳定。

The XP3225 is capable of achieving stable machining without abrupt interruptions and tool chipping. In comparison to competitor products, tooling wear on the XP3225 in the initial machining stage was minimal.

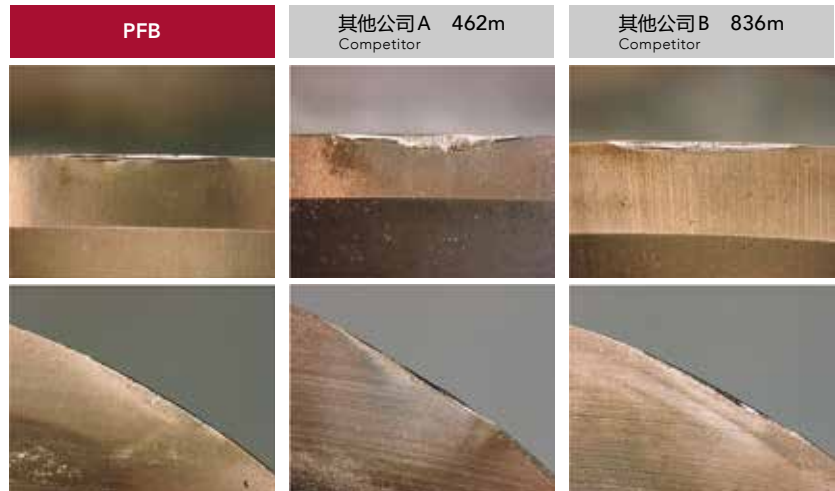

## FC250的模具镶块加工 Machining die insert with FC250

使用工具 Tool	PFB-R200SS20-LL240CS (R10×2刃)	
使用刀片(材质) Insert (grade)	PFB200-SH (XP3310)	
零件名 Work	模具镶块 Die Insert	
加工材料 Work Material	FC250	
刀具悬伸 Overhang Length	160mm	
切削速度 Cutting Speed	345m/min (5,500min <sup>-1</sup> )	
进给速度 Feed	4,000mm/min (0.36mm/t)	
加工方法 Cutting Method	仿型加工、等高线加工 Profile Milling, Contour Milling	
切削深度 Depth of Cut	a <sub>p</sub> =0.2mm Pf=0.25mm	
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	立式加工中心(BT50) Vertical Machining Center	

加工完成后的刃尖状态  
Cutting edge after milling

与其他公司产品相比，光泽面和加工工件精度都得到提高。  
The finished surface and accuracy increased compared by the competition.

## PFB-D 的石墨电极加工 Machining graphite electrode with PFB-D

使用工具 Tool	PFB-R160SS16-LL200CS (R8×2刃)	PFB-R080SS08-LL140CS (R4×2刃)
使用刀片(材质) Insert (grade)	PFB160-D (XC4505)	PFB080-D (XC4505)
加工材料 Work Material	石墨电极 Graphite electrode	
刀具悬伸 Overhang Length	120mm (7.5D)	110mm (13.75D)
切削速度 Cutting Speed	400m/min (8,000min <sup>-1</sup> )	100m/min (4,000min <sup>-1</sup> )
进给速度 Feed	8,000mm/min (0.5mm/t)	2,160mm/min (0.27mm/t)
加工方法 Cutting Method	仿型加工、等高线加工 Profile and Contour Milling	
切削深度 Depth of Cut	a <sub>p</sub> =8mm Pf=12mm	a <sub>p</sub> =0.3mm Pf=0.24mm
切削油剂 Coolant	无 None	
使用机械 Machine	立式加工中心(BT40) Vertical Machining Center	



## SKD11的模具镶块加工 Die insert with SKD11

使用工具 Tool	PFB-R100SS10-LL150CS (R5×2刃)	
使用刀片(材质) Insert (grade)	PFB100-SP (XP3320)	
零件名 Work	模具镶块 Die Insert	
加工材料 Work Material	SKD11相等物 (58HRC) Equivalent	
刀具悬伸 Overhang Length	80mm	
切削速度 Cutting Speed	200m/min (8,000min <sup>-1</sup> )	
进给速度 Feed	2,000mm/min (0.125mm/t)	
加工方法 Cutting Method	仿型加工、等高线加工 Profile Milling, Contour Milling	
切削深度 Depth of Cut	a <sub>p</sub> =0.1mm Pf=0.2mm	
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	立式加工中心(HSK40) Vertical Machining Center	


加工7小时后的刃尖状况  
Cutting edge after 7 hours of milling

加工后刃尖无异常损伤。加工面也比其他公司产品好。  
Cutting edge had normal wear without abnormal damage after finishing 7 hours of machining. Finished surface was much smoother and consistent versus competitor.

# » Phoenix PFR

精加工用圆弧角铣刀  
Finishing Radius End Mill


Phoenix Finishing Radius End Mill

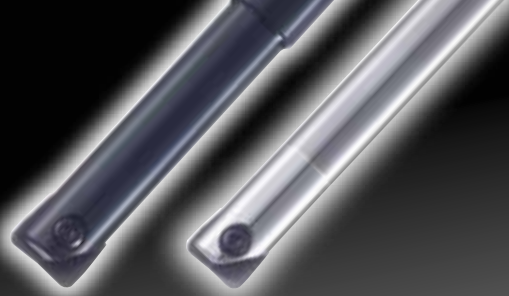

## ■ 刀片特点

Features of Insert

- 高圆弧角R 精度  $\pm 8\mu\text{m}$   
High corner radius precision
- 外径许容差  $-0.02\text{mm}$   
Tolerance for outer diameter
- 底刃处有修光刃  
Wiper insert at the end cutting edge
- 特殊处理使得刃尖强度得到提高  
Strong cutting edge by the special processing





## ■ 高刚性刀身

Highly rigid cutter body

- 实现稳定加工的高精度·高刚性刀体  
Highly accurate and rigid cutter body for stable milling
- 与PFB刀体可通用(容易发生切屑缠绕的壁铣等加工, 推荐使用后角较大的PFB刀体)  
Inserts can be attached to PFB cutter body (For milling standing wall, PFB body, which has a bigger clearance, is recommended).

【精加工面粗度曲线】Finished surface roughness curve

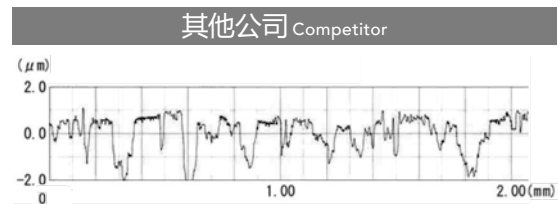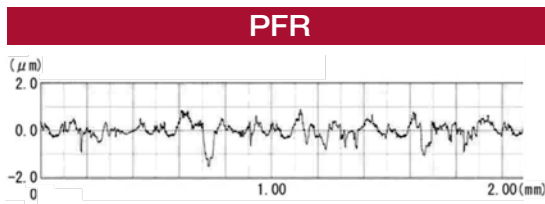

### PFR-ST

- 对应从软钢到耐热合金广泛的加工材料
- 最适于悬长较长的加工(L/D=5以上)
- 锋利性及吃入性良好的正前角刃型
- Applicable to a wide variety of work materials from mild steel to HRSA
- Ideal for milling with long overhangs (L/D  $\geq 5$ )
- Positive rake angle with excellent sharpness and bite

### XP3225材质 Grade

- 面向广泛加工材料的稳定加工
- 优良的润滑性、耐磨损性
- For stable milling of a wide variety of work materials
- Excellent lubricity and wear resistance

### PFR-SH

- 最适于铸铁、球墨铸铁、高硬度钢加工
- 底刃的二维负角可提高刃尖强度, 即使在不稳定环境下也可稳定加工
- 采用耐磨损性高的硬质合金母材
- For milling cast iron, ductile iron and HRSA
- High rigid cutting edge with two-dimensional negative chamfer, which is applicable to unstable machining conditions
- Highly resistant carbide material

### XP3310材质 Grade


- 最适于高硬度钢·铸铁的干式加工
- 优良的耐热性、耐磨损性
- Ideal for dry milling of high hardened steel and cast iron
- Excellent heat resistance and wear resistance

### PFR-D

- 重视锋利性、最适于石墨加工的专用刃型
- 采用附着力优良的金剛石涂层专用硬质合金母材
- Sharp cutting edge specialized for milling graphite
- Highly adhesive carbide material for diamond coating


### XC4505材质 Grade

- 面向非铁金属
- 最适于石墨加工的金剛石涂层
- For milling nonferrous material
- Optimal diamond coating for milling graphite

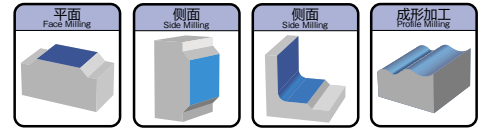

## Specification

■形状尺寸表 Specification

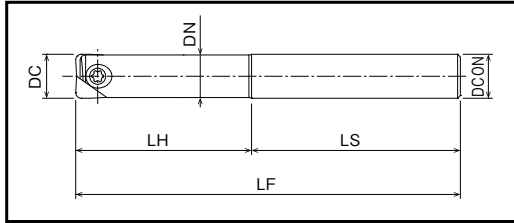

钢制刀柄 Steel Shank

商品号 EDP No.	名称 Designation	外径 DC	全长 LF	有效长		刃数 ZEFP	柄径 DCON	柄长 LS	颈径 DN	
				颈长 LH	L/D					
②	7832000	PFR-R080SS08-S120	8	120	36	4.5	2	8	84	7.5
③	7832001	PFR-R100SS10-S130	10	130	45	4.5	2	10	85	9.5
④	7832002	PFR-R120SS12-S130	12	130	54	4.5	2	12	76	11.5
⑤	7832003	PFR-R160SS16-S140	16	140	64	4	2	16	76	15.5
⑥	7832004	PFR-R200SS20-S160	20	160	80	4	2	20	80	19.5
⑦	7832005	PFR-R250SS25-S160	25	160	75	3	2	25	85	24.5
⑧	7832006	PFR-R300SS32-S170	30	170	90	3	2	32	80	29.5
⑨	7832007	PFR-R320SS32-S180	32	180	96	3	2	32	84	31.5

硬质合金刀柄 短柄型 Carbide Shank, Short Type


商品号 EDP No.	名称 Designation	外径 DC	全长 LF	有效长		刃数 ZEFP	柄径 DCON	柄长 LS	颈径 DN	
				颈长 LH	L/D					
①	7832029	PFR-R060SS06-S80CS	6	80	15	2.5	2	6	65	5.4
②	7832030	PFR-R080SS08-S100CS	8	100	20	2.5	2	8	80	7.5
③	7832031	PFR-R100SS10-S100CS	10	100	25	2.5	2	10	75	9.5
④	7832032	PFR-R120SS12-S110CS	12	110	30	2.5	2	12	80	11.5
⑤	7832033	PFR-R160SS16-S140CS	16	140	40	2.5	2	16	100	15.5
⑥	7832034	PFR-R200SS20-S160CS	20	160	50	2.5	2	20	110	19.5
⑦	7832035	PFR-R250SS25-S160CS	25	160	62.5	2.5	2	25	97.5	24.5
⑧	7832036	PFR-R300SS32-S170CS	30	170	75	2.5	2	32	95	29.5
⑨	7832037	PFR-R320SS32-S180CS	32	180	80	2.5	2	32	100	31.5

NEXT

# Phoenix


精加工用圆弧角铣刀  
Finishing Radius End Mill

## PFR

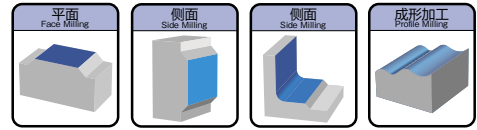

## Specification

形状尺寸表 Specification

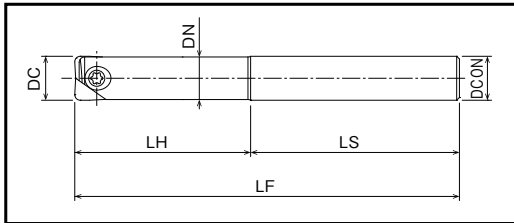

单位:mm Unit:mm

### FROM

硬质合金刀柄 长柄型 Carbide Shank, Long Type


①	商品号 EDP No.	名称 Designation	外径 DC	全长 LF	有效长		刃数 ZEFP	柄径 DCON	柄长 LS	颈径 DN
					颈长 LH	L/D				
①	7832039	PFR-R060SS06-L100CS	6	100	30	5	2	6	70	5.4
②	7832040	PFR-R080SS08-L120CS	8	120	40	5	2	8	80	7.5
③	7832041	PFR-R100SS10-L130CS	10	130	50	5	2	10	80	9.5
④	7832042	PFR-R120SS12-L140CS	12	140	60	5	2	12	80	11.5
⑤	7832043	PFR-R160SS16-L160CS	16	160	72	4.5	2	16	88	15.5
⑥	7832044	PFR-R200SS20-L180CS	20	180	90	4.5	2	20	90	19.5
⑦	7832045	PFR-R250SS25-L200CS	25	200	100	4	2	25	100	24.5
⑧	7832046	PFR-R300SS32-L220CS	30	220	120	4	2	32	100	29.5
⑨	7832047	PFR-R320SS32-L230CS	32	230	128	4	2	32	102	31.5

硬质合金刀柄 超长柄型 Carbide Shank, Extra Long Type

单位:mm Unit:mm

①	商品号 EDP No.	名称 Designation	外径 DC	全长 LF	有效长		刃数 ZEFP	柄径 DCON	柄长 LS	颈径 DN
					颈长 LH	L/D				
①	7832019	PFR-R060SS06-LL120CS	6	120	42	7	2	6	78	5.4
②	7832020	PFR-R080SS08-LL140CS	8	140	56	7	2	8	84	7.5
③	7832021	PFR-R100SS10-LL150CS	10	150	70	7	2	10	80	9.5
④	7832022	PFR-R120SS12-LL160CS	12	160	84	7	2	12	76	11.5
⑤	7832023	PFR-R160SS16-LL200CS	16	200	96	6	2	16	104	15.5
⑥	7832024	PFR-R200SS20-LL240CS	20	240	120	6	2	20	120	19.5
⑦	7832025	PFR-R250SS25-LL260CS	25	260	137.5	5.5	2	25	122.5	24.5
⑧	7832026	PFR-R300SS32-LL290CS	30	290	165	5.5	2	32	125	29.5
⑨	7832027	PFR-R320SS32-LL300CS	32	300	175	5.5	2	32	125	31.5

### 形状尺寸表 Specification

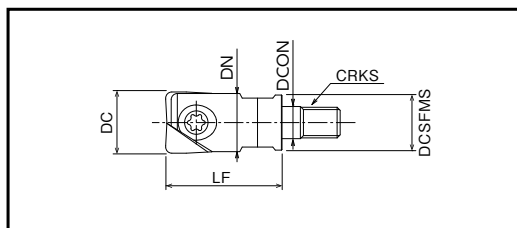

### 螺纹安装型 Screw Fit Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEFP	装夹直径 DCON	螺纹尺寸 CRKS	扳手尺寸 Spanner Size	全长 Lf	颈径 DN	端面直径 DCSFMS	
③	7832090	PFR-R100SF6	10	2	6.5	M6	7	26	9	9
④	7832091	PFR-R120SF6	12	2	6.5	M6	7	26	11	11
⑤	7832092	PFR-R160SF8	16	2	8.5	M8	10	32	15	14.5
⑥	7832093	PFR-R200SF10	20	2	10.5	M10	14	38	19	18
⑦	7832094	PFR-R250SF12	25	2	12.5	M12	17	38	24	23
⑧	7832095	PFR-R300SF16	30	2	17	M16	22	43	29	28
⑨	7832096	PFR-R320SF16	32	2	17	M16	22	43	31	28

刀柄夹具请参考 p.190~p.192.  
See p.190-p.192 for shank holders.


## Accessories

### 零件 Accessories

商品号 EDP No.	名称 Designation	适用刀体 Applicable Body	推荐安装扭矩 Recommended Tightening Torque
7808124	FS20652RB	①	0.8 N·m
7808123	FS25669RB	②	1N·m
7808117	FS30686RB	③	1.2 N·m
7808118	FS35610RB	④	2N·m
7808119	FS40613RB	⑤	3N·m
7808120	FS50615RB	⑥	5N·m
7808121	FS60620RB	⑦	5N·m
7808122	FS80624RB	⑧, ⑨	6N·m



商品号 EDP No.	名称 Designation	适用刀体 Applicable Body
7808203	T6-D	①
7808204	T7-D	②
7808205	T8-D	③
7808207	T10-D	④
7808208	T15-D	⑤
7808209	T20-D	⑥, ⑦
7808212	T30-T	⑧, ⑨



扳手请另购。 The wrenches are sold separately from the cutters.

# Phoenix


精加工用圆弧角铣刀

Finishing Radius End Mill

## PFR 刀片


Inserts

## Inserts



### ■ 适用刀片(PFR-ST) Inserts

单位:mm Unit:mm


形状 Appearance	名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size					适用刀体 类型 Applicable Body	涂层种类 Grade of Coated Materials	库存 Stock
			W1	圆弧角 RE	外周 刃长 LE	厚度 S	L		XP3225	
 <p>通用型 Multi-purpose Type</p>	PFR060R03-ST	2	6	0.3	2	2	5	①	7820350	C
	PFR060R05-ST		6	0.5					7820351	C
	PFR060R10-ST		6	1					7820352	C
	PFR070R03-ST		7	0.3					7820353	C
	PFR070R05-ST		7	0.5					7820354	C
	PFR070R10-ST		7	1					7820355	C
	PFR080R03-ST		8	0.3	2.7	2.4	7	②	7820200	C
	PFR080R05-ST		8	0.5					7820201	C
	PFR080R10-ST		8	1					7820202	C
	PFR080R20-ST		8	2					7820203	C
	PFR100R03-ST		10	0.3	3.3	2.6	8.5	③	7820204	C
	PFR100R05-ST		10	0.5					7820205	C
	PFR100R10-ST		10	1					7820206	C
	PFR100R20-ST		10	2					7820207	C
	PFR110R03-ST		11	0.3					7820356	C
	PFR110R05-ST		11	0.5					7820357	C
	PFR110R10-ST		11	1	7820358	C				
	PFR110R20-ST		11	2	7820359	C				
	PFR120R03-ST		12	0.3	4	3	10	④	7820208	C
	PFR120R05-ST		12	0.5					7820209	C
	PFR120R10-ST		12	1					7820210	C
	PFR120R20-ST		12	2					7820211	C
	PFR120R30-ST		12	3					7820212	C
	PFR130R03-ST		13	0.3					7820360	C
	PFR130R05-ST		13	0.5	7820361	C				
	PFR130R10-ST		13	1	7820362	C				
	PFR130R20-ST		13	2	7820363	C				

NEXT

FROM

适用刀片(PFR-ST) Inserts

单位:mm Unit:mm

形状 Appearance	名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size					适用刀体 类型 Applicable Body	涂层种类 Grade of Coated Materials	库存 Stock
			W1	圆弧角 RE	外周 刃长 LE	厚度 S	L		XP3225	
 <p>通用加工 Multi-purpose Type</p>	PFR160R03-ST	2	16	0.3	5.3	4	12	⑤	7820213	C
	PFR160R05-ST		16	0.5					7820214	C
	PFR160R10-ST		16	1					7820215	C
	PFR160R20-ST		16	2					7820216	C
	PFR160R30-ST		16	3					7820217	C
	PFR170R03-ST		17	0.3					7820364	C
	PFR170R05-ST		17	0.5					7820365	C
	PFR170R10-ST		17	1					7820366	C
	PFR170R20-ST		17	2					7820367	C
	PFR200R03-ST		20	0.3					6.7	5
	PFR200R05-ST		20	0.5	7820219	C				
	PFR200R10-ST		20	1	7820220	C				
	PFR200R20-ST		20	2	7820221	C				
	PFR200R30-ST		20	3	7820222	C				
	PFR210R03-ST		21	0.3	7820368	C				
	PFR210R05-ST		21	0.5	7820369	C				
	PFR210R10-ST		21	1	7820370	C				
	PFR210R20-ST		21	2	7820371	C				
	PFR250R03-ST		25	0.3	8.3	6	18.5	⑦		
	PFR250R05-ST		25	0.5					7820224	C
	PFR250R10-ST		25	1					7820225	C
	PFR250R20-ST		25	2					7820226	C
	PFR250R30-ST		25	3					7820227	C
	PFR260R03-ST		26	0.3					7820372	C
	PFR260R05-ST		26	0.5					7820373	C
	PFR260R10-ST		26	1					7820374	C
	PFR260R20-ST		26	2					7820375	C
	PFR300R03-ST		30	0.3					10	7
	PFR300R05-ST		30	0.5	7820229	C				
	PFR300R10-ST		30	1	7820230	C				
	PFR300R20-ST		30	2	7820231	C				
	PFR300R30-ST		30	3	7820232	C				
PFR320R03-ST	32	0.3	10.3	7	23.5	⑨	7820233	C		
PFR320R05-ST	32	0.5					7820234	C		
PFR320R10-ST	32	1					7820235	C		
PFR320R20-ST	32	2					7820236	C		
PFR320R30-ST	32	3					7820237	C		

NEXT

○=标准库存品 ○=Standard stock item

# Phoenix


精加工用圆弧角铣刀

Finishing Radius End Mill

## PFR刀片

Inserts


## Inserts



FROM

■ 适用刀片(PFR-SH) Inserts

单位:mm Unit:mm


形状 Appearance	名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size					适用刀体 Applicable Body	涂层种类 Grade of Coated Materials	库存 Stock	
			W1	圆弧角 RE	外周 刃长 LE	厚度 S	L		XP3310		
 <p>刃尖强化型 Reinforced Edge Type</p>	PFR060R03-SH	2	6	0.3	2	2	5	①	7820400	C	
	PFR060R05-SH		6	0.5					7820401	C	
	PFR060R10-SH		6	1					7820402	C	
	PFR070R03-SH		7	0.3					5.5	7820403	C
	PFR070R05-SH		7	0.5						7820404	C
	PFR070R10-SH		7	1						7820405	C
	PFR080R03-SH		8	0.3	2.7	2.4	7	②	7820250	C	
	PFR080R05-SH		8	0.5					7820251	C	
	PFR080R10-SH		8	1					7820252	C	
	PFR080R20-SH		8	2					7820253	C	
	PFR100R03-SH		10	0.3	3.3	2.6	8.5	③	7820254	C	
	PFR100R05-SH		10	0.5					7820255	C	
	PFR100R10-SH		10	1					7820256	C	
	PFR100R20-SH		10	2					7820257	C	
	PFR110R03-SH		11	0.3					7820406	C	
	PFR110R05-SH		11	0.5					7820407	C	
	PFR110R10-SH		11	1	7820408	C					
	PFR110R20-SH		11	2	7820409	C					
	PFR120R03-SH		12	0.3	4	3	10	④	7820258	C	
	PFR120R05-SH		12	0.5					7820259	C	
	PFR120R10-SH		12	1					7820260	C	
	PFR120R20-SH		12	2					7820261	C	
	PFR120R30-SH		12	3					7820262	C	
	PFR130R03-SH		13	0.3					7820410	C	
PFR130R05-SH	13	0.5	7820411	C							
PFR130R10-SH	13	1	7820412	C							
PFR130R20-SH	13	2	7820413	C							

NEXT

FROM

适用刀片(PFR-SH) Inserts

单位:mm Unit:mm

形状 Appearance	名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size					适用刀体 类型 Applicable Body	涂层种类 Grade of Coated Materials	库存 Stock
			W1	圆弧角 RE	外周 刃长 LE	厚度 S	L		XP3310	
 <p>刃尖强化型 Reinforced Edge Type</p>	PFR160R03-SH	2	16	0.3	5.3	4	12	⑤	7820263	C
	PFR160R05-SH		16	0.5					7820264	C
	PFR160R10-SH		16	1					7820265	C
	PFR160R20-SH		16	2					7820266	C
	PFR160R30-SH		16	3					7820267	C
	PFR170R03-SH		17	0.3					7820414	C
	PFR170R05-SH		17	0.5					7820415	C
	PFR170R10-SH		17	1					7820416	C
	PFR170R20-SH		17	2					7820417	C
	PFR200R03-SH		20	0.3	6.7	5	15	⑥	7820268	C
	PFR200R05-SH		20	0.5					7820269	C
	PFR200R10-SH		20	1					7820270	C
	PFR200R20-SH		20	2					7820271	C
	PFR200R30-SH		20	3					7820272	C
	PFR210R03-SH		21	0.3					7820418	C
	PFR210R05-SH		21	0.5					7820419	C
	PFR210R10-SH		21	1					7820420	C
	PFR210R20-SH		21	2					7820421	C
	PFR250R03-SH		25	0.3	8.3	6	18.5	⑦	7820273	C
	PFR250R05-SH		25	0.5					7820274	C
	PFR250R10-SH		25	1					7820275	C
	PFR250R20-SH		25	2					7820276	C
	PFR250R30-SH		25	3					7820277	C
	PFR260R03-SH		26	0.3					7820422	C
	PFR260R05-SH		26	0.5					7820423	C
	PFR260R10-SH		26	1					7820424	C
	PFR260R20-SH		26	2					7820425	C
	PFR300R03-SH		30	0.3	10	7	22.5	⑧	7820278	C
	PFR300R05-SH		30	0.5					7820279	C
	PFR300R10-SH		30	1					7820280	C
	PFR300R20-SH		30	2					7820281	C
	PFR300R30-SH		30	3	7820282	C				
PFR320R03-SH	32	0.3	10.3	7	23.5	⑨	7820283	C		
PFR320R05-SH	32	0.5					7820284	C		
PFR320R10-SH	32	1					7820285	C		
PFR320R20-SH	32	2					7820286	C		
PFR320R30-SH	32	3					7820287	C		

NEXT

○=标准库存品 ○=Standard stock item


## Phoenix

精加工用圆弧角铣刀  
Finishing Radius End Mill

## PFR 刀片

Inserts


## Inserts



FROM

■ 适用刀片(PFR-D) Inserts

单位:mm Unit:mm

形状 Appearance	名称 Designation	切削刃数 No. of Cutting Edges	刀片尺寸 Insert Size					通用刀体类型 Applicable Body	涂层种类 Grade of Coated Materials	库存 Stock
			W1	圆弧角 RE	外周 刃长 LE	厚度 S	L		XC4505	
 金刚石涂层 Diamond Coated	PFR060R03-D	2	6	0.3	2	2	5	①	7820450	C
	PFR060R05-D		6	0.5					7820451	C
	PFR060R10-D		6	1					7820452	C
	PFR080R03-D		8	0.3	2.7	2.4	7	②	7820300	C
	PFR080R05-D		8	0.5					7820301	C
	PFR080R10-D		8	1					7820302	C
	PFR080R20-D		8	2						※
	PFR100R03-D		10	0.3	3.3	2.6	8.5	③	7820303	C
	PFR100R05-D		10	0.5					7820304	C
	PFR100R10-D		10	1					7820305	C
	PFR100R20-D		10	2					※	
	PFR120R03-D		12	0.3	4	3	10	④	7820306	C
	PFR120R05-D		12	0.5					7820307	C
	PFR120R10-D		12	1					7820308	C
	PFR120R20-D		12	2						※
	PFR120R30-D		12	3					※	
	PFR160R03-D		16	0.3	5.3	4	12	⑤	7820309	C
	PFR160R05-D		16	0.5					7820310	C
	PFR160R10-D		16	1					7820311	C
	PFR160R20-D		16	2						※
	PFR160R30-D		16	3					※	
	PFR200R03-D		20	0.3	6.7	5	15	⑥	7820312	C
	PFR200R05-D		20	0.5					7820313	C
	PFR200R10-D		20	1					7820314	C
	PFR200R20-D		20	2						※
	PFR200R30-D		20	3						※
	PFR250R10-D		25	1	8.3	6	18.5	⑦		※
	PFR300R10-D		30	1	10	7	22.5	⑧		※
PFR320R10-D	32	1	10.3	7	23.5	⑨		※		

# Cutting Conditions

### 加工材料推荐

Recommended Materials by Insert Type

◎第一推荐材料 Best  
○第二推荐材料 Good

刀片材质 Insert Grades	形状 Appearance	P	M	K	N	S	H
XP3225	PFR-ST	◎	◎	○	◎*1	◎	○
XP3310	PFR-SH	○	○	◎			◎
XC4505	PFR-D				◎*2		

\* L/D ≥ 5以上推荐 XP3225 XP3225 is recommended when L/D ≥ 5  
 \* 断续切削推荐 XP3310 XP3310 is recommended for intermittent milling  
 \*1 铝合金的第一推荐 Best recommended for aluminum alloy  
 \*2 石墨、CFRP 的第一推荐 Best recommended for graphite and CFRP applications

### 切削条件基准表 Cutting Conditions

标准条件 Standard Condition

PFR-ST, PFR-SH

	加工材料 Work Material	抗拉强度·硬度 Tensile Strength·Hardness	切削速度 Vc (m/min) Cutting Speed			切削深度 ap (mm) Depth of Cut	每刃进给量 fz (mm/t)					
			悬伸 L/φ				刀片外径 w1 Insert					
			基准2.5D	5D	8D		φ6, 7	φ8~11	φ12~17	φ20~32		
P	软钢、低碳钢 (SS400, S10C) Mild Steel, Carbon Steel	~180HB	200 (150~250)			80%	60%	0.05DC	0.12	0.2	0.22	0.25
	碳素钢、合金钢 (S50C, SCM440) Carbon Steel, Alloy Steel	~280HB	180 (150~250)					0.05DC	0.15	0.18	0.22	0.25
	模具钢 (SKD61, SKD11) Die Steel	~280HB	150 (120~200)					0.05DC	0.1	0.15	0.18	0.2
M	不锈钢 (SUS304, SUS420) Stainless Steel	~250HB	150 (100~200)					0.03DC	0.08	0.12	0.15	0.18
K	铸铁 (FC250) Cast Iron	~300N/mm <sup>2</sup>	200 (150~250)					0.05DC	0.15	0.2	0.25	0.3
	球墨铸铁 (FCD400) Ductile Cast Iron	~600N/mm <sup>2</sup>	150 (100~200)					0.05DC	0.12	0.15	0.2	0.25
N	铝合金 (Aluminum Alloy)	~13%Si	300 (200~400)					0.05DC	0.2	0.25	0.3	0.35
S	超耐热合金(湿式) (Inconel 718) Superalloy (Wet)	-	30 (20~40)					0.02DC	0.04	0.05	0.08	0.12
	钛合金(湿式) (Ti-6Al-4V) Titanium Alloy (Wet)	-	50 (40~60)					0.02DC	0.05	0.08	0.1	0.15
H	预硬钢 (NAK80, STAVAX) Pre-hardened Steel	40~43HRC	120 (100~150)					0.03DC	0.08	0.1	0.12	0.18
	铸件用钢 (DAC-MAGIC, DH31) Die Cast Steel	43~48HRC	80 (50~100)					0.025DC	0.05	0.08	0.1	0.15
	调质钢 (SKD11) Hardened Steel	50~60HRC	60 (40~80)					0.02DC	0.04	0.05	0.08	0.1

PFR-D

	加工材料 Work Material	切削速度 Vc (m/min) Cutting Speed			切削深度 ap (mm) Depth of Cut	每刃进给量 fz (mm/t)					
		悬伸 L/φ				刀片外径 w1 Insert					
		基准2.5D	5D	8D		φ6, 7	φ8~11	φ12~17	φ20~32		
N	石墨 (Graphite)	250 (150~350)			80%	60%	0.1DC	0.25	0.4	0.5	0.5
	复合材料 (CFRP) Carbon Fiber Reinforced Plastic	200 (150~250)					0.5DC	0.05	0.1	0.15	0.2

· 上述数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。  
 The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting conditions.

# Phoenix

精加工用圆弧角铣刀

Finishing Radius End Mill

## PFR

## Cutting Conditions

### ■切削条件基准表 Cutting Conditions

高速精加工条件 High-speed finishing conditions

钢制刀柄 Steel Shank

	加工材料 Work Material	抗损强度·硬度 Tensile Strength· Hardness	切削速度 Vc (m/min) Cutting Speed	切削深度 ap (mm) Depth of Cut	每刃进给量 fz (mm/t)				
					刀片外径 Dc Insert				
					φ6~8	φ10~13	φ16~21	φ25~32	
P	软钢、低碳素钢 Mild Steel, Carbon Steel	(SS400, S10C)	~180HB	450	0.02DC	0.1	0.12	0.14	0.18
	碳素钢、合金钢 Carbon Steel, Alloy Steel	(S50C, SCM440)	~280HB	450	0.02DC	0.07	0.1	0.12	0.14
	模具钢 Die Steel	(SKD61, SKD11)	~280HB	375	0.02DC	0.07	0.1	0.12	0.14
M	不锈钢 Stainless Steel	(SUS304, SUS420)	~250HB	375	0.02DC	0.07	0.12	0.14	0.17
K	铸铁 Cast Iron	(FC250)	~300N/mm <sup>2</sup>	600	0.02DC	0.12	0.14	0.18	0.22
	球墨铸铁 Ductile Cast Iron	(FCD400)	~600N/mm <sup>2</sup>	450	0.02DC	0.1	0.12	0.14	0.18
N	铝合金 Aluminum Alloy		~13%Si	750	0.03DC	0.12	0.14	0.18	0.22
S	超耐热合金(湿式) Superalloy (Wet)	(Inconel 718)	-	70	0.015DC	0.04	0.05	0.06	0.06
	钛合金(湿式) Titanium Alloy (Wet)	(Ti-6Al-4V)	-	120	0.02DC	0.06	0.08	0.11	0.13
H	预硬钢 Pre-hardened Steel	(NAK80, STAVAX)	40~43HRC	300	0.015DC	0.06	0.07	0.08	0.1
	铸件用钢 Die Cast Steel	(DAC-MAGIC, DH31)	43~48HRC	270	0.015DC	0.05	0.06	0.07	0.07
	调质钢 Hardened Steel	(SKD11)	50~60HRC	220	0.01DC	0.05	0.06	0.07	0.07

### 硬质合金刀柄 短柄型 Carbide Shank Short Type

	加工材料 Work Material	抗损强度·硬度 Tensile Strength· Hardness	切削速度 Vc (m/min) Cutting Speed	切削深度 ap (mm) Depth of Cut	每刃进给量 fz (mm/t)				
					刀片外径 w1 Insert				
					φ6~8	φ10~13	φ16~21	φ25~32	
P	软钢、低碳素钢 Mild Steel, Carbon Steel	(SS400, S10C)	~180HB	540	0.02DC	0.1	0.12	0.14	0.18
	碳素钢、合金钢 Carbon Steel, Alloy Steel	(S50C, SCM440)	~280HB	540	0.02DC	0.07	0.1	0.12	0.14
	模具钢 Die Steel	(SKD61, SKD11)	~280HB	450	0.02DC	0.07	0.1	0.12	0.14
M	不锈钢 Stainless Steel	(SUS304, SUS420)	~250HB	450	0.02DC	0.07	0.12	0.14	0.17
K	铸铁 Cast Iron	(FC250)	~300N/mm <sup>2</sup>	720	0.02DC	0.12	0.14	0.18	0.22
	球墨铸铁 Ductile Cast Iron	(FCD400)	~600N/mm <sup>2</sup>	540	0.02DC	0.1	0.12	0.14	0.18
N	铝合金 Aluminum Alloy		~13%Si	600	0.03DC	0.12	0.14	0.18	0.22
S	超耐热合金(湿式) Superalloy (Wet)	(Inconel 718)	-	80	0.015DC	0.04	0.05	0.06	0.06
	钛合金(湿式) Titanium Alloy (Wet)	(Ti-6Al-4V)	-	150	0.02DC	0.06	0.08	0.11	0.13
H	预硬钢 Pre-hardened Steel	(NAK80, STAVAX)	40~43HRC	340	0.015DC	0.06	0.07	0.08	0.1
	铸件用钢 Die Cast Steel	(DAC-MAGIC, DH31)	43~48HRC	290	0.015DC	0.05	0.06	0.07	0.07
	调质钢 Hardened Steel	(SKD11)	50~60HRC	260	0.01DC	0.05	0.06	0.07	0.07

· 上述数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。

The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting conditions.

## ■ 切削条件基准表 Cutting Conditions

## 高速精加工条件 High-speed finishing conditions

## 硬质合金刀柄 长柄型 Carbide Shank Long Type

	加工材料 Work Material	抗张强度·硬度 Tensile Strength· Hardness	切削速度 Vc (m/min) Cutting Speed	切削深度 ap (mm) Depth of Cut	每刃进给量 fz (mm/t)				
					刀片外径 Dc Insert				
					φ6~8	φ10~13	φ16~21	φ25~32	
P	软钢、低碳素钢 Mild Steel, Carbon Steel	(SS400, S10C)	~180HB	480	0.02DC	0.1	0.12	0.14	0.18
	碳素钢、合金钢 Carbon Steel, Alloy Steel	(S50C, SCM440)	~280HB	480	0.02DC	0.07	0.1	0.12	0.14
	模具钢 Die Steel	(SKD61, SKD11)	~280HB	400	0.02DC	0.07	0.1	0.12	0.14
M	不锈钢 Stainless Steel	(SUS304, SUS420)	~250HB	400	0.02DC	0.07	0.12	0.14	0.17
K	铸铁 Cast Iron	(FC250)	~300N/mm <sup>2</sup>	640	0.02DC	0.12	0.14	0.18	0.22
	球墨铸铁 Ductile Cast Iron	(FCD400)	~600N/mm <sup>2</sup>	480	0.02DC	0.1	0.12	0.14	0.18
N	铝合金 Aluminum Alloy		~13%Si	800	0.03DC	0.12	0.14	0.18	0.22
S	超耐热合金(湿式) Superalloy (Wet)	(Inconel 718)	-	80	0.015DC	0.04	0.05	0.06	0.06
	钛合金(湿式) Titanium Alloy (Wet)	(Ti-6Al-4V)	-	144	0.02DC	0.06	0.08	0.11	0.13
H	预硬钢 Pre-hardened Steel	(NAK80, STAVAX)	40~43HRC	320	0.015DC	0.06	0.07	0.08	0.1
	铸件用钢 Die Cast Steel	(DAC-MAGIC, DH31)	43~48HRC	288	0.015DC	0.05	0.06	0.07	0.07
	调质钢 Hardened Steel	(SKD11)	50~60HRC	240	0.01DC	0.05	0.06	0.07	0.07

## 硬质合金刀柄 超长柄型 Carbide Shank Extra Long Type

	加工材料 Work Material	抗张强度·硬度 Tensile Strength· Hardness	切削速度 Vc (m/min) Cutting Speed	切削深度 ap (mm) Depth of Cut	每刃进给量 fz (mm/t)				
					刀片外径 Dc Insert				
					φ6~8	φ10~13	φ16~21	φ25~32	
P	软钢、低碳素钢 Mild Steel, Carbon Steel	(SS400, S10C)	~180HB	360	0.02DC	0.1	0.12	0.14	0.18
	碳素钢、合金钢 Carbon Steel, Alloy Steel	(S50C, SCM440)	~280HB	360	0.02DC	0.07	0.1	0.12	0.14
	模具钢 Die Steel	(SKD61, SKD11)	~280HB	300	0.02DC	0.07	0.1	0.12	0.14
M	不锈钢 Stainless Steel	(SUS304, SUS420)	~250HB	300	0.02DC	0.07	0.12	0.14	0.17
K	铸铁 Cast Iron	(FC250)	~300N/mm <sup>2</sup>	480	0.02DC	0.12	0.14	0.18	0.22
	球墨铸铁 Ductile Cast Iron	(FCD400)	~600N/mm <sup>2</sup>	360	0.02DC	0.1	0.12	0.14	0.18
N	铝合金 Aluminum Alloy		~13%Si	600	0.03DC	0.12	0.14	0.18	0.22
S	超耐热合金(湿式) Superalloy (Wet)	(Inconel 718)	-	60	0.015DC	0.04	0.05	0.06	0.06
	钛合金(湿式) Titanium Alloy (Wet)	(Ti-6Al-4V)	-	110	0.02DC	0.06	0.08	0.11	0.13
H	预硬钢 Pre-hardened Steel	(NAK80, STAVAX)	40~43HRC	240	0.015DC	0.06	0.07	0.08	0.1
	铸件用钢 Die Cast Steel	(DAC-MAGIC, DH31)	43~48HRC	220	0.015DC	0.05	0.06	0.07	0.07
	调质钢 Hardened Steel	(SKD11)	50~60HRC	180	0.01DC	0.05	0.06	0.07	0.07

· 上述数值是根据实际切削速度的标准数据。请根据加工环境适当的调整。

The above cutting conditions are to be used as general guidelines. Adjustments may be necessary depending on actual cutting conditions.

# Cutting Data

加工数据 Cutting Data


## PX5 (注塑模具用钢 33HRC) 的侧面、底面精加工 Side and bottom finish for PX5 (plastic mold steel 33HRC)

使用工具 Tool	PFR-R250SS25-LL260CS
使用刀片 (材质) Insert (grade)	PFR250R20-ST (XP3225)
加工材料 Work Material	PX5 (33HRC)
切削速度 Cutting Speed	82m/min (1,050min <sup>-1</sup> )
进给速度 Feed	500mm/min (0.24mm/t)
切削深度 Depth of Cut	a <sub>p</sub> =0.5mm a <sub>e</sub> =0.5~1mm
切削油剂 Coolant	水溶性切削油剂 Water-Soluble
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center

虽说是可转位式工具，但可以达到与整体式工具同等高精度加工。比原有的工具锋利性更好，即使提高切深量也能稳定加工，如果将工程变为半精加工，则加工时间可以大大缩短。

PFR enabled high precision machining as well as solid carbide tool. With the sharper cutting edge than conventional tools, PFR could be operated stably with deeper depth of cut. As a result, machining time was shortened by reducing semi-finishing process.

### 客户案例 Field Data

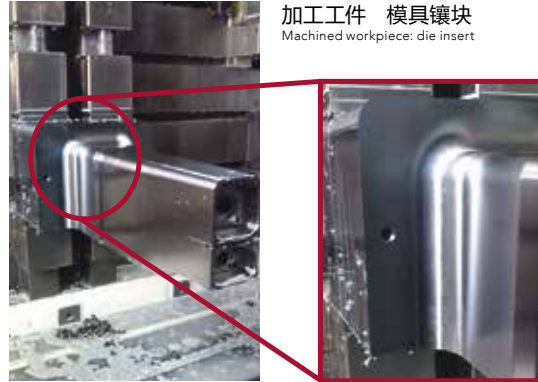

加工工件 模具镶块  
Machined workpiece: die insert

### 加工88m(3小时)后的刀尖磨损情况

Cutting edge after 88m (3 hours) of milling



前角面 Rake

后角面 Flank


## 注塑模具用钢的侧面及底面精加工 Side and bottom finish for plastic mold steel

使用工具 Tool	PFB-R200SS20-LL240CS (更换 PFB 刀体) (substituting PFB Body)	
使用刀片 (材质) Insert (grade)	PFR200R10-ST (XP3225)	
加工材料 Work Material	SD18(S55C 改良材) (enhanced S55C)	
切削速度 Cutting Speed	侧面精加工部 Side finish section 330m/min (5,250min <sup>-1</sup> )	底面精加工部 Bottom finish section 100m/min (1,600min <sup>-1</sup> )
进给速度 Feed	2,100mm/min (0.2mm/t)	400mm/min (0.125mm/t)
切削深度 Depth of Cut	a <sub>p</sub> =1.5mm a <sub>e</sub> =0.05~0.3mm	半精加工 Semi-finish a <sub>p</sub> =0.15mm 最终精加工 Final finish a <sub>p</sub> =0.05mm
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	立式加工中心(HSK A100) Vertical Machining Center	

以前半精加工，最终精加工各需要1个刀片，由于PFR的耐久性良好，所以可以只用一片刀片加工到底。另外加工面精度也非常不错。


With the conventional tool, one insert for semi-finishing and another insert for finishing were consumed. With PFR, one insert could be last until the final finishing process. Furthermore, better finished surface was achieved.

### 客户案例 Field Data

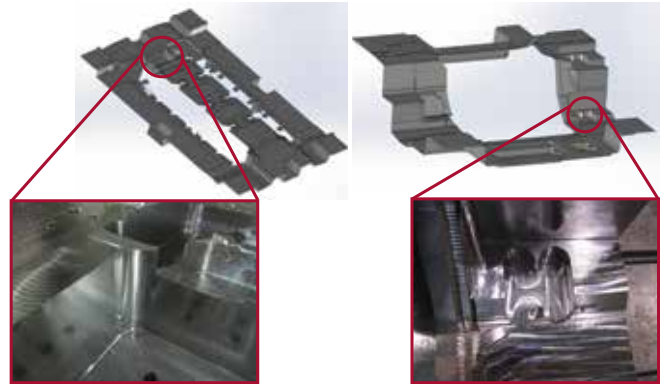

### 总共加工(90分钟)后的刀尖磨损情况

Cutting edge after 90 minutes of milling

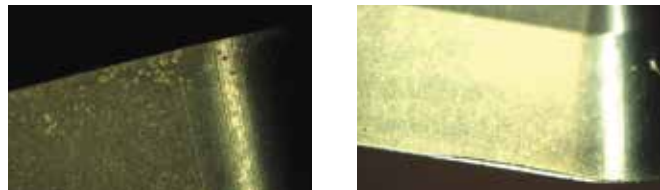


即便是悬长长的加工也可做到无崩刃的正常磨损。

The cutting edge shows normal wear, and there is no chipping despite the long overhang length.

## 加工FCD600的耐久性能评价测试 Durability performance evaluation test with FCD600

使用工具 Tool	PFR-R200SS20-S160
使用刀片 (材质) Insert (grade)	PFR200R10-SH (XP3310)
加工材料 Work Material	FCD600
切削速度 Cutting Speed	200m/min (3,200min <sup>-1</sup> )
进给速度 Feed	1,280mm/min (0.2mm/t)
切削深度 Depth of Cut	a <sub>p</sub> =1mm a <sub>e</sub> =2mm
切削油剂 Coolant	无(气冷式) Air Blow
使用机械 Machine	卧式加工中心(BT40) Horizontal Machining Center

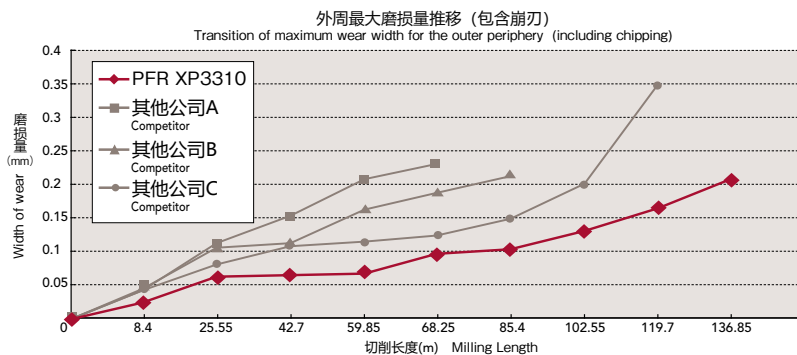


PFR 是从切削初期开始磨损就比较缓慢, 从而可以达到稳定加工。

PFR enabled stable machining, and the wear progress had been slow since the early stage.

## 加工DH31 (48 HRC) 的耐久性能评价测试 Durability performance evaluation test with DH31 (hot-die steel 48HRC)

使用工具 Tool	PFR-R200SS20-S160
使用刀片 (材质) Insert (grade)	PFR200R10-SH (XP3310)
加工材料 Work Material	DH31 (48HRC)
切削速度 Cutting Speed	60m/min (955min <sup>-1</sup> )
进给速度 Feed	191mm/min (0.1mm/t)
切削深度 Depth of Cut	a <sub>p</sub> =0.5mm a <sub>e</sub> =1mm
切削油剂 Coolant	水溶性切削油剂 Water-Soluble
使用机械 Machine	卧式加工中心(BT40) Horizontal Machining Center

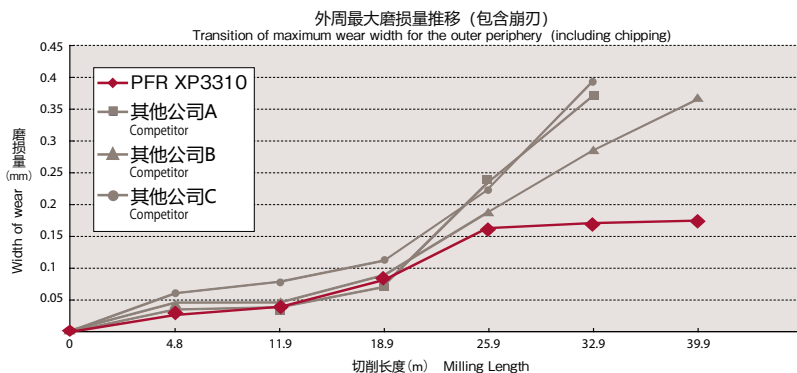

加工32.9m 时的磨损情况 State of damage after 32.9m of machining



PFR (XP3310) 的刀尖设有倒角所以耐磨损性较高, 应对热轧工具钢(48HRC)也能稳定加工。

With the special chamfer on the cutting edge, PFR's insert XP3310 have a high chipping resistance. It enabled stable operation in machining hot work tool steel.

# Cutting Data


加工数据 Cutting Data

## 加工 S50C 耐久性评价测试 Durability performance evaluation test with S50C

使用工具 Tool	PFR-R200SS20-S160
使用刀片 (材质) Insert (grade)	PFR200R10-ST (XP3225)
加工材料 Work Material	S50C
切削速度 Cutting Speed	200m/min (3,200min <sup>-1</sup> )
进给速度 Feed	1,280mm/min (0.2mm/t)
切削深度 Depth of Cut	a <sub>p</sub> =0.1mm a <sub>e</sub> =2mm
切削油剂 Coolant	水溶性切削油剂 Water-Soluble
使用机械 Machine	卧式加工中心(BT40) Horizontal Machining Center

当超过 43m 切削长度时, 其他公司的产品显示出明显的磨损。然而, PFR (XP3225) 即使在 140m 的长度之后, 磨损也很小, 且可继续使用。

Competitors' products showed significant wear when exceeding 43m of milling length. PFR's insert XP3225, however, showed only little wear even after 140m length and remained good.

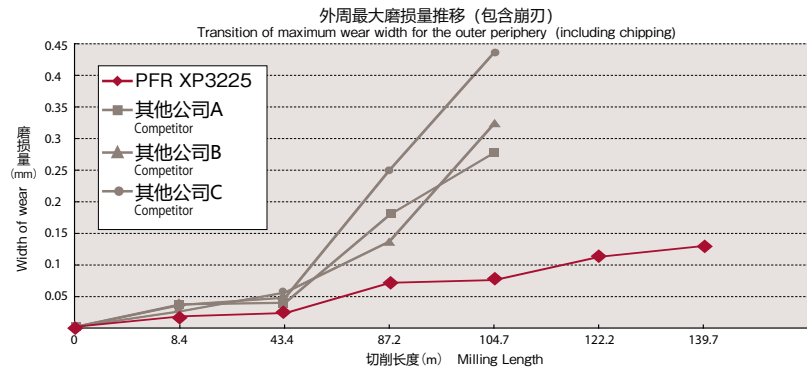

### 104.7m 加工时的磨损情况 State of damage after 104.7m of machining



## PFR-D 加工石墨电极测试 Field data of machining graphite electrode with PFR-D

使用工具 Tool	PFR-R200SS20-S160CS
使用刀片 (材质) Insert (grade)	PFR200R20-D [R2特殊] (XC4505) Special
加工材料 Work Material	石墨 Graphite
切削速度 Cutting Speed	125m/min (2,000min <sup>-1</sup> )
进给速度 Feed	1,000mm/min (0.25mm/t)
加工方法 Cutting Method	等高线加工 Contour Milling
切削深度 Depth of Cut	a <sub>p</sub> =1mm a <sub>e</sub> =0.5mm
切削油剂 Coolant	无 None
使用机械 Machine	立式石墨加工机(BT40) Vertical Graphite Milling Machine

	外周刃 Peripheral Cutting Edge	底刃 End Teeth	前角 Rake Angle
加工17小时后的 磨损情况 State of damage after 17 hours of machining			
后刃面磨损量 Frank wear	0.049mm	0.021mm	




可以获得与其他公司整体硬质合金刀具同等加工面精度。且由于是可转位式刀具, 也可以削减成本。

PFR-B achieved fair finishing surface accuracy versus the competition. Also machining cost was reduced by applying PFB instead of using solid carbide end mills.



## PFR-D 加工石墨电极测试 Field data of machining graphite electrode with PFR-D

使用工具 Tool	PFR-R160SS-S140CS
使用刀片 (材质) Insert (grade)	PFR160R10-D (XC4505)
加工材料 Work Material	石墨 Graphite
刀具悬伸 Overhang Length	50mm (2.5D)
切削速度 Cutting Speed	135m/min (2,700min <sup>-1</sup> )
进给速度 Feed	3,330mm/min (0.62mm/t)
加工方法 Cutting Method	等高线加工 Contour Milling
切削深度 Depth of Cut	$a_p=0.22\sim 0.5\text{mm}$ $a_e=2\sim 8\text{mm}$
切削油剂 Coolant	无 None
使用机械 Machine	立式加工中心(BT40) Vertical Machining Center

	外周刃 Peripheral Cutting Edge	底刃 End Teeth	前角 Rake Angle
加工10小时后的 磨损情况 State of damage after 10 hours of machining			
后刀面磨损量 Flank wear	0.062mm	0.087mm	

测试结束后(10小时), 刃尖无异常剥离, 保持良好的磨损状态。与其他公司金刚石涂层球头铣刀相比, 可大幅度缩短加工时间。

After finish machining of 10 hours, cutting edge was in good shape with normal wear. No abnormal peel off of coating was found. By applying PFR-D, machining time was drastically reduced versus the competitor's diamond coated ball end mill.



测试工件形状  
Shape of Test Piece

# » Phoenix SF


螺纹安装型  
Screw Fit Type

Screw Fit



## Specification

■形状尺寸表 Specification

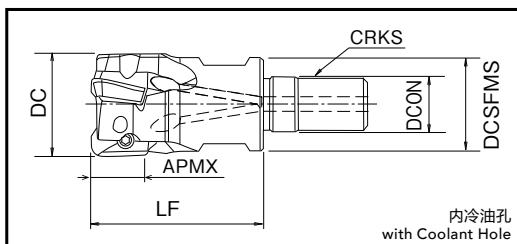

PSE 螺纹安装型 Screw Fit Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEPF	装夹直径 DCON	螺纹尺寸 CRKS	扳手尺寸 Spanner Size	全长 LF	端面直径 DCSFMS	APMX	重量 (kg)	适用柄部 类型 Applicable Shank
7801600	PSE11R016SF8-2	16	2	8.5	M8	10	27	14.5	10	0.03	③
7801612	PSE11R017SF8-2	★ 17	2	8.5	M8	10	27	14.5	10	0.03	
7801613	PSE11R018SF8-2	★ 18	2	8.5	M8	10	27	14.5	10	0.03	
7801601	PSE11R020SF10-3	20	3	10.5	M10	14	33	18	10	0.06	④
7801614	PSE11R021SF10-3	★ 21	3	10.5	M10	14	33	18	10	0.06	
7801615	PSE11R022SF10-3	★ 22	3	10.5	M10	14	33	18	10	0.06	
7801602	PSE11R025SF12-4	25	4	12.5	M12	17	35	23	10	0.10	⑤
7801616	PSE11R026SF12-3	★ 26	3	12.5	M12	17	35	23	10	0.10	
7801603	PSE11R028SF12-4	★ 28	4	12.5	M12	17	35	23	10	0.11	
7801604	PSE11R032SF16-5	32	5	17	M16	22	40	28	10	0.19	⑥
7801617	PSE11R033SF16-3	★ 33	3	17	M16	22	40	28	10	0.20	
7801605	PSE11R035SF16-5	★ 35	5	17	M16	22	40	28	10	0.20	
7801606	PSE11R040SF16-6	40	6	17	M16	22	40	28	10	0.22	⑥
7801607	PSE15R025SF12-2	25	2	12.5	M12	17	35	23	14	0.09	
7801618	PSE15R026SF12-2	★ 26	2	12.5	M12	17	35	23	14	0.10	
7801608	PSE15R028SF12-2	★ 28	2	12.5	M12	17	35	23	14	0.10	⑤
7801609	PSE15R032SF16-3	32	3	17	M16	22	40	28	14	0.17	
7801619	PSE15R033SF16-3	★ 33	3	17	M16	22	40	28	14	0.18	
7801610	PSE15R035SF16-3	★ 35	3	17	M16	22	40	28	14	0.18	⑥
7801611	PSE15R040SF16-4	40	4	17	M16	22	40	28	14	0.20	

刀片及零部件请查阅P.90~P.94。  
See p.90-p.94 for inserts and accessories.

刀具刀杆, 刀柄请参考P.190~192。  
See p.190-p.192 for shank holders.

### ★ PSE 粗刃型 Reduced Shank Type


·粗刃型的刀具外径大于柄径, 使其在模具零件等的深壁加工、型腔加工中最为适合。

·The outer diameter of the reduced shank type is larger than the shank diameter, making it highly effective in the processing of die and mold applications that require vertical wall milling or pocketing.

例  
Example



### 形状尺寸表 Specification

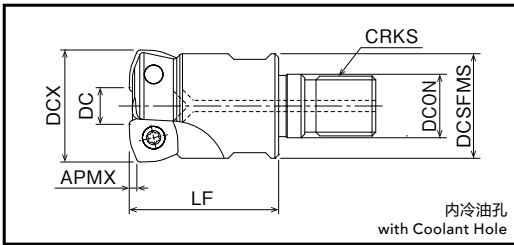

### PHC 螺纹安装型 Screw Fit Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	刀具外径 DCX	外径 DC	刃数 ZEPF	装夹直径 DCON	螺纹尺寸 CRKS	扳手尺寸 Spanner Size	全长 LF	端面直径 DCSFMS	APMX	重量 (kg)	适用柄部 类型 Applicable Shank
7801520	PHC07R016SF8-2	16	7.4	2	8.5	M8	10	27	14.5	0.8	0.03	③
7801521	PHC07R017SF8-2	★ 17	8.4	2	8.5	M8	10	27	14.5	0.8	0.03	
7801522	PHC07R018SF8-2	★ 18	9.4	2	8.5	M8	10	27	14.5	0.8	0.03	
7801523	PHC07R020SF10-3	20	11.4	3	10.5	M10	14	33	18	0.8	0.06	④
7801524	PHC07R021SF10-3	★ 21	12.4	3	10.5	M10	14	33	18	0.8	0.06	
7801525	PHC07R022SF10-3	★ 22	13.4	3	10.5	M10	14	33	18	0.8	0.06	
7801526	PHC07R025SF12-4	25	16.4	4	12.5	M12	17	35	23	0.8	0.10	⑤
7801527	PHC07R026SF12-4	★ 26	17.4	4	12.5	M12	17	35	23	0.8	0.10	
7801528	PHC07R028SF12-4	★ 28	19.4	4	12.5	M12	17	35	23	0.8	0.11	
7801529	PHC07R030SF16-4	30	21.4	4	17	M16	22	40	28	0.8	0.20	⑥
7801530	PHC07R032SF16-5	32	23.4	5	17	M16	22	40	28	0.8	0.18	
7801531	PHC07R033SF16-5	★ 33	24.4	5	17	M16	22	40	28	0.8	0.18	
7801532	PHC07R035SF16-5	★ 35	26.4	5	17	M16	22	40	28	0.8	0.20	
7801500	PHC09R025SF12-3	25	13.2	3	12.5	M12	17	35	23	1	0.10	⑤
7801510	PHC09R026SF12-3	★ 26	14.2	3	12.5	M12	17	35	23	1	0.11	
7801501	PHC09R028SF12-3	★ 28	16.2	3	12.5	M12	17	35	23	1	0.11	
7801502	PHC09R030SF16-3	30	18.2	3	17	M16	22	40	28	1	0.17	⑥
7801503	PHC09R032SF16-3	32	20.2	3	17	M16	22	40	28	1	0.18	
7801511	PHC09R033SF16-3	★ 33	21.2	3	17	M16	22	40	28	1	0.19	
7801504	PHC09R035SF16-3	★ 35	23.2	3	17	M16	22	40	28	1	0.19	
7801505	PHC09R040SF16-4	40	28.2	4	17	M16	22	40	28	1	0.22	⑥
7801506	PHC12R030SF16-2	30	13.4	2	17	M16	22	40	28	2	0.17	
7801507	PHC12R032SF16-2	32	15.4	2	17	M16	22	40	28	2	0.18	
7801512	PHC12R033SF16-2	★ 33	16.4	2	17	M16	22	40	28	2	0.19	
7801508	PHC12R035SF16-3	★ 35	18.4	3	17	M16	22	40	28	2	0.18	
7801509	PHC12R040SF16-3	40	23.4	3	17	M16	22	40	28	2	0.22	

刀片及零部件请查阅 P.126。  
See p.126 for inserts and accessories.  
刀具刀杆, 刀柄请参考 P.190~192。  
See p.190-p.192 for shank holders.

### ★ PHC 粗刃型 Reduced Shank Type

·粗刃型的刀具外径大于柄径, 使其在模具零件等的深壁加工、型腔加工中最为适合。

·The outer diameter of the reduced shank type is larger than the shank diameter, making it highly effective in the processing of die and mold applications that require vertical wall milling or pocketing.

例  
Example



# Phoenix


螺纹安装型

Screw Fit Type

## SF

## Specification

■形状尺寸表 Specification

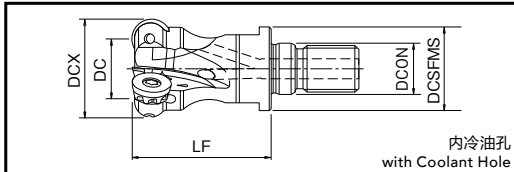


PRC 螺纹安装型 Screw Fit Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	刀具外径 DCX	外径 DC	刃数 ZEPF	装夹直径 DCON	螺纹尺寸 CRKS	扳手尺寸 Spanner Size	全长 LF	端面直径 DCSFMS	重量 (kg)	适用柄部类型 Applicable Shank
7801700	PRC10R020SF10-2	20	10	2	10.5	M10	14	33	18	0.06	④
7801701	PRC10R025SF12-3	25	15	3	12.5	M12	17	35	23	0.09	⑤
7801702	PRC10R030SF16-3	30	20	3	17	M16	22	40	28	0.16	⑥
7801703	PRC10R032SF16-4	32	22	4	17	M16	22	40	28	0.17	
7801704	PRC10R040SF16-4	40	30	4	17	M16	22	40	28	0.21	⑥
7801705	PRC12R030SF16-2	30	18	2	17	M16	22	40	28	0.16	
7801706	PRC12R032SF16-3	32	20	3	17	M16	22	40	28	0.16	
7801707	PRC12R040SF16-3	40	28	3	17	M16	22	40	28	0.22	

刀片及零部件请查P.137。 See p.137 for inserts and accessories.  
刀具刀杆, 刀柄请参考P.190~192。 See p.190-p.192 for shank holders.

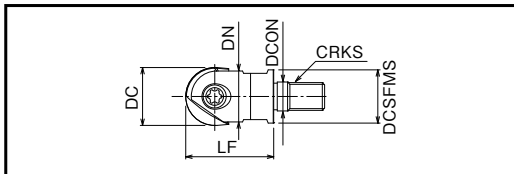


PFB 螺纹安装型 Screw Fit Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEPF	装夹直径 DCON	螺纹尺寸 CRKS	扳手尺寸 Spanner Size	全长 LF	颈径 DN	端面直径 DCSFMS	适用柄部类型 Applicable Shank
7801490	PFB-R100SF6	10	2	6.5	M6	7	26	9	9	①
7801491	PFB-R120SF6	12	2	6.5	M6	7	26	11	11	②
7801492	PFB-R160SF8	16	2	8.5	M8	10	32	14	14.5	③
7801493	PFB-R200SF10	20	2	10.5	M10	14	38	18	18	④
7801494	PFB-R250SF12	25	2	12.5	M12	17	38	22	23	⑤
7801495	PFB-R300SF16	30	2	17	M16	22	43	27	28	⑥

刀片及零部件请查阅P.164~P.165。 See p.164-p.165 for inserts and accessories.  
刀具刀杆, 刀柄请参考P.190~192。 See p.190-p.192 for shank holders.

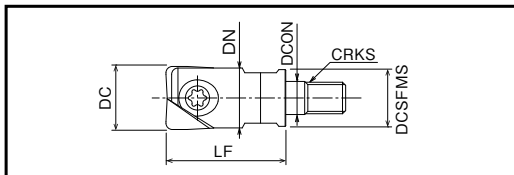

PFR 螺纹安装型 Screw Fit Type


单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	刃数 ZEPF	装夹直径 DCON	螺纹尺寸 CRKS	扳手尺寸 Spanner Size	全长 LF	颈径 DN	端面直径 DCSFMS	适用柄部类型 Applicable Shank
7832090	PFR-R100SF6	10	2	6.5	M6	7	26	9	9	①
7832091	PFR-R120SF6	12	2	6.5	M6	7	26	11	11	②
7832092	PFR-R160SF8	16	2	8.5	M8	10	32	15	14.5	③
7832093	PFR-R200SF10	20	2	10.5	M10	14	38	19	18	④
7832094	PFR-R250SF12	25	2	12.5	M12	17	38	24	23	⑤
7832095	PFR-R300SF16	30	2	17	M16	22	43	29	28	⑥
7832096	PFR-R320SF16	32	2	17	M16	22	43	31	28	⑥

刀片及零部件请查阅P.174~P.179。 See p.174-p.179 for inserts and accessories.  
刀具刀杆, 刀柄请参考P.190~192。 See p.190-p.192 for shank holders.

# Specification

■形状尺寸表 Specification

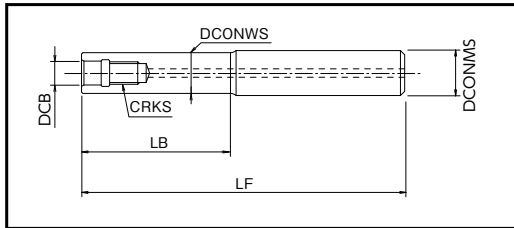

螺纹安装型专用直柄刀杆 Straight Shank Holder for Screw Fit Type

钢制刀杆 Steel Shank

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	柄径 DCONMS	颈径 DCONWS	螺纹尺寸 CRKS	装夹直径 DCB	全长 LF	颈长 LB
①	7801904 SF-M06SS10-4	10	9	M6	6.5	104	2.3
②	7801905 SF-M06SS12-10	12	11	M6	6.5	104	8.3
③	7801900 SF-M08SS16-15	16	14.5	M8	8.5	95	13
④	7801901 SF-M10SS20-20	20	18	M10	10.5	120	17.7
⑤	7801902 SF-M12SS25-35	25	23	M12	12.5	135	32.7
⑥	7801903 SF-M16SS32-35	32	28	M16	17	155	32.1



整体硬质合金刀杆 All Carbide Shank

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	柄径 DCONMS	颈径 DCONWS	螺纹尺寸 CRKS	装夹直径 DCB	全长 LF	颈长 LB
①	7801918 SF-M06SS10-24CS	10	9	M6	6.5	124	22.3
②	7801919 SF-M06SS12-34CS	12	11	M6	6.5	134	32.3
③	7801910 SF-M08SS16-55CS	16	14.5	M8	8.5	115	53
	7801911 SF-M08SS16-85CS					145	83
④	7801912 SF-M10SS20-70CS	20	18	M10	10.5	140	67.7
	7801913 SF-M10SS20-110CS					180	107.7
⑤	7801914 SF-M12SS25-90CS	25	23	M12	12.5	170	87.7
	7801915 SF-M12SS25-140CS					220	137.7
⑥	7801916 SF-M16SS32-120CS	32	28	M16	17	220	117.1
	7801917 SF-M16SS32-190CS					290	187.1

# Phoenix


螺纹安装型专用刀柄

Holder for Screw Fit Type

## OP-SFA

## Specification

■形状尺寸表 Specification

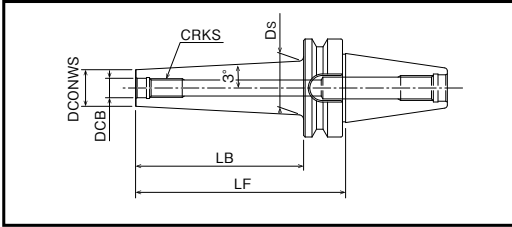


BT 刀柄 BT Shank Holder

单位:mm Unit:mm

	商品号 EDP No.	名称 Designation	颈径 DCONWS	螺纹尺寸 CRKS	装夹直径 DCB	悬长 LF	颈长 LB	颈口径 Ds	库存 Stock
③	7802500	BT30-SFA8-45	14.5	M8	8.5	45	23	16	※
	7802501	BT30-SFA8-85				85	63	21.1	※
④	7802502	BT30-SFA10-45	18.5	M10	10.5	45	23	20	※
	7802503	BT30-SFA10-85				85	63	25.1	※
⑤	7802504	BT30-SFA12-45	23.5	M12	12.5	45	23	25	※
	7802505	BT30-SFA12-85				85	63	30.1	※
⑥	7802506	BT30-SFA16-45	29	M16	17	45	23	32	※
	7802507	BT30-SFA16-85				85	63	32	※
③	7802508	BT40-SFA8-45	14.5	M8	8.5	45	18	16	※
	7802509	BT40-SFA8-85				85	58	20.5	※
④	7802510	BT40-SFA10-45	18.5	M10	10.5	45	18	20	※
	7802511	BT40-SFA10-85				85	58	24.5	※
⑤	7802512	BT40-SFA12-45	23.5	M12	12.5	45	18	25	※
	7802513	BT40-SFA12-85				85	58	29.5	※
	7802514	BT40-SFA12-135				135	108	34.8	※
⑥	7802515	BT40-SFA16-45	29	M16	17	45	18	32	※
	7802516	BT40-SFA16-85				85	58	35	※
	7802517	BT40-SFA16-135				135	108	40.3	※
③	7802518	BT50-SFA8-85	14.5	M8	8.5	85	47	19.4	※
	7802519	BT50-SFA8-135				135	97	24.6	※
④	7802520	BT50-SFA10-85	18.5	M10	10.5	85	47	20	※
	7802521	BT50-SFA10-135				135	97	28.6	※
⑤	7802522	BT50-SFA12-85	23.5	M12	12.5	85	47	25	※
	7802523	BT50-SFA12-135				135	97	33.6	※
	7802524	BT50-SFA12-185				185	147	38.9	※
	7802525	BT50-SFA12-250				250	212	45.7	※
	7802526	BT50-SFA12-300				300	262	50.9	※
⑥	7802527	BT50-SFA16-85	29	M16	17	85	47	32	※
	7802528	BT50-SFA16-135				135	97	39.1	※
	7802529	BT50-SFA16-185				185	147	44.4	※
	7802530	BT50-SFA16-250				250	212	51.2	※
	7802531	BT50-SFA16-300				300	262	56.4	※

■形状尺寸表 Specification

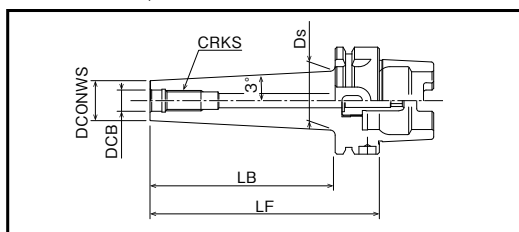

HSK 刀柄 HSK Shank Holder

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	颈径 DCONWS	螺纹尺寸 CRKS	装夹直径 DCB	悬长 LF	颈长 LB	颈口径 Ds	库存 Stock
③	7802550	14.5	M8	8.5	45	19	16	※
	7802551				85	59	20.6	※
④	7802552	18.5	M10	10.5	60	34	20	※
	7802553				85	59	24.6	※
⑤	7802554	23.5	M12	12.5	60	34	25	※
	7802555				85	59	29.6	※
	7802556				135	109	34.9	※
⑥	7802557	29	M16	17	60	34	32	※
	7802558				85	59	32	※
	7802559				135	109	40.4	※
③	7802560	14.5	M8	8.5	85	50	19.7	※
	7802561				135	100	24.9	※
④	7802562	18.5	M10	10.5	85	50	23.7	※
	7802563				135	100	28.9	※
⑤	7802564	23.5	M12	12.5	85	50	28.7	※
	7802565				135	100	33.9	※
	7802566				185	150	39.2	※
	7802567				250	221	46.6	※
	7802568				300	271	51.9	※
⑥	7802569	29	M16	17	85	50	34.2	※
	7802570				135	106	40.1	※
	7802571				185	156	45.3	※
	7802572				250	221	52.1	※
	7802573				300	271	57.4	※


※=交货期请咨询本公司营业人员。※=Please contact our sales department for lead time

# Phoenix PXM

可换头式铣刀  
Exchangeable Head End Mill

Phoenix Exchangeable Milling

(PAT. in Japan)

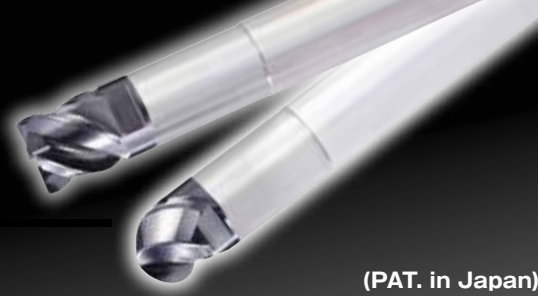

## 特点 Features

**将整体硬质合金铣刀的设计·实绩·技术有效利用于可换头式铣刀的刃型**

·可对应各种加工

All the knowledge and know-how acquired by designing solid carbide end mills are found in these exchangeable heads.  
·Various types are available to meet variety of machining methods.

**端面 + 锥部 = 双面紧固**

- 确保高刚性和精度
- 外周刃振动精度：0.015mm 以下
- 刀头交换精度(轴向) ±0.03mm

End Face + Tapper = Double Face Clamping

- High rigidity and accuracy of tightening
- High precision of run out ≤0.015mm
- High head replacing accuracy = ±0.03mm



**使用PXM专用扳手紧固**

Tighten by the spanner exclusive for PXM.  
(Sold separately from the cutters)

**采用锯齿螺纹**

- 刀头装卸方便
- 缩短刀具更换时间

Applying buttress screw makes easy and reduces time to desorb heads.

与整体式刀具的对比  
Compared to solid tools

在大径方面很具性价比。只需交换头部即可，可缩短换刀时间  
The large diameter offers cost advantages. To reduce the tool changing time, only the cutter chip needs to be replaced.

与可转位式刀具的对比  
Compared to indexable tools

由于刃数优势，提高了生产性。刃尖的自由度。初期成本、运转成本上有很大优势。  
It provides flute quantity advantages to improve productivity, as well as a selection of cutter chips. It offers additional advantages in terms of initial costs and running costs.

## 刀头类型

Line up of exchangeable heads



<b>PXSE</b>	不等分割 4刃 平头·圆弧角型 Unequal Spacing, Four Flutes, Square-Corner Radius Type	作为通用工具使用，从槽加工到侧面加工，可以进行重切削。 As a general-purpose tool, it can be used for heavy cutting from grooves to side faces.
<b>PXVC</b>	不等导程 4刃 大螺旋角 平头·圆弧角型 Variable Lead, Four Flutes, High Helix, Square-Corner Radius Type	稳定加工悬长长的工件。 Stable machining with long overhang length.
<b>PXSM</b>	不等分割 多刃 平头·圆弧角型 Unequal Spacing, Multiple Flutes, Square-Corner Radius Type	作为通用工具使用，能利用多刃优势进行加工。 As a general-purpose tool, it can bring the advantages of multiple cutters into full play.
<b>PXNH</b>	不等导程 4刃 大螺旋角 粗加工型 Variable Lead, Four Flutes, High Helix, Roughing Type	在广泛的切削领域能进行粗加工。 Suitable for rough milling in a wide range of cutting conditions.
<b>PXNL</b>	不等导程 4刃 小螺旋角 粗加工型 Variable Lead, Four Flutes, Low Helix, Roughing Type	能进行长寿命的粗加工。 Suitable for rough milling with a long tool life.
<b>PXRE</b>	直刃 圆弧角型 Straight Flutes, Corner Radius Type	可针对高硬度材料加工。 It can mill high hardness materials.
<b>PXDR-P</b>	3刃 多功能型 圆弧角型 Three Flutes, Multi-purpose, Corner Radius Type	稳定加工悬长长的工件。 Suitable for machining work which requires long overhang length.
<b>PXDR-N</b>	3刃 耐久型 圆弧角型 Three Flutes, Heavy-duty, Corner Radius Type	仿形加工长寿命。 Suitable for profile milling with long tool life.
<b>PXBE-P</b>	3刃 多功能型 球头型 Three Flutes, Multi-purpose, Ball Type	稳定加工悬长长的工件。 Suitable for machining work which requires long overhang length.
<b>PXBE-N</b>	3刃 耐久型 球头型 Three Flutes, Heavy-duty, Ball Type	仿形加工长寿命。 Suitable for profile milling with long tool life.
<b>PXBM</b>	多刃 球头型 Multiple Flutes, Ball Type	可进行中粗加工及精加工。 It can be used for intermediate-finish and finish milling.

# Features



## ■ PXM系列 按形状分类导览图

Group map by types of exchangeable heads


### ■ 平头型 Square Type

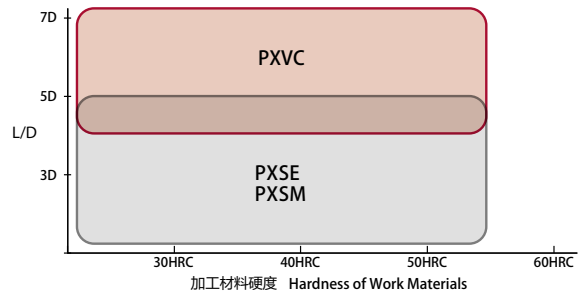



### ■ 粗加工型 Roughing Type

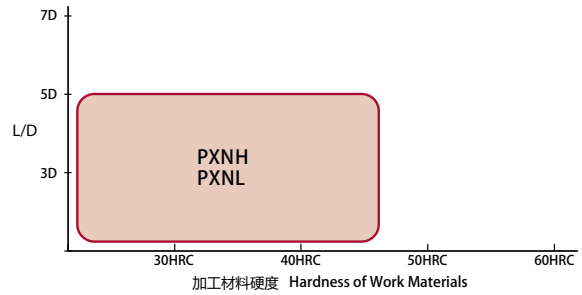

### ■ 圆弧角型 Corner Radius Type

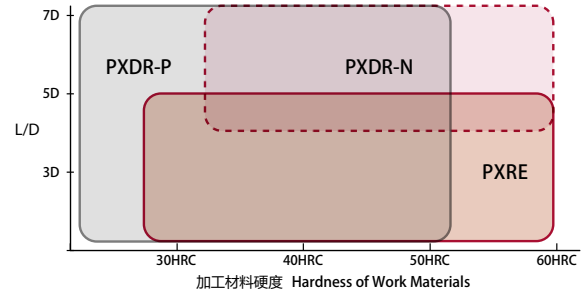

### ■ 球头型 Ball Type

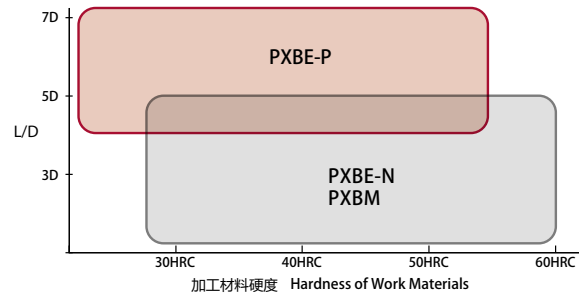


# Phoenix PXM

平头·圆弧角型

Square · Corner Radius Type

## PXSE

## Specification



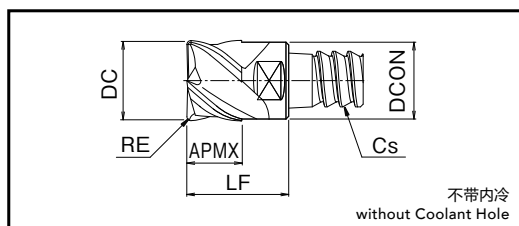


不带内冷 without Coolant Hole

PXSE 不等分割 4刃 平头·圆弧角型 Unequal Spacing, Four Flutes, Square · Corner Radius Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	圆弧半径 RE	刃数 ZEF	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7829994	PXSE100C10-04R000	10	0	4	7	13	9.7	38°	C10	XP3225
<b>NEW</b> 7829995	PXSE100C10-04R005		0.5							
<b>NEW</b> 7829996	PXSE100C10-04R010		1							
<b>NEW</b> 7829997	PXSE100C10-04R020		2							
<b>NEW</b> 7829998	PXSE100C10-04R030		3							
7830004	PXSE120C12-04R000	12	0	4	8.4	14.4	11.7	38°	C12	XP3225
7830005	PXSE120C12-04R005		0.5							
7830006	PXSE120C12-04R010		1							
7830007	PXSE120C12-04R020		2							
7830008	PXSE120C12-04R030		3							
7830009	PXSE160C16-04R000	16	0	4	11.2	18.7	15.7	38°	C16	XP3225
7830010	PXSE160C16-04R005		0.5							
7830011	PXSE160C16-04R010		1							
7830012	PXSE160C16-04R015		1.5							
7830013	PXSE160C16-04R020		2							
7830014	PXSE160C16-04R030	3								
7830015	PXSE200C20-04R000	20	0	4	14	21.5	19.6	38°	C20	XP3225
7830016	PXSE200C20-04R005		0.5							
7830017	PXSE200C20-04R010		1							
7830018	PXSE200C20-04R020		2							
7830019	PXSE200C20-04R030		3							
7830020	PXSE250C25-04R000	25	0	4	17.5	27.5	24	38°	C25	XP3225
7830021	PXSE250C25-04R010		1							
7830022	PXSE250C25-04R020		2							
7830023	PXSE250C25-04R030		3							

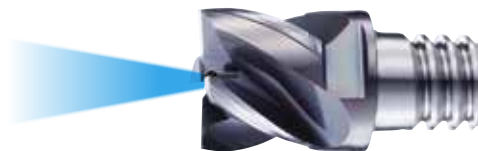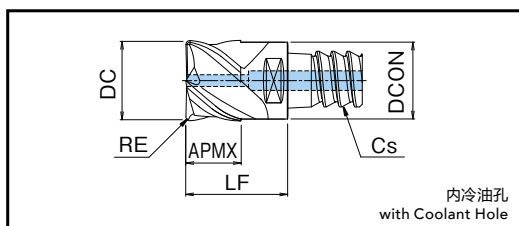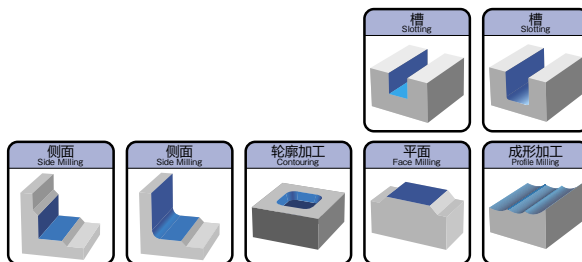

## 内冷油孔 with Coolant Hole

PXSE 不等分割 4刃 平头·圆弧角型 Unequal Spacing, Four Flutes, Square · Corner Radius Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	圆弧半径 RE	刃数 ZFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830054	PXSE120C12-04R00-O	12	0	4	8.4	14.4	11.7	38°	C12	XP3225
<b>NEW</b> 7830056	PXSE120C12-04R01-O		1							
<b>NEW</b> 7830058	PXSE120C12-04R03-O		3							
<b>NEW</b> 7830059	PXSE160C16-04R00-O	16	0	4	11.2	18.7	15.7	38°	C16	XP3225
<b>NEW</b> 7830061	PXSE160C16-04R01-O		1							
<b>NEW</b> 7830064	PXSE160C16-04R03-O		3							
<b>NEW</b> 7830065	PXSE200C20-04R00-O	20	0	4	14	21.5	19.6	38°	C20	XP3225
<b>NEW</b> 7830067	PXSE200C20-04R01-O		1							
<b>NEW</b> 7830069	PXSE200C20-04R03-O		3							
<b>NEW</b> 7830070	PXSE250C25-04R00-O	25	0	4	17.5	27.5	24	38°	C25	XP3225
<b>NEW</b> 7830071	PXSE250C25-04R01-O		1							
<b>NEW</b> 7830074	PXSE250C25-04R03-O		3							

1. 使用内部给油时, 请使用带内冷油孔的刀头和刀杆。有关刀杆的详细信息, 请参阅 p.208 · p.210。

1. For the use of internal coolant, please use the appropriate head and shank holders with oil hole. Refer to pages 208 and 210 for details on shank holders.



# Phoenix PXM

平头·圆弧角型

Square · Corner Radius Type

## PXVC

## Specification

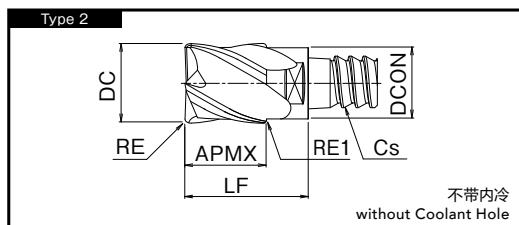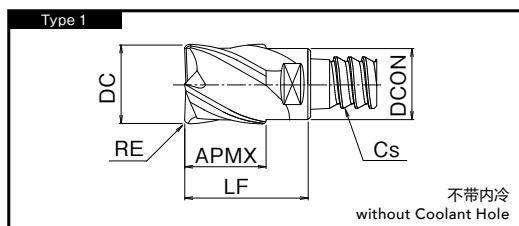

不带内冷 without Coolant Hole

PXVC 不等导程 4刃 大螺旋角 平头·圆弧角型 Variable Lead, Four Flutes, High helix, Square · Corner Radius Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	圆弧半径 RE	刃数 ZEFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades	形状 Type
<b>NEW</b> 7834994	PXVC100C10-04R000	10	0	4	10	16	9.8	45/48°	C10	XP3225	1
<b>NEW</b> 7834995	PXVC100C10-04R005		0.5								
<b>NEW</b> 7834996	PXVC100C10-04R010		1								
<b>NEW</b> 7834997	PXVC100C10-04R020		2								
<b>NEW</b> 7834998	PXVC100C10-04R030		3								
<b>NEW</b> 7834999	PXVC120C10-04R000	★ 12	0	4	12	18	9.8	45/48°	C10	XP3225	2
<b>NEW</b> 7835000	PXVC120C10-04R005		0.5								
<b>NEW</b> 7835001	PXVC120C10-04R010		1								
<b>NEW</b> 7835002	PXVC120C10-04R020		2								
<b>NEW</b> 7835003	PXVC120C10-04R030		3								
7835004	PXVC120C12-04R000	12	0	4	12	18	11.7	45/48°	C12	XP3225	1
7835005	PXVC120C12-04R005		0.5								
7835006	PXVC120C12-04R010		1								
7835007	PXVC120C12-04R020		2								
7835008	PXVC120C12-04R030		3								
7835009	PXVC140C12-04R000	★ 14	0	4	14	20	11.7	45/48°	C12	XP3225	2
7835010	PXVC140C12-04R005		0.5								
7835011	PXVC140C12-04R010		1								
7835012	PXVC140C12-04R020		2								
7835013	PXVC140C12-04R030		3								


**NEXT** →

### ★ PXVC粗刃型 Reduced Shank Type

·粗刃型的刀具外径大于柄径，使其在模具零件等的深壁加工、型腔加工中最为适合。

·The outer diameter of the reduced shank type is larger than the shank diameter, making it highly effective in the processing of die and mold applications that require vertical wall milling or pocketing.

例  
Example

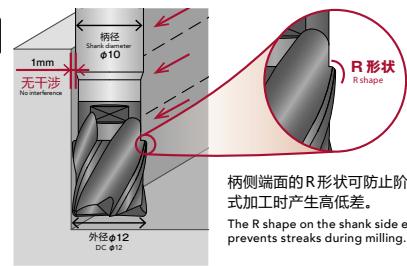

◀ FROM

PXVC 不等导程 4刃 大螺旋角 平头·圆弧角型 Variable Lead, Four Flutes, High helix, Square · Corner Radius Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	圆弧半径 RE	刃数 ZFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades	形状 Type
7835014	PXVC160C16-04R000	16	0	4	16	23.5	15.7	45/48°	C16	XP3225	1
7835015	PXVC160C16-04R005		0.5								
7835016	PXVC160C16-04R010		1								
7835017	PXVC160C16-04R015		1.5								
7835018	PXVC160C16-04R020		2								
7835019	PXVC160C16-04R030		3								
7835020	PXVC180C16-04R000	★ 18	0	4	18	25.5	15.7	45/48°	XP3225	2	
7835021	PXVC180C16-04R005		0.5								
7835022	PXVC180C16-04R010		1								
7835023	PXVC180C16-04R020		2								
7835024	PXVC180C16-04R030		3								
7835025	PXVC200C20-04R000	20	0	4	20	27.5	19.6	45/48°	C20	XP3225	1
7835026	PXVC200C20-04R005		0.5								
7835027	PXVC200C20-04R010		1								
7835028	PXVC200C20-04R020		2								
7835029	PXVC200C20-04R030		3								
7835030	PXVC220C20-04R000		★ 22								
7835038	PXVC220C20-04R005	0.5									
7835031	PXVC220C20-04R010	1									
7835032	PXVC220C20-04R020	2									
7835033	PXVC220C20-04R030	3									
7835034	PXVC250C25-04R000	25		0	4	25	35	24	45/48°	C25	XP3225
7835035	PXVC250C25-04R010		1								
7835036	PXVC250C25-04R020		2								
7835037	PXVC250C25-04R030		3								
NEW 7835039	PXVC320C32-05R010		32	1							
NEW 7835040	PXVC320C32-08R010	8		38°							

库存种类都为○(即标准库存品)。 Stock are categorized as ○ (Standard stock item).


# Phoenix PXM

平头·圆弧角型

Square · Corner Radius Type

## PXSM

## Specification

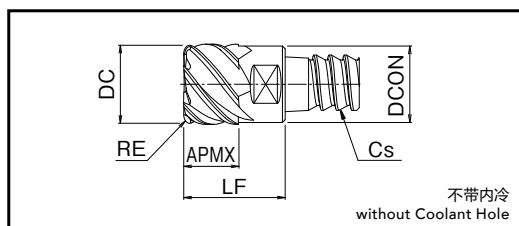




### 不带内冷 without Coolant Hole

PXSM 不等分割 多刃 平头·圆弧角型 Unequal Spacing, Multiple Flutes, Square · Corner Radius Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	圆弧半径 RE	刃数 Z/F/P	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830094	PXSM100C10-06R000	10	0	6	7	13	9.7	38°	C10	XP3225
<b>NEW</b> 7830095	PXSM100C10-06R005		0.5							
<b>NEW</b> 7830096	PXSM100C10-06R010		1							
<b>NEW</b> 7830097	PXSM100C10-06R020		2							
7830104	PXSM120C12-06R000	12	0	6	8.4	14.4	11.7	38°	C12	XP3225
7830105	PXSM120C12-06R005		0.5							
7830106	PXSM120C12-06R010		1							
7830107	PXSM120C12-06R020		2							
7830108	PXSM120C12-06R030		3							
7830109	PXSM160C16-06R000	16	0	6	11.2	18.7	15.7	38°	C16	XP3225
7830110	PXSM160C16-06R005		0.5							
7830111	PXSM160C16-06R010		1							
7830112	PXSM160C16-06R015		1.5							
7830113	PXSM160C16-06R020		2							
7830114	PXSM160C16-06R030		3							
7830115	PXSM160C16-08R000		0	8	11.2	18.7	15.7	42°	C16	XP3225
7830116	PXSM160C16-08R005		0.5							
7830117	PXSM160C16-08R010		1							
7830118	PXSM160C16-08R015		1.5							
7830119	PXSM160C16-08R020		2							
7830120	PXSM160C16-08R030		3							

**NEXT**



## FROM

PXSM 不等分割 多刃 平头·圆弧角型 Unequal Spacing, Multiple Flutes, Square · Corner Radius Type

单位:mm Unit:mm


商品号 EDP No.	名称 Designation	外径 DC	圆弧半径 RE	刃数 ZEFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
7830121	PXSM200C20-10R000	20	0	10	14	21.5	19.6	42°	C20	XP3225
7830122	PXSM200C20-10R005		0.5							
7830123	PXSM200C20-10R010		1							
7830124	PXSM200C20-10R020		2							
7830125	PXSM200C20-10R030		3							
7830126	PXSM250C25-10R000	25	0	10	17.5	27.5	24	42°	C25	XP3225
7830127	PXSM250C25-10R010		1							
7830128	PXSM250C25-10R020		2							
7830129	PXSM250C25-10R030		3							

# Phoenix PXM


粗加工型

Roughing Type

## PXNH



## Specification

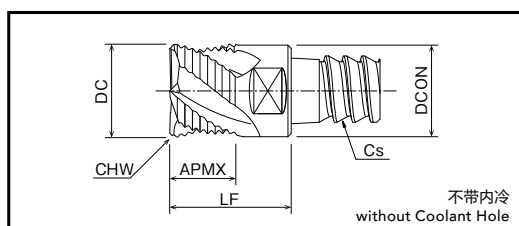


### 不带内冷 without Coolant Hole

PXNH 不等导程 4刃 大螺旋角 粗加工型 Variable Lead, Four Flutes, High Helix, Roughing Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	圆弧倒角 宽度 CHW	刃数 ZEPF	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830450	PXNH100C10-04C005	10	0.5	4	7	13	9.7	40/42°	C10	XP3225
7830451	PXNH120C12-04C005	12	0.5	4	8.4	14.4	11.7	40/42°	C12	XP3225
7830452	PXNH160C16-04C006	16	0.6	4	11.2	18.7	15.7	40/42°	C16	XP3225
7830453	PXNH200C20-04C006	20	0.6	4	14	21.5	19.6	40/42°	C20	XP3225
7830454	PXNH250C25-04C006	25	0.6	4	17.5	27.5	24	40/42°	C25	XP3225

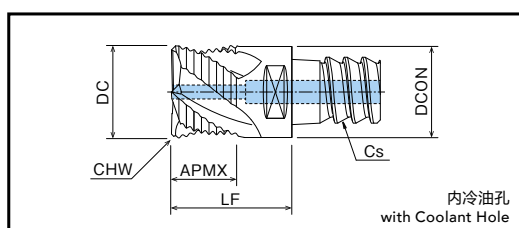

### 内冷油孔 with Coolant Hole

PXNH 不等导程 4刃 大螺旋角 粗加工型 Variable Lead, Four Flutes, High Helix, Roughing Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	圆弧倒角 宽度 CHW	刃数 ZEPF	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830461	PXNH120C12-04C005-O	12	0.5	4	8.4	14.4	11.7	40/42°	C12	XP3225
<b>NEW</b> 7830462	PXNH160C16-04C006-O	16	0.6	4	11.2	18.7	15.7	40/42°	C16	XP3225
<b>NEW</b> 7830463	PXNH200C20-04C006-O	20	0.6	4	14	21.5	19.6	40/42°	C20	XP3225
<b>NEW</b> 7830464	PXNH250C25-04C006-O	25	0.6	4	17.5	27.5	24	40/42°	C25	XP3225


1. 使用内部给油时, 请使用带内冷油孔的刀头和刀杆。有关刀杆的详细信息, 请参阅 p.208 · p210。

1. For the use of internal coolant, please use the appropriate head and shank holders with oil hole. Refer to pages 208 and 210 for details on shank holders.


# Phoenix PXM

粗加工型  
Roughing Type

## PXNL

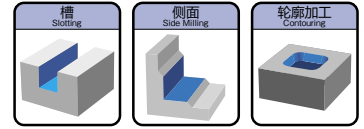

## Specification

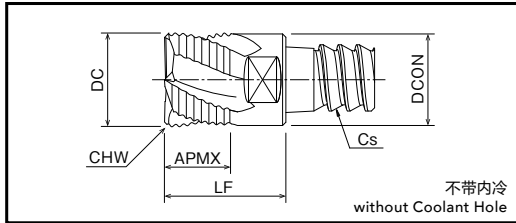


### 不带内冷 without Coolant Hole

PXNL 不等导程 4刃 小螺旋角 粗加工型 Variable Lead, Four Flutes, Low Helix, Roughing Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	圆弧倒角 宽度 CHW	刃数 ZEFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830400	PXNL100C10-04C005	10	0.5	4	7	13	9.7	19/21°	C10	XP3225
7830401	PXNL120C12-04C005	12	0.5	4	8.4	14.4	11.7	19/21°	C12	XP3225
7830402	PXNL160C16-04C006	16	0.6	4	11.2	18.7	15.7	19/21°	C16	XP3225
7830403	PXNL200C20-04C006	20	0.6	4	14	21.5	19.6	19/21°	C20	XP3225
7830404	PXNL250C25-04C006	25	0.6	4	17.5	27.5	24	19/21°	C25	XP3225

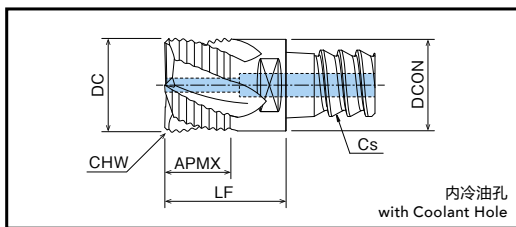

### 内冷油孔 with Coolant Hole

PXNL 不等导程 4刃 小螺旋角 粗加工型 Variable Lead, Four Flutes, Low Helix, Roughing Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	圆弧倒角 宽度 CHW	刃数 ZEFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830411	PXNL120C12-04C005-O	12	0.5	4	8.4	14.4	11.7	19/21°	C12	XP3225
<b>NEW</b> 7830412	PXNL160C16-04C006-O	16	0.6	4	11.2	18.7	15.7	19/21°	C16	XP3225
<b>NEW</b> 7830413	PXNL200C20-04C006-O	20	0.6	4	14	21.5	19.6	19/21°	C20	XP3225
<b>NEW</b> 7830414	PXNL250C25-04C006-O	25	0.6	4	17.5	27.5	24	19/21°	C25	XP3225


1. 使用内部给油时, 请使用带内冷油孔的刀头和刀杆。有关刀杆的详细信息, 请参阅p.208·p210。
1. For the use of internal coolant, please use the appropriate head and shank holders with oil hole. Refer to pages 208 and 210 for details on shank holders.

# Phoenix PXM


圆弧角型

Corner Radius Type

## PXRE

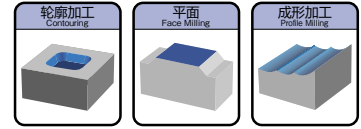

## Specification

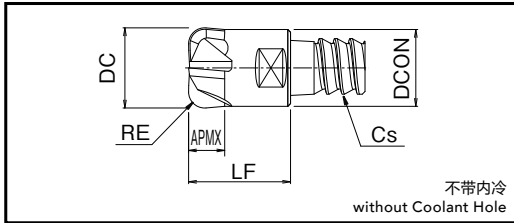

不带内冷 without Coolant Hole

PXRE 直刃 圆弧角型 Straight Flutes, Corner Radius Type


单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	圆弧半径 RE	刃数 ZEFF	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830200	PXRE100C10-04R020	10	2	4	4.5	13	9.7	—	C10	XP6305
7830201	PXRE120C12-04R020	12	2	4	5	14.4	11.7	—	C12	XP6305
7830202	PXRE160C16-06R030	16	3	6	7	18.7	15.7	—	C16	XP6305
7830203	PXRE200C20-06R030	20	3	6	10	21.5	19.6	—	C20	XP6305


# Phoenix PXM

圆弧角型  
Corner Radius Type

## PXDR

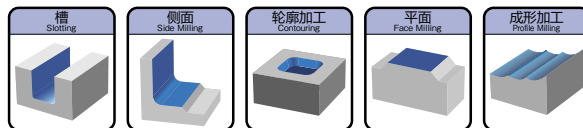

## Specification

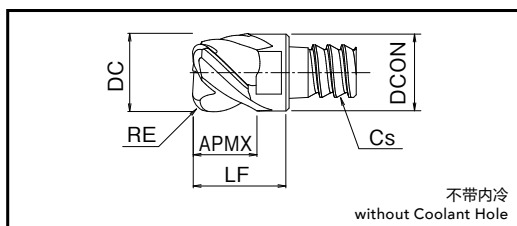

不带内冷 without Coolant Hole

PXDR-P 3刃 多功能型 圆弧角型 Three Flutes, Multi-purpose, Corner Radius Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	圆弧半径 RE	刃数 ZEFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830349	PXDR100C10-03R015-P	10	1.5	3	7	13	9.7	45°	C10	XP3225
<b>NEW</b> 7830350	PXDR100C10-03R020-P		2							
7830351	PXDR120C12-03R015-P	12	1.5	3	8.4	14.4	11.7	45°	C12	XP3225
7830352	PXDR120C12-03R020-P		2							
7830353	PXDR160C16-03R020-P	16	2	3	11.2	18.7	15.7	45°	C16	XP3225
7830354	PXDR160C16-03R030-P		3							
7830355	PXDR200C20-03R020-P	20	2	3	14	21.5	19.6	45°	C20	XP3225
7830356	PXDR200C20-03R030-P		3							

PXDR-N 3刃 耐久型 圆弧角型 Three Flutes, Heavy-duty, Corner Radius Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	圆弧半径 RE	刃数 ZEFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830369	PXDR100C10-03R015-N	10	1.5	3	7	13	9.7	45°	C10	XP6305
<b>NEW</b> 7830370	PXDR100C10-03R020-N		2							
7830371	PXDR120C12-03R015-N	12	1.5	3	8.4	14.4	11.7	45°	C12	XP6305
7830372	PXDR120C12-03R020-N		2							
7830373	PXDR160C16-03R020-N	16	2	3	11.2	18.7	15.7	45°	C16	XP6305
7830374	PXDR160C16-03R030-N		3							
7830375	PXDR200C20-03R020-N	20	2	3	14	21.5	19.6	45°	C20	XP6305
7830376	PXDR200C20-03R030-N		3							


库存种类都为○(即标准库存品)。 Stock are categorized as ○ (Standard stock item).

# Phoenix PXM


球头型

Ball Type

## PXBE



## Specification

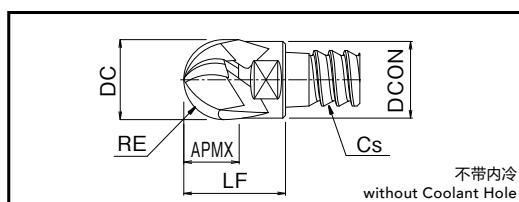不带内冷  
without Coolant Hole

不带内冷 without Coolant Hole

PXBE-P 3刃 多功能型 球头型 Three Flutes, Multi-purpose, Ball Type



单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	球半径 RE	刃数 ZEFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830270	PXBE100C10-03R050-P	10	5	3	7	13	9.7	45°	C10	XP3320
7830271	PXBE120C12-03R060-P	12	6	3	8.4	14.4	11.7	45°	C12	XP3320
7830272	PXBE160C16-03R080-P	16	8	3	11.2	18.7	15.7	45°	C16	XP3320
7830273	PXBE200C20-03R100-P	20	10	3	14	21.5	19.6	45°	C20	XP3320

PXBE-N 3刃 耐久型 球头形 Three Flutes, Heavy-duty, Ball Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	球半径 RE	刃数 ZEFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830250	PXBE100C10-03R050-N	10	5	3	7	13	9.7	45°	C10	XP3320
7830251	PXBE120C12-03R060-N	12	6	3	8.4	14.4	11.7	45°	C12	XP3320
7830252	PXBE160C16-03R080-N	16	8	3	11.2	18.7	15.7	45°	C16	XP3320
7830253	PXBE200C20-03R100-N	20	10	3	14	21.5	19.6	45°	C20	XP3320

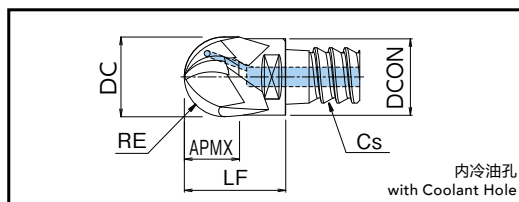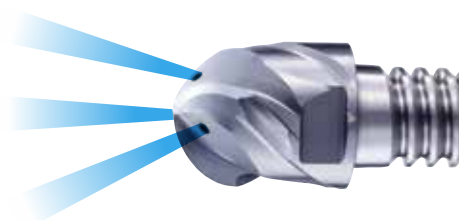内冷油孔  
with Coolant Hole

内冷油孔 with Coolant Hole

PXBE-P 3刃 耐久型 球头形 Three Flutes, Multi-purpose, Ball Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	球半径 RE	刃数 ZEFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830281	PXBE120C12-03R060-P-O	12	6	3	8.4	14.4	11.7	45°	C12	XP3320
<b>NEW</b> 7830282	PXBE160C16-03R080-P-O	16	8	3	11.2	18.7	15.7	45°	C16	XP3320
<b>NEW</b> 7830283	PXBE200C20-03R100-P-O	20	10	3	14	21.5	19.6	45°	C20	XP3320

1. 使用内部给油时, 请使用带内冷油孔的刀头和刀杆。有关刀杆的详细信息, 请参阅 p.208 · p210。

1. For the use of internal coolant, please use the appropriate head and shank holders with oil hole. Refer to pages 208 and 210 for details on shank holders.

PXBE-N 3刃 耐久型 球头形 Three Flutes, Heavy-duty, Ball Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	球半径 RE	刃数 ZEFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830261	PXBE120C12-03R060-N-O	12	6	3	8.4	14.4	11.7	45°	C12	XP3320
<b>NEW</b> 7830262	PXBE160C16-03R080-N-O	16	8	3	11.2	18.7	15.7	45°	C16	XP3320
<b>NEW</b> 7830263	PXBE200C20-03R100-N-O	20	10	3	14	21.5	19.6	45°	C20	XP3320

1. 使用内部给油时, 请使用带内冷油孔的刀头和刀杆。有关刀杆的详细信息, 请参阅 p.208 · p210。


1. For the use of internal coolant, please use the appropriate head and shank holders with oil hole. Refer to pages 208 and 210 for details on shank holders.

# Phoenix PXM


球头型

Ball Type

## PXBM



## Specification

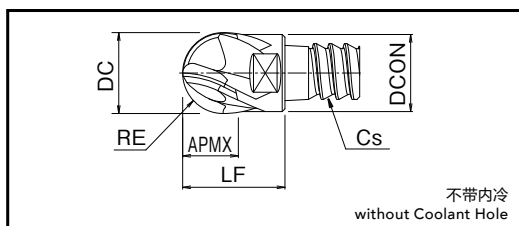

不带内冷 without Coolant Hole

PXBM 多刃 球头型 Multiple Flutes, Ball Type

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	外径 DC	球半径 RE	刃数 ZFP	刃长 APMX	全长 LF	颈径 DCON	螺旋角 FHA	安装规格 Cs	材质 Grades
<b>NEW</b> 7830300	PXBM100C10-04R050	10	5	4	7	13	9.7	45°	C10	XP3320
7830301	PXBM120C12-04R060	12	6	4	8.4	14.4	11.7	45°	C12	XP3320
7830302	PXBM160C16-06R080	16	8	6	11.2	18.7	15.7	45°	C16	XP3320
7830303	PXBM200C20-06R100	20	10	6	14	21.5	19.6	45°	C20	XP3320



# Phoenix PXM

PXM用 直柄刀杆

Straight Shank Holder for PXM

## PXMZ

## Specification

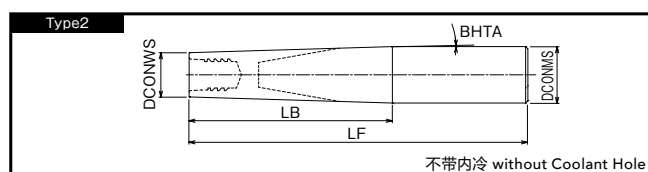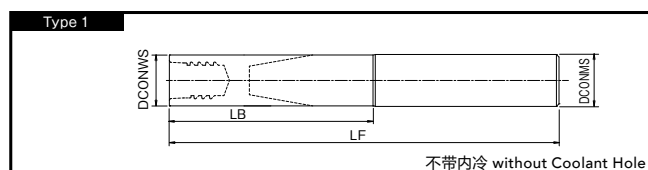

不带内冷 without Coolant Hole



硬质合金刀杆 Carbide Shank

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	颈径 DCONWS	柄径 DCONMS	角度 BHTA	全长 LF	颈长 LB	刀头安装时的有效长度 Head + LB			安装规格 Cs	形状 Type
							PXVC以外 Except PXVC	PXVC 外径 DC			
								φ10, 12, 16, 20, 25, 32	φ12, 14, 18, 22 (粗刀型) Reduced Shank Type		
<b>NEW</b> 7801830	PXMZ-C10SS10-S075CS	9.8	10	0°	75	17.3	30.3	33.3	35.3	C10	1
<b>NEW</b> 7801810	PXMZ-C10SS10-L100CS		10	0°	100	37.3	50.3	53.3	55.3		1
<b>NEW</b> 7801840	PXMZ-C10TP12-LL130CS		12	0.9°	130	67	80	83	85		2
7801831	PXMZ-C12SS12-S075CS	11.7	12	0°	75	24	38.4	42	44	C12	1
7801811	PXMZ-C12SS12-L100CS		12	0°	100	45.9	60.3	63.9	65.9		1
7801832	PXMZ-C12SS12-L115CS		12	0°	115	64.2	78.6	82.2	84.2		1
7801841	PXMZ-C12TP16-LL135CS		16	1.3°	135	83.8	98.2	101.8	103.8		2
7801833	PXMZ-C16SS16-S090CS	15.7	16	0°	90	39.2	57.9	62.7	64.7	C16	1
7801812	PXMZ-C16SS16-L130CS		16	0°	130	61.2	79.9	84.7	86.7		1
7801834	PXMZ-C16SS16-L135CS		16	0°	135	84.2	102.9	107.7	109.7		1
7801842	PXMZ-C16TP20-LL165CS		20	1.1°	165	115	136.5	138.5	140.5		2
7801835	PXMZ-C20SS20-S090CS	19.6	20	0°	90	39.1	60.6	66.6	68.6	C20	1
7801813	PXMZ-C20SS20-L150CS		20	0°	150	78.4	99.9	105.9	107.9		1
7801836	PXMZ-C20SS20-L180CS		20	0°	180	109.1	130.6	136.6	138.6		1
7801843	PXMZ-C20TP25-LL200CS		25	1.1°	200	140	161.5	167.5	169.5		2
7801814	PXMZ-C25SS25-L200CS	24	25	0°	200	96.6	124.1	131.6	—	C25	1
<b>NEW</b> 7801815	PXMZ-C32SS32-L250CS	28	32	0°	250	115.2	—	159.9	—	C32	1

1. 请适当调整冷却喷嘴的位置, 以免切屑卷曲缠绕。

1. Adjust the position of the coolant nozzles accordingly so that the chips do not get tangled.

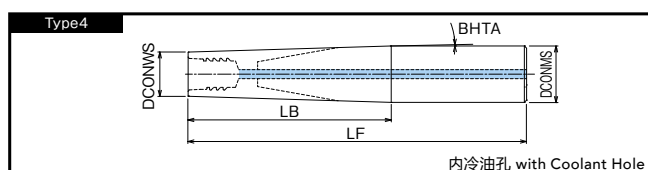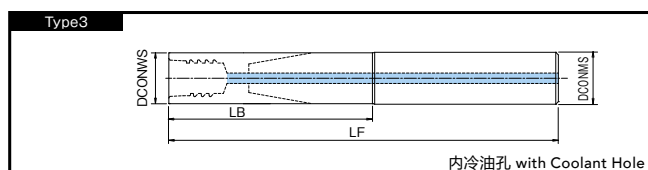

## 内冷油孔 with Coolant Hole

硬质合金刀杆 Carbide Shank

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	颈径 DCONWS	柄径 DCONMS	角度 BHTA	全长 LF	颈长 LB	刀头安装时的有效长度 Head + LB			安装规格 Cs	形状 Type
							PXVC以外 Except PXVC	PXVC 外径 DC			
								φ 12, 16, 20, 25	φ 14, 18, 22		
<b>NEW</b> 7803511	PXMZ-C12SS12-S075CS-O	11.7	12	0°	75	25	39.4	43	45	C12	3
<b>NEW</b> 7803512	PXMZ-C12SS12-L100CS-O		12	0°	100	46.3	60.7	64.3	66.3		3
<b>NEW</b> 7803513	PXMZ-C12SS12-L115CS-O		12	0°	115	65	79.4	83	85		3
<b>NEW</b> 7803514	PXMZ-C12TP16-LL135CS-O		16	1.3°	135	85	99.4	103	105		4
<b>NEW</b> 7803515	PXMZ-C12TP16-LL150CS-O		16	1°	150	85.6	100	103.6	105.6		4
<b>NEW</b> 7803521	PXMZ-C16SS16-S090CS-O	15.7	16	0°	90	40	58.7	63.5	65.5	C16	3
<b>NEW</b> 7803522	PXMZ-C16SS16-L130CS-O		16	0°	130	62	80.7	85.5	87.5		3
<b>NEW</b> 7803523	PXMZ-C16SS16-L135CS-O		16	0°	135	85	103.7	108.5	110.5		3
<b>NEW</b> 7803524	PXMZ-C16TP20-LL165CS-O		20	1°	165	115	133.7	138.5	140.5		4
<b>NEW</b> 7803525	PXMZ-C16TP20-LL180CS-O		20	1°	180	116.6	135.3	140.1	142.1		4
<b>NEW</b> 7803531	PXMZ-C20SS20-S090CS-O	19.6	20	0°	90	40	61.5	67.5	69.5	C20	3
<b>NEW</b> 7803532	PXMZ-C20SS20-L150CS-O		20	0°	150	79.3	100.8	106.8	108.8		3
<b>NEW</b> 7803533	PXMZ-C20SS20-L180CS-O		20	0°	180	110	131.5	137.5	139.5		3
<b>NEW</b> 7803534	PXMZ-C20TP25-LL200CS-O		25	1°	200	140	161.5	167.5	169.5		4
<b>NEW</b> 7803535	PXMZ-C20TP25-LL210CS-O		25	1°	210	145	166.5	172.5	174.5		4
<b>NEW</b> 7803541	PXMZ-C25SS25-L200CS-O	24	25	0°	200	98	125.5	133	—	C25	3

1. 使用内部给油时, 请使用带内冷油孔的刀头和刀杆。但是, PXVC 即使使用无油孔的刀头也可安装带内冷油孔的刀杆进行加工。

2. 请适当调整冷却喷嘴的位置, 以免切屑卷曲缠绕。

1. For the use of internal coolant, please use the appropriate head and shank holders with oil hole.

Shank holders with oil hole can also be used with heads without oil hole such as PXVC in case of dry machining or external coolant.

2. Adjust the position of the coolant nozzles accordingly so that the chips do not get tangled.



# Phoenix PXM

PXM用 直柄刀杆

Straight Shank Holder for PXM

## PXMZ

## Specification

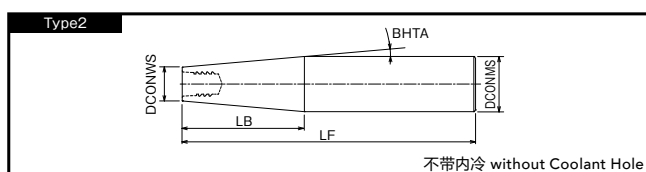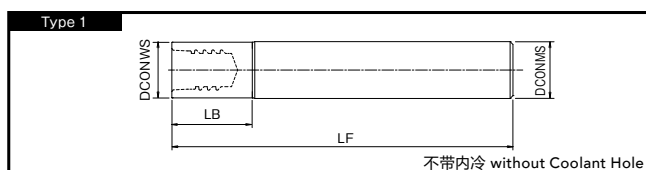

不带内冷 without Coolant Hole


钢制刀杆 Steel Shank

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	颈径 DCONWS	柄径 DCONMS	角度 BHTA	全长 LF	颈长 LB	刀头安装时的有效长度 Head + LB			安装规格 Cs	形状 Type
							PXVC以外 Except PXVC	PXVC 外径 DC			
								φ10, 12, 16, 20, 25, 32	φ12, 14, 18, 22 (粗刀型) Reduced Shank Type		
<b>NEW</b> 7801800	PXMZ-C10SS10-S075	9.8	10	0°	75	12	25	28	30	C10	1
7801801	PXMZ-C12SS12-S100	11.7	12	0°	100	18	32.4	36	38	C12	1
7801821	PXMZ-C12TP20-S145		20	5°	145	47.4	61.8	65.4	67.4		2
7801802	PXMZ-C16SS16-S100	15.7	16	0°	100	23	41.7	46.5	48.5	C16	1
7801822	PXMZ-C16TP25-S155		25	5°	155	53.1	71.8	76.6	78.6		2
7801803	PXMZ-C20SS20-S120	19.6	20	0°	120	28	49.5	55.5	57.5	C20	1
7801823	PXMZ-C20TP32-S170		32	5°	170	70.8	92.3	98.3	100.3		2
7801804	PXMZ-C25SS25-S140	24	25	0°	140	34.5	62	69.5	—	C25	1
<b>NEW</b> 7801805	PXMZ-C32SS32-S160	28	32	0°	160	33	—	77.7	—	C32	1

1. 请适当调整冷却喷嘴的位置, 以免切屑卷曲缠绕。

1. Adjust the position of the coolant nozzles accordingly so that the chips do not get tangled.

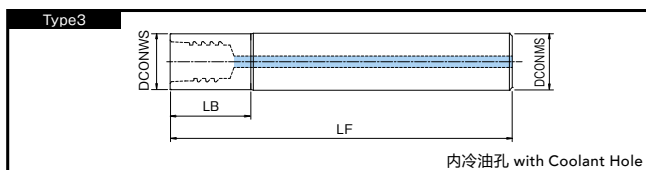

## 内冷油孔 with Coolant Hole

钢制刀杆 Steel Shank

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	颈径 DCONWS	柄径 DCONMS	角度 BHTA	全长 LF	颈长 LB	刀头安装时的有效长度 Head + LB			安装规格 Cs	形状 Type
							PXVC以外 Except PXVC	PXVC 外径 DC			
								φ 12, 16, 20, 25	φ 14, 18, 22		
<b>NEW</b> 7803501	PXMZ-C12SS12-S100-O	11.7	12	0°	100	18	32.4	36	38	C12	3
<b>NEW</b> 7803502	PXMZ-C16SS16-S100-O	15.7	16	0°	100	23	41.7	46.5	48.5	C16	3
<b>NEW</b> 7803503	PXMZ-C20SS20-S120-O	19.6	20	0°	120	28	49.5	55.5	57.5	C20	3
<b>NEW</b> 7803504	PXMZ-C25SS25-S140-O	24	25	0°	140	34.5	62	69.5	—	C25	3

1. 使用内部给油时, 请使用带内冷油孔的刀头和刀杆。但是, PXVC 即使使用无油孔的刀头也可安装带内冷油孔的刀杆进行加工。

2. 请适当调整冷却喷嘴的位置, 以免切屑卷曲缠绕。

1. For the use of internal coolant, please use the appropriate head and shank holders with oil hole.

Shank holders with oil hole can also be used with heads without oil hole such as PXVC in case of dry machining or external coolant.

2. Adjust the position of the coolant nozzles accordingly so that the chips do not get tangled.



# Phoenix PXM

PXM用转接头

Joint for PXM

## PXMJ

## Specification

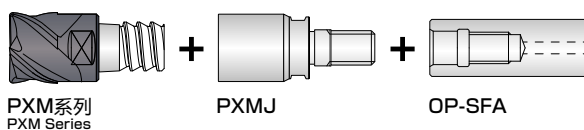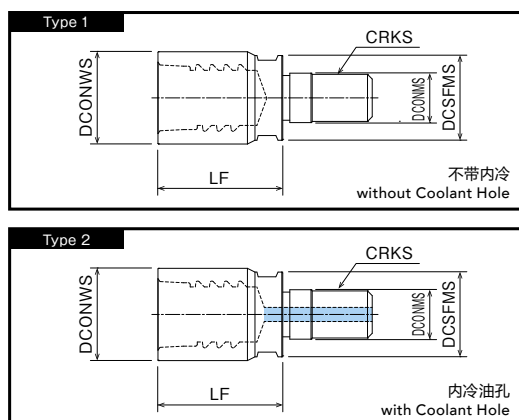

现有的柄部(OP-SFA)与PXMJ组合,则可使用PXM系列。  
PXM series can be used with the shank holder (OP-SFA) by connecting the joint holder (PXMJ).

### 不带内冷 without Coolant Hole

#### PXMJ 转接头 Joint

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	适用刀头外径 Applicable Head Dia.	内螺纹侧端 面直径 DCONWS	外螺纹侧装 夹直径 DCONMS	外螺纹尺寸 CRKS	适用扳手 Spanner	全长 LF	外螺纹侧 端面直径 DCSFMS	安装规格 Cs	形状 Type
7801893	PXMJ-C12SF06	12	11.7	6.5	M 6	PXMP8-10	18	11	C12	1
7801894	PXMJ-C16SF08	16	15.7	8.5	M 8	PXMP13-16	21.8	14.5	C16	1
7801895	PXMJ-C20SF10	20	19.6	10.5	M10	PXMP13-16	26.5	18	C20	1
7801896	PXMJ-C25SF12	25	24	12.5	M12	PXMP21	34	23	C25	1

### 内冷油孔 with Coolant Hole

#### PXMJ 转接头 Joint

单位:mm Unit:mm

商品号 EDP No.	名称 Designation	适用刀头外径 Applicable Head Dia.	内螺纹侧端 面直径 DCONWS	外螺纹侧装 夹直径 DCONMS	外螺纹尺寸 CRKS	适用扳手 Spanner	全长 LF	外螺纹侧 端面直径 DCSFMS	安装规格 Cs	形状 Type
<b>NEW</b> 7803551	PXMJ-C12SF06-O	12	11.7	6.5	M 6	PXMP8-10	18	11	C12	2
<b>NEW</b> 7803552	PXMJ-C16SF08-O	16	15.7	8.5	M 8	PXMP13-16	21.8	14.5	C16	2
<b>NEW</b> 7803553	PXMJ-C20SF10-O	20	19.6	10.5	M10	PXMP13-16	26.5	18	C20	2
<b>NEW</b> 7803554	PXMJ-C25SF12-O	25	24	12.5	M12	PXMP21	34	23	C25	2

1. 使用内部给油时, 请使用带内冷油孔的刀头和刀杆。有关刀杆的详细信息, 请参阅 p.208 · p210.
1. For the use of internal coolant, please use the appropriate head and shank holders with oil hole. Refer to pages 208 and 210 for details on shank holders.

## Accessories

### 零件 Accessories

	商品号 EDP No.	名称 Designation	适用刀头外径 Applicable Head Dia.	安装规格 Cs	推荐安装扭矩 Recommended Tightening Torque
 扳手 Spanner	7801890	PXMP8-10	φ10, φ12 (刃太タイプ)	C10	10N·m
	7801891	PXMP13-16	φ12, φ14	C12	12N·m
			φ16, φ18	C16	30N·m
	7801892	PXMP21	φ20, φ22	C20	50N·m
	<b>NEW</b> 7801897	PXMP24	φ25	C25	60N·m
			φ32	C32	60N·m

PXM 专用扳手, 扳手请另购。

These spanner are specifically for PXM, and sold separately from the cutters.

1. 使用注意事项请参阅 P.228
2. 安装扭矩请参考上表。
3. 专用扭矩扳手请咨询本公司营业人员。
1. Please refer to p.228 for cautions during use.
2. Please refer to the table above for tightening torque.
3. Contact your nearest OSG sales representative for details of our dedicated adjustable torque wrench for tightening inserts.

# Phoenix PXM

平头·圆弧角型

Square · Corner Radius Type

## PXSE

## Cutting Conditions

■ 切削条件基准表 Cutting Conditions

PXSE 侧铣 Side Milling  $L/D \leq 3.5$

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel · Carbon Steel · Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45 ~ 55HRC)		超耐热合金(湿式) Inconel 718 Superalloy (Wet) Inconel 718	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	3,810	920	3,190	770	2,070	500	2,070	420	800	130
12	3,190	770	2,660	640	1,730	420	1,730	350	670	110
16	2,390	580	1,990	480	1,300	320	1,300	260	500	80
20	1,910	460	1,600	390	1,040	250	1,040	210	400	70
25	1,530	370	1,280	310	830	200	830	170	320	60
切深量 Depth of Cut	$a_p=0.5DC$ $a_e=0.15DC$				$a_p=0.5DC$ $a_e=0.1DC$		$a_p=0.5DC$ $a_e=0.05DC$		$a_p=0.5DC$ $a_e=0.05DC$	

PXSE 槽铣 Slot Milling  $L/D \leq 3.5$

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel · Carbon Steel · Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45 ~ 55HRC)		超耐热合金(湿式) Inconel 718 Superalloy (Wet) Inconel 718	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	3,030	610	3,030	610	1,600	320	1,600	260	800	130
12	2,520	510	2,520	510	1,330	270	1,330	220	670	110
16	1,890	380	1,890	380	1,000	200	1,000	160	500	80
20	1,520	310	1,520	310	800	160	800	130	400	70
25	1,210	250	1,210	250	640	130	640	110	320	60
切深量 Depth of Cut	$a_p \leq 0.35DC$				$a_p \leq 0.3DC$		$a_p \leq 0.2DC$		$a_p \leq 0.1DC$	

1. 请使用刚性好、精度高的设备和夹具。
  2. 请根据切深量、机械钢性等使用状况调整转速及进给速度。
  3. 当悬长过长时，易发生振动，请适当调整转速、进给速度和切削深度。
  4. 请考虑被夹具夹持的柄部(PXMZ)的悬长与刀头全长(LF)相加的悬长来选定切削条件。
1. Use a rigid and precise machine and holder.
  2. Please adjust the speed and feed when the depth of cut is large or when machines with low rigidity are used.
  3. Please adjust the cutting condition when the overhang length is longer.
  4. Please consider the overhang length as the total length of replaceable head and overhang length of shank holder.

# Phoenix PXM

平头·圆弧角型

Square · Corner Radius Type

## PXVC

## Cutting Conditions

### ■ 切削条件基准表 Cutting Conditions

#### 可换头式铣刀 PXVC 侧铣 Side Milling $L/D \leq 5$

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel · Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45 ~ 55HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	4,780	1,150	3,820	920	3,190	770	2,550	620
12	3,980	960	3,190	770	2,660	640	2,130	520
14	3,420	830	2,730	660	2,280	550	1,820	440
16	2,990	720	2,390	580	1,990	480	1,600	390
18	2,660	640	2,130	520	1,770	430	1,420	350
20	2,390	580	1,910	460	1,600	390	1,280	310
22	2,180	530	1,740	420	1,450	350	1,160	280
25	1,910	460	1,530	370	1,280	310	1,020	250
32-5F	1,500	380	1,200	240	1,000	250	800	160
32-8F	1,500	480	1,200	390	1,000	320	800	260
切深量 Depth of Cut	ap=0.5DC ae=0.2DC				ap=0.5DC ae=0.1DC		ap=0.5DC ae=0.05DC	

#### 可换头式铣刀 PXVC 侧铣 Side Milling $5 < L/D \leq 6$

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel · Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45 ~ 55HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	4,300	1,040	3,510	850	2,870	690	2,230	540
12	3,590	870	2,920	710	2,390	580	1,860	450
14	3,070	740	2,510	610	2,050	500	1,600	390
16	2,690	650	2,190	530	1,800	440	1,400	340
18	2,390	580	1,950	470	1,600	390	1,240	300
20	2,150	520	1,760	430	1,440	350	1,120	270
22	1,960	480	1,600	390	1,310	320	1,020	250
25	1,720	420	1,410	340	1,150	280	900	220
32	与标准刀柄组合, 最长 L/D=5 Maximum length of L/D=5 in combination with the standard shank							
切深量 Depth of Cut	ap=0.5DC ae=0.2DC				ap=0.5DC ae=0.1DC		ap=0.5DC ae=0.05DC	

1. 请使用刚性良好、精度高的设备和夹具。
  2. 请根据切深量、机械刚性等使用状况调整转速及进给速度。
  3. 当悬长过长时, 易发生振动, 请适当调整转速、进给速度和切削深度。
  4. 请考虑被夹具夹持的柄部(PXMZ)的悬长与刀头全长(LF)相加的悬长来选定切削条件。
1. Use a rigid and precise machine and holder.
  2. Please adjust the speed and feed when the depth of cut is large or when machines with low rigidity are used.
  3. Please adjust the cutting condition when the overhang length is longer.
  4. Please consider the overhang length as the total length of replaceable head and overhang length of shank holder.

可换头式铣刀 PXVC 侧铣 Side Milling  $6 < L/D \leq 7$ 

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel·Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45~55HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	3,820	920	3,190	770	2,550	620	1,910	460
12	3,190	770	2,660	640	2,130	520	1,600	390
14	2,730	660	2,280	550	1,820	440	1,370	330
16	2,390	580	1,990	480	1,600	390	1,200	290
18	2,130	520	1,770	430	1,420	350	1,070	260
20	1,910	460	1,600	390	1,280	310	960	240
22	1,740	420	1,450	350	1,160	280	870	210
25	1,530	370	1,280	310	1,020	250	770	190
32	与标准刀柄组合, 最长L/D=5 Maximum length of L/D=5 in combination with the standard shank							
切深量 Depth of Cut	ap=0.5DC ae=0.2DC				ap=0.5DC ae=0.1DC		ap=0.5DC ae=0.05DC	

1. 请使用刚性良好、精度高的设备和夹具。
  2. 请根据切深量、机械钢性等使用状况调整转速及进给速度。
  3. 当悬长过长时, 易发生振动, 请适当调整转速、进给速度和切削深度。
  4. 请考虑被夹具夹持的柄部(PXMZ)的悬长与刀头全长(LF)相加的悬长来选定切削条件。
1. Use a rigid and precise machine and holder.
  2. Please adjust the speed and feed when the depth of cut is large or when machines with low rigidity are used.
  3. Please adjust the cutting condition when the overhang length is longer.
  4. Please consider the overhang length as the total length of replaceable head and overhang length of shank holder.

# Phoenix PXM

平头·圆弧角型

Square · Corner Radius Type

## PXVC

## Cutting Conditions

■ 切削条件基准表 Cutting Conditions

可换头式铣刀 PXVC 槽铣 Slot Milling  $L/D \leq 5$

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel · Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45 ~ 55HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	4,780	960	3,820	770	3,180	640	2,390	480
12	3,980	800	3,180	640	2,650	530	1,990	400
14	3,410	680	2,730	550	2,270	450	1,710	340
16	2,980	600	2,390	480	1,990	400	1,490	300
18	2,650	530	2,120	420	1,770	350	1,330	270
20	2,390	480	1,910	380	1,590	320	1,190	240
22	2,170	430	1,740	350	1,450	290	1,090	220
25	1,910	380	1,530	310	1,270	250	950	190
32	不推荐(因为刃数比较多) Not recommended (due to the large number of flutes)							
切深量 Depth of Cut	$a_p \leq 0.5DC$		$a_p \leq 0.4DC$		$a_p \leq 0.3DC$			

可换头式铣刀 PXVC 槽铣 Slot Milling  $5 < L/D \leq 6$

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel · Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45 ~ 55HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	3,820	770	3,190	640	2,550	510	2,070	420
12	3,190	640	2,660	540	2,130	430	1,730	350
14	2,730	550	2,280	460	1,820	370	1,480	300
16	2,390	480	1,990	400	1,600	320	1,300	260
18	2,130	430	1,770	360	1,420	290	1,150	230
20	1,910	390	1,600	320	1,280	260	1,040	210
22	1,740	350	1,450	290	1,160	240	950	190
25	1,530	310	1,280	260	1,020	210	830	170
32	与标准刀柄组合, 最长L/D=5 Maximum length of L/D=5 in combination with the standard shank							
切深量 Depth of Cut	$a_p \leq 0.5DC$		$a_p \leq 0.4DC$		$a_p \leq 0.3DC$			

1. 请使用刚性良好、精度高的设备和夹具。
  2. 请根据切深量、机械刚性等使用状况调整转速及进给速度。
  3. 当悬长过长时, 易发生振动, 请适当调整转速、进给速度和切削深度。
  4. 请考虑被夹具夹持的柄部(PXMZ)的悬长与刀头全长(LF)相加的悬长来选定切削条件。
1. Use a rigid and precise machine and holder.
  2. Please adjust the speed and feed when the depth of cut is large or when machines with low rigidity are used.
  3. Please adjust the cutting condition when the overhang length is longer.
  4. Please consider the overhang length as the total length of replaceable head and overhang length of shank holder.

可换头式铣刀 PXVC 槽铣 Slot Milling  $6 < L/D \leq 7$ 

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel·Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45~55HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	3,190	640	2,550	510	2,230	450	1,910	390
12	2,660	540	2,130	430	1,860	380	1,600	320
14	2,280	460	1,820	370	1,600	320	1,370	280
16	1,990	400	1,600	320	1,400	280	1,200	240
18	1,770	360	1,420	290	1,240	250	1,070	220
20	1,600	320	1,280	260	1,120	230	960	200
22	1,450	290	1,160	240	1,020	210	870	180
25	1,280	260	1,020	210	900	180	770	160
32	与标准刀柄组合, 最长L/D=5 Maximum length of L/D=5 in combination with the standard shank							
切深量 Depth of Cut	$a_p \leq 0.3DC$				$a_p \leq 0.25DC$		$a_p \leq 0.2DC$	

1. 请使用刚性良好、精度高的设备和夹具。
  2. 请根据切深量、机械钢性等使用状况调整转速及进给速度。
  3. 当悬长过长时, 易发生振动, 请适当调整转速、进给速度和切削深度。
  4. 请考虑被夹具夹持的柄部(PXMZ)的悬长与刀头全长(LF)相加的悬长来选定切削条件。
1. Use a rigid and precise machine and holder.
  2. Please adjust the speed and feed when the depth of cut is large or when machines with low rigidity are used.
  3. Please adjust the cutting condition when the overhang length is longer.
  4. Please consider the overhang length as the total length of replaceable head and overhang length of shank holder.

# Phoenix PXM

平头·圆弧角型

Square · Corner Radius Type

## PXSM

## Cutting Conditions

### ■切削条件基准表 Cutting Conditions

#### PXSM 侧铣 Side Milling L/D ≤ 3.5

加工材料 Work Material		一般构造用钢·碳素钢·铸铁 Mild Steel·Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel· Titanium Alloy (Wet) Ti-6Al-4V (45 ~ 55HRC)		超耐热合金(湿式) Inconel 718 Superalloy (Wet) Inconel 718	
外径 Mill Dia. (mm)	刃数 Flute	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)
10	6	5,730	2,070	4,780	1,440	3,820	1,150	3,190	960	1,910	420
12	6	4,780	1,730	3,980	1,200	3,190	960	2,660	800	1,600	350
16	6	3,590	1,300	2,990	900	2,390	720	1,990	600	1,200	260
16	8	3,590	1,730	2,990	1,200	2,390	960	1,990	800	1,200	350
20	10	2,870	1,730	2,390	1,200	1,910	960	1,600	800	960	350
25	10	2,300	1,380	1,910	960	1,530	770	1,280	640	770	280
切深量 Depth of Cut		ap ≤ 0.5DC ae ≤ 0.05DC				ap ≤ 0.5DC ae ≤ 0.02DC		ap ≤ 0.3DC ae ≤ 0.02DC			

1. 请使用刚性良好、精度高的设备和夹具。
  2. 请根据切深量、机械刚性等使用状况调整转速及进给速度。
  3. 当悬长过长时，易发生振动，请适当调整转速、进给速度和切削深度。
  4. 请考虑被夹具夹持的柄部(PXMZ)的悬长与刀头全长(LF)相加的悬长来选定切削条件。
1. Use a rigid and precise machine and holder.
  2. Please adjust the speed and feed when the depth of cut is large or when machines with low rigidity are used.
  3. Please adjust the cutting condition when the overhang length is longer.
  4. Please consider the overhang length as the total length of replaceable head and overhang length of shank holder.

# Phoenix PXM

粗加工型  
Roughing Type

## PXNH/PXNL

## Cutting Conditions

■ 切削条件基准表 Cutting Conditions

PXNH・PXNL 侧铣 Side Milling  $L/D \leq 3.5$

加工材料 Work Material	铸铁 Cast Iron FC250		碳素钢 Carbon Steel		合金钢 Alloy Steel		调质钢·预硬钢(快削) Hardened Steel Pre-hardened Steel (Free-Cutting) (~45HRC)		不锈钢 Stainless Steel SUS304	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	2,860	720	3,820	840	3,180	520	2,860	350	2,550	280
12	2,390	600	3,180	700	2,650	440	2,390	290	2,120	230
16	1,790	620	2,390	720	1,990	450	1,790	300	1,590	240
20	1,430	660	1,910	760	1,590	480	1,430	310	1,270	250
25	890	450	1,270	560	1,020	340	890	220	760	170
切深量 Depth of Cut	ap=0.5DC ae=0.3DC					ap=0.5DC ae=0.2DC				

PXNH・PXNL 槽铣 Slot Milling  $L/D \leq 3.5$

加工材料 Work Material	铸铁 Cast Iron FC250		碳素钢 Carbon Steel		合金钢 Alloy Steel		调质钢·预硬钢(快削) Hardened Steel Pre-hardened Steel (Free-Cutting) (~45HRC)		不锈钢 Stainless Steel SUS304	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	2,230	360	3,180	450	2,550	270	2,230	170	1,910	130
12	1,860	300	2,650	370	2,120	220	1,860	140	1,590	110
16	1,390	320	1,990	400	1,590	240	1,390	150	1,190	120
20	1,110	360	1,590	450	1,270	270	1,110	170	950	130
25	760	280	1,150	370	890	210	760	130	640	100
切深量 Depth of Cut	ap=0.5DC									

1. 请使用刚性高、精度高的设备和夹具。
  2. 请根据切深量、机械钢性等使用状况调整转速及进给速度。
  3. 当悬长过长时，易发生振动，请适当调整转速、进给速度和切削深度。
  4. 请考虑被夹具夹持的柄部(PXMZ)的悬长与刀头全长(LF)相加的悬长来选定切削条件。
1. Use a rigid and precise machine and holder.
  2. Please adjust the speed and feed when the depth of cut is large or when machines with low rigidity are used.
  3. Please adjust the cutting condition when the overhang length is longer.
  4. Please consider the overhang length as the total length of replaceable head and overhang length of shank holder.

# Phoenix PXM

圆弧角型

Corner Radius Type

## PXRE

## Cutting Conditions

### ■切削条件基准表 Cutting Conditions

PXRE L/D ≤ 3.5

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel·Carbon Steel·Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel·Tool Steel SCM, SKT, SKS, SKD (~30HRC)		调质钢(38~45HRC) 预硬钢 Hardened Steel·Pre-hardened Steel SKD, NAK80, HPM50		调质钢 Hardened Steel (45~55HRC)		调质钢 Hardened Steel (55~60HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	6,370	12,800	4,800	7,800	3,900	6,000	3,300	4,100	2,800	2,700
12	5,310	10,700	4,000	6,500	3,200	4,900	2,700	3,300	2,300	2,300
16	3,980	12,000	3,000	7,700	2,400	5,900	2,000	3,900	1,700	2,500
20	3,190	9,600	2,400	6,500	1,900	4,900	1,600	3,300	1,400	2,200
切深量 Depth of Cut	$a_p = 0.1 \times \text{圆弧半径(RE)}$ Corner Radius $a_e = 0.3DC$								$a_p = 0.05 \times \text{圆弧半径(RE)}$ Corner Radius $a_e = 0.3DC$	

1. 请使用刚性良好、精度高的设备和夹具。
  2. 请根据切深量、机械刚性等使用状况调整转速及进给速度。
  3. 当悬长过长时，易发生振动，请适当调整转速、进给速度和切削深度。
  4. 请考虑被夹具夹持的柄部(PXMZ)的悬长与刀头全长(LF)相加的悬长来选定切削条件。
1. Use a rigid and precise machine and holder.
  2. Please adjust the speed and feed when the depth of cut is large or when machines with low rigidity are used.
  3. Please adjust the cutting condition when the overhang length is longer.
  4. Please consider the overhang length as the total length of replaceable head and overhang length of shank holder.

# Phoenix PXM

圆弧角型  
Corner Radius Type

## PXDR

## Cutting Conditions

■ 切削条件基准表 Cutting Conditions

PXDR-P  $L/D \leq 5$

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel·Carbon Steel·Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel·Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel·Hardened Steel SUS304, SKD (~45HRC)		调质钢 Hardened Steel (45~55HRC)	
外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)
10	4,770	3,580	4,770	2,860	4,770	2,150	4,770	1,430
12	3,980	2,980	3,980	2,390	3,980	1,790	3,980	1,190
16	2,980	2,240	2,980	1,790	2,980	1,340	2,980	900
20	2,390	1,790	2,390	1,430	2,390	1,070	2,390	720
切深量 Depth of Cut	ap=0.05DC ae=0.25DC						ap=0.03DC ae=0.25DC	

PXDR-N  $L/D \leq 5$

加工材料 Work Material	合金钢·工具钢 Alloy Steel·Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel·Hardened Steel SUS304, SKD (~45HRC)		调质钢 Hardened Steel (45~55HRC)		调质钢 Hardened Steel (55~60HRC)	
外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)
10	4,770	3,580	3,820	2,290	3,180	1,150	3,180	950
12	3,980	2,980	3,180	1,910	2,650	950	2,650	800
16	2,980	2,240	2,390	1,430	1,990	720	1,990	600
20	2,390	1,790	1,910	1,150	1,590	570	1,590	480
切深量 Depth of Cut	ap=0.03DC ae=0.25DC						ap=0.02DC ae=0.2DC	

1. 请使用刚性高、精度高的设备和夹具。
  2. 请根据切深量、机械钢性等使用状况调整转速及进给速度。
  3. 当悬长过长时，易发生振动，请适当调整转速、进给速度和切削深度。
  4. 请考虑被夹具夹持的柄部(PXMZ)的悬长与刀头全长(LF)相加的悬长来选定切削条件。
1. Use a rigid and precise machine and holder.
  2. Please adjust the speed and feed when the depth of cut is large or when machines with low rigidity are used.
  3. Please adjust the cutting condition when the overhang length is longer.
  4. Please consider the overhang length as the total length of replaceable head and overhang length of shank holder.

# Phoenix PXM

球头型

Ball Type

## PXBE

## Cutting Conditions

### ■切削条件基准表 Cutting Conditions

#### PXBE-P $L/D \leq 5$

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel·Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel·Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金 Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45~55HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	4,770	2,150	3,820	1,720	3,180	1,430	3,180	950
12	3,980	1,790	3,180	1,430	2,650	1,190	2,650	800
16	2,980	1,340	2,390	1,070	1,990	900	1,990	600
20	2,390	1,070	1,910	860	1,590	720	1,590	480
切深量 Depth of Cut	$a_p=0.07DC$ $Pf=0.15DC$				$a_p=0.04DC$ $Pf=0.1DC$			

#### PXBE-N $L/D \leq 3.5$

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel·Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel·Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金 Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45~55HRC)		调质钢 Hardened Steel (55~60HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	7,960	3,580	7,960	3,580	6,370	2,290	4,770	1,430	3,180	480
12	6,630	2,980	6,630	2,980	5,310	1,910	3,980	1,190	2,650	400
16	4,970	2,240	4,970	2,240	3,980	1,430	2,980	900	1,990	300
20	3,980	1,790	3,980	1,790	3,180	1,150	2,390	720	1,590	240
切深量 Depth of Cut	$a_p=0.05DC$ $Pf=0.15DC$				$a_p=0.04DC$ $Pf=0.1DC$		$a_p=0.03DC$ $Pf=0.05DC$			

1. 请使用刚性良好、精度高的设备和夹具。
  2. 请根据切深量、机械钢性等使用状况调整转速及进给速度。
  3. 当悬长过长时，易发生振动，请适当调整转速、进给速度和切削深度。
  4. 请考虑被夹具夹持的柄部(PXMZ)的悬长与刀头全长(LF)相加的悬长来选定切削条件。
1. Use a rigid and precise machine and holder.
  2. Please adjust the speed and feed when the depth of cut is large or when machines with low rigidity are used.
  3. Please adjust the cutting condition when the overhang length is longer.
  4. Please consider the overhang length as the total length of replaceable head and overhang length of shank holder.

# Phoenix PXM

球头型

Ball Type

## PXBM

## Cutting Conditions

■ 切削条件基准表 Cutting Conditions

PXBM  $L/D \leq 3.5$

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel·Carbon Steel Cast Iron		合金钢·工具钢 Alloy Steel Tool Steel		不锈钢·调质钢 Stainless Steel Hardened Steel		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet)		调质钢 Hardened Steel	
	SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		SCM, SKT, SKS, SKD (~30HRC)		SUS304, SKD (~45HRC)		Ti-6Al-4V (45~55HRC)		(55~60HRC)	
外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)
10	7,960	4,770	7,960	4,770	6,360	3,050	4,770	1,910	3,180	640
12	6,630	3,980	6,630	3,980	5,300	2,540	3,980	1,590	2,650	530
16	4,970	4,480	4,970	4,480	3,970	2,860	2,980	1,790	1,990	600
20	3,980	3,580	3,980	3,580	3,180	2,290	2,390	1,430	1,590	480
切深量 Depth of Cut	$a_p = 0.02DC$ $P_f = 0.05DC$									



1. 请使用刚性好、精度高的设备和夹具。
  2. 请根据切深量、机械钢性等使用状况调整转速及进给速度。
  3. 当悬长过长时，易发生振动，请适当调整转速、进给速度和切削深度。
  4. 请考虑被夹具夹持的柄部(PXMZ)的悬长与刀头全长(LF)相加的悬长来选定切削条件。
1. Use a rigid and precise machine and holder.
  2. Please adjust the speed and feed when the depth of cut is large or when machines with low rigidity are used.
  3. Please adjust the cutting condition when the overhang length is longer.
  4. Please consider the overhang length as the total length of replaceable head and overhang length of shank holder.

# Cutting Data

加工数据 Cutting Data

[PXSE]寿命1.6倍, 工具成本却1/5 ~零部件加工~ 1.6 times durability and 1/5 of tooling cost achieved in parts machining



使用工具 Tool	刀头: PXSE200C20-04R010 Head 刀杆: PXMZ-C20SS20-S120 Holder	其他公司整体硬质合金铣刀 Competitor's Solid Carbide End Mill
尺寸 Size	φ20×R1 4刃 Flutes	
加工工件 Work	机械零件 Machine Parts	
加工材料 Work Material	S25C	
切削速度 Cutting Speed	60m/min (1,000min <sup>-1</sup> )	
进给速度 Feed	400mm/min (0.1mm/t)	
切削方法 Cutting Method	槽铣 Slotting	
切削深度 Depth of Cut	ap=3mm ae=20mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center	
加工工件数 Number of Processed Workpiece	5个 PCS	3个 PCS

	每一个加工件的工本成本 (对比) Tooling cost per unit				
	1	2	3	4	5
PXSE					
其他公司的硬质合金整体式 Competitor's solid carbide tool					

与整体式工具相比寿命长1.6倍, 每一个加工件的工本成本为1/5。  
The tool achieved 1.6 times durability. Tooling cost per unit was reduced to 1/5.

[PXVC] 加工面粗度及加工精度都比整体式工具好 Achieved better surface roughness and accuracy versus competitor

使用工具 Tool	刀头: PXVC220C20-04R005 Head 刀杆: PXMZ-C20SS20-L150L Holder	以往整体硬质合金铣刀 Conventional Solid End Mill
尺寸 Size	φ22×R0.5	φ20
加工材料 Work Material	SKD61 (40HRC)	
切削速度 Cutting Speed	50m/min (723min <sup>-1</sup> )	50m/min (796min <sup>-1</sup> )
进给速度 Feed	300mm/min (0.104mm/t)	60mm/min (0.019mm/t)
切削方法 Cutting Method	侧面加工 Side Milling	
切削深度 Depth of Cut	ap=17.6mm (0.8D) ae=0.05mm	ap=88mm (4.4D) ae=0.05mm
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	立式加工中心(BT50) Vertical Machining Center	

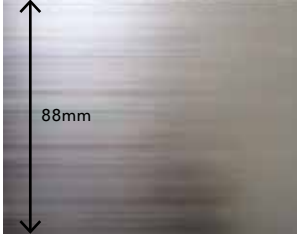PXVC	其他公司整体硬质合金铣刀 Conventional Solid End Mill
	
Ra=0.11μm 加工误差=12μm Tolerance	Ra=0.77μm 加工误差=18μm Tolerance
Rz=0.8μm 偏移=3μm Fall	Rz=5.0μm 偏移=10μm Fall

与以往整体硬质合金铣刀相比, PXVC在相同的加工效率下, 获得了更好的加工精度和加工表面。

PXVC achieved better accuracy and finished surface in same machining efficiency versus the competition.

[PXSM]由于多刃化, 加工效率提高2倍 ~涡轮叶片加工~ The multiple edge design helps double efficiency in the milling of blades

使用工具 Tool	刀头: PXSM160C16-06R005 Head 刀杆: PXMZ-C16SS16-L130CS Holder	以往整体硬质合金铣刀 Competitor's Radius Cutter
尺寸 Size	φ16×R0.5 6刃 Flutes	φ16×R2.5 2刃 Flutes
材质 Grades	XP3225	硬质合金涂层刀片 Coated Carbide Insert
加工材料 Work Material	13Cr 相等物 Equivalent	
切削速度 Cutting Speed	125m/min (2,500min <sup>-1</sup> )	
进给速度 Feed	690mm/min (0.046mm/t)	350mm/min (0.07mm/t)
切削深度 Depth of Cut	ap=1mm ae=0.25mm	
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	立式5轴加工中心 5-Axis Vertical Machining Center	




进行很难提高参数的精加工时, 替代圆弧角铣刀使用PXSM, 效率能提高2倍。

In finishing operations with settings that are difficult to modify, switching to the Phoenix Radius Cutter can double milling efficiency.

### [PXNH]由于不等距导程的效果, 能实现低抵抗的加工 The variable lead enables low-resistance machining

使用工具 Tool	刀头: PXNH200C20-04C006 Head 刀杆: PXMZC20SS20-S120 Holder	其他公司可转位式粗加工型 A, B Competitors' indexable roughing cutter
尺寸 Size	φ20 4刃 Flutes	φ20 6刃 Flutes
加工材料 Work Material	S50C	
切削速度 Cutting Speed	100m/min (1,590min <sup>-1</sup> )	
进给速度 Feed	450mm/min (0.07mm/t)	450mm/min (0.047mm/t)
切削方法 Cutting Method	槽铣 Slotting	
切削深度 Depth of Cut	ap=6mm, 8mm, 10mm	
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	立式加工中心(BT40) Vertical Machining Center	

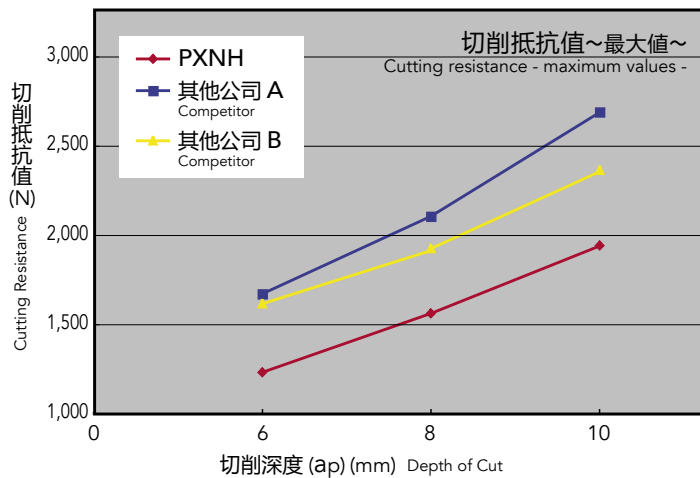


实现比其他公司产品低20% 的抵抗值。

The resistance value can be reduced by more than 20% from the competitors' products.

### [PXNL]由于不等距导程形状, 能实现稳定、长寿命的加工 The variable lead enables stable machining and a long tool life

使用工具 Tool	刀头: PXNL200C20-04C006 Head 刀杆: PXMZC20SS20-S120 Holder	其他公司可转位式粗加工型 A, B Competitors' indexable roughing cutter
尺寸 Size	φ20 4刃 Flutes	φ20 6刃 Flutes
加工材料 Work Material	S50C	
切削速度 Cutting Speed	120m/min (1,910min <sup>-1</sup> )	
进给速度 Feed	764mm/min (0.1mm/t)	764mm/min (0.066mm/t)
切削方法 Cutting Method	侧铣 Side Milling	
切削深度 Depth of Cut	ap=10mm (0.5D) ae=6mm (0.3D)	
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	立式加工中心(BT40) Vertical Machining Center	

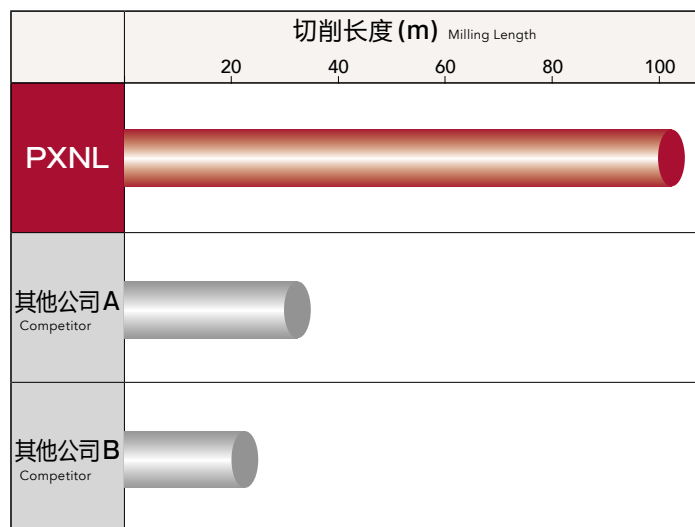

实现比其他公司产品多2倍的使用寿命。

More than twice the durability of the competitors' products.



# Cutting Data

加工数据 Cutting Data


[PXRE]由于多刃化, 加工效率提高1.8倍 ~ 模具半粗加工~ The multiple edge design helps increase efficiency by 1.8 times in die mold roughing processes

使用工具 Tool	刀头: PXRE200C20-06R030 Head 刀杆: PXMZ-C20SS20-S120 Holder	其他公司高进给圆弧角铣刀 硬质合金涂层刀片 Competitor's High Feed Radius Cutter/Coated Carbide Insert
尺寸 Size	φ20×R3 6刃 Flutes	φ20×R3 2刃 Flutes
加工材料 Work Material	SKD61 (43HRC)	
切削速度 Cutting Speed	230m/min (3,700min <sup>-1</sup> )	120m/min (1,900min <sup>-1</sup> )
进给速度 Feed	6,700mm/min (0.3mm/t)	3,100mm/min (0.8mm/t)
切削深度 Depth of Cut	0.4mm	0.5mm
切削宽度 Width of Cut	10mm	
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center	

在使用高进给圆弧角刀具粗加工时, 在编写程序时会输入R值, 这导致加工时产生很大残余量。而PXRE的圆弧角R是高精度, 其残余量很少, 在进行后序加工时, 加工负荷稳定, 工具寿命以及加工精度都提高了。

使用PXRE替代半粗加工用的高进给圆弧角铣刀, 可以提高加工效率1.8倍

By replacing the high feed radius cutter with the PXRE, milling efficiency can be increased by 1.8 times

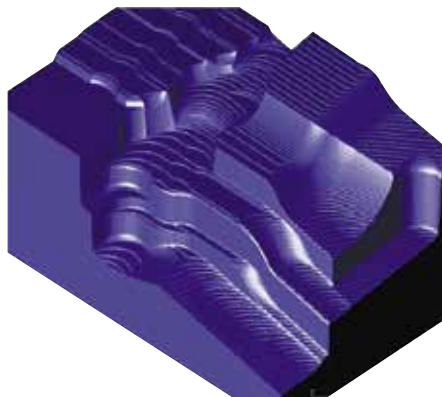


With high feed radius cutters, a simulated R value is inputted in the program during rough milling, resulting in large amounts of uncut areas. In contrast, with the high precision Corner R form PXRE, there are fewer uncut areas, which reduce the load of the next process, thereby increasing tool life and the precision of cut.

[PXDR-P]易发生振动的L/D=7也能稳定加工 Stable machining was achieved in easily chatter L/D=7

使用工具 Tool	刀头: PXDR160C16-03R030-P Head 刀杆: PXMZ-C16SS16-L135CS Holder	其他公司A, B Competitor
尺寸 Size	φ16×R3 3刃 Flutes	φ16×R3 4刃 Flutes
加工材料 Work Material	NAK80 40HRC	
切削速度 Cutting Speed	30m/min (597min <sup>-1</sup> )	
进给速度 Feed	537mm/min (0.30mm/t)	537mm/min (0.22mm/t)
切削方法 Cutting Method	L字加工 L-shaped machining	
切削深度 Depth of Cut	ap=0.4mm (0.025Dc) ae=8mm (0.5Dc)	
刀具悬伸 Overhang Length	112mm (L/D=7)	
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	立式加工中心(BT40) Vertical Machining Center	


PXDR-P相较于其他公司产品振动较小, 转角处加工面良好。

PXDR-P achieved fair finished surface with less chattering at the corner of work versus the competition.

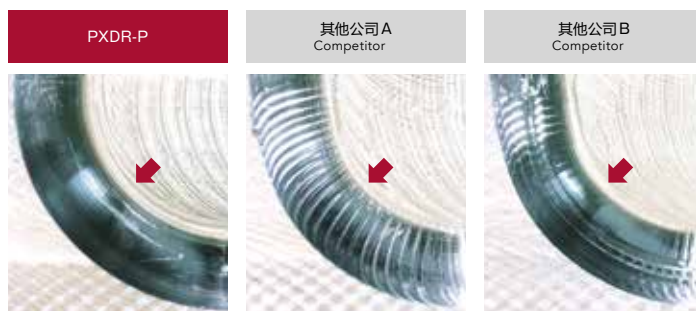

[PXDR-N] 在容易发生振动的L/D=7的环境下也能实现长寿命 Long tool life was achieved machining in L/D=7, which chatters easily

使用工具 Tool	刀头: PXDR160C16-03R030-N Head 刀杆: PXMZ-C16SS16-L135CS Holder	其他公司 A, B Competitor
尺寸 Size	φ16×R3 3刃 Flutes	φ16×R3 4刃 Flutes
加工材料 Work Material	SKD61 (40HRC)	
切削速度 Cutting Speed	120m/min (2,387min <sup>-1</sup> )	
进给速度 Feed	2,149mm/min (0.30mm/t)	2,149mm/min (0.22mm/t)
切削方法 Cutting Method	平面加工 Face Milling	
切削深度 Depth of Cut	ap=0.4mm (0.025Dc) ae=8mm (0.5Dc)	
刀具悬伸 Overhang Length	112mm (L/D=7)	
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	立式加工中心(BT40) Vertical Machining Center	

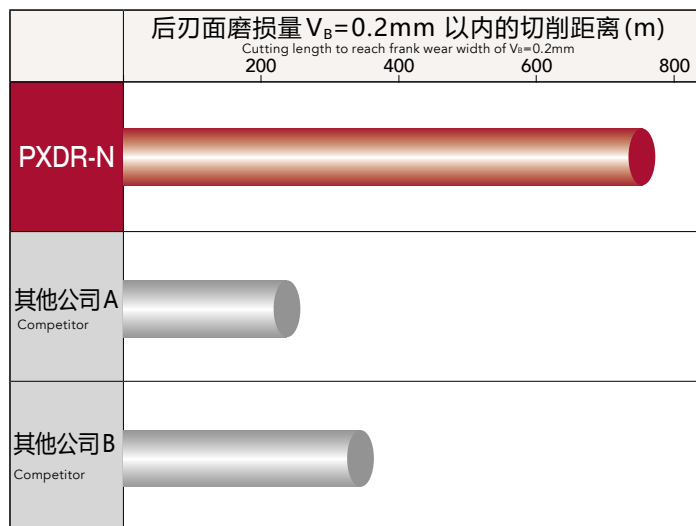


PXDR-N 可以获得其他公司产品2倍以上的耐久度。  
PXDR-N was capable to achieve twice the durability versus the competition.

[PXBE-P] 刀具悬长长的复杂形状加工时, 3刃 PXBE-P 表现非凡 The 3-flutes PXBE-P was more capable versus 4-flutes in machining work with complicated shape

使用工具 Tool	刀头: PXBE160C16-03R080-P Head 刀杆: PXMZ-C16SS16-L130CS Holder	其他公司 A, B Competitor
尺寸 Size	R8 3刃 Flutes	R8 4刃 Flutes
加工材料 Work Material	SKD61 (40HRC)	
切削速度 Cutting Speed	75m/min (1,492min <sup>-1</sup> )	
进给速度 Feed	224mm/min (0.05mm/t)	298mm/min (0.05mm/t)
切削深度 Depth of Cut	ap=0.8mm (0.05Dc) ae=2.4mm (0.15Dc)	
刀具悬伸 Overhang Length	78mm (L/D=4.9)	
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	立式加工中心(BT40) Vertical Machining Center	

加工锐角时, 3刃 PXBE-P 不易发生振动, 刀具磨损较少。  
The 3-flutes PXBE-P was less damaged versus the competitors' 4-flutes tool by machining work required paths with acute angles.

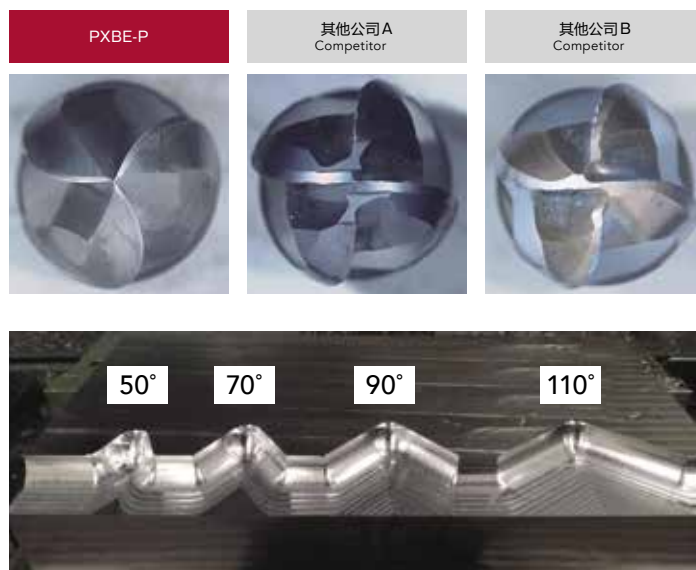


# Cutting Data

加工数据 Cutting Data

[PXBE-N]替换整体式工具, 可减少成本 ~ 模具加工 ~ Tooling cost reduced by switching from solid tools in die casting machining

使用工具 Tool	刀头: PXBE160C16-03R080-N Head 刀杆: PXMZ-C16SS16-L130CS Holder	其他公司整体硬质合金刀具 Competitor's solid carbide tool
尺寸 Size	R8 3刃 Flutes	R8 4刃 Flutes
加工工件 Work	冲压模具 Press Dies	
加工材料 Work Material	SKD11 (60HRC)	
切削速度 Cutting Speed	90m/min (1,800min <sup>-1</sup> )	
进给速度 Feed	810mm/min (0.15mm/t)	810mm/min (0.11mm/t)
切削方法 Cutting Method	啄钻加工 Pick Milling	
切削深度 Depth of Cut	ap=0.32mm ae=0.8mm	
切削油剂 Coolant	水溶性切削油剂 Water-Soluble	
使用机械 Machine	立式加工中心 (BT40) Vertical Machining Center	
切削长度 Milling Length	330m	

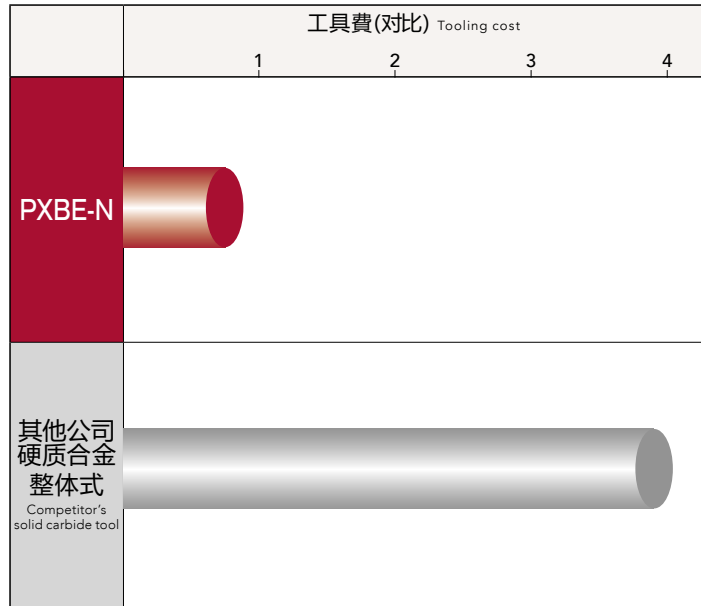


切削长度330m, 可实现与整体刀具同等的加工效率。刀具费用则为1/4。

PXBE-N achieved the same machining efficiency and the cutting length of 330m as the solid end mill.

[PXBE-N]替代可转位式刀具, 效率UP ~ 焊接部加工 ~ Machining efficiency improved by switching from indexable tools in welding parts machining

使用工具 Tool	刀头: PXBE200C20-03R100-N Head 刀杆: PXMZ-C20SS20-L150CS Holder	其他公司可转位式精加工 球头型铣刀 Competitor's indexable finishing ball nose end mill
尺寸 Size	R10 3刃 Flutes	R10 2刃 Flutes
加工工件 Work	压铸模具 Die-casting Die	
加工材料 Work Material	SKD61 (52HRC)+修焊部 Weld overlay	
切削速度 Cutting Speed	75m/min (1,200min <sup>-1</sup> )	
进给速度 Feed	420mm/min (0.12mm/t)	420mm/min (0.17mm/t)
切削方法 Cutting Method	啄钻加工 Pick Milling	
切削深度 Depth of Cut	ap=10mm ae=1mm	
切削油剂 Coolant	无(气冷式) Air Blow	
使用机械 Machine	卧式加工中心 (BT50) Horizontal Machining Center	

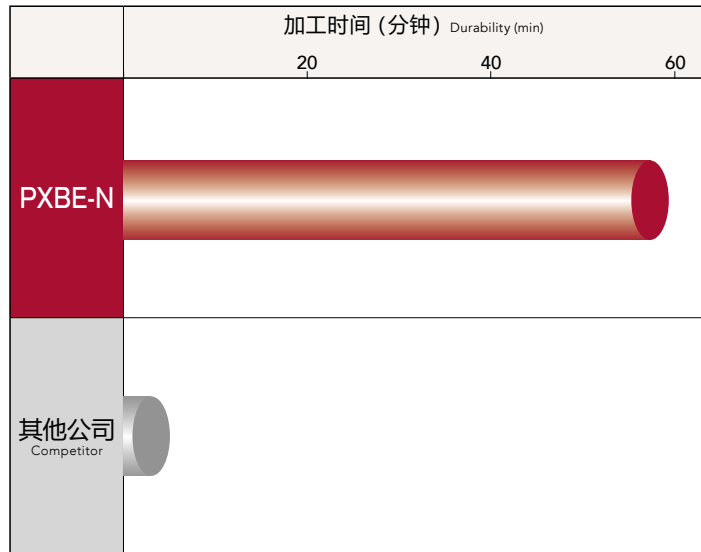


相对于可转位式, 耐用性提高12倍。刀具的更换频率减少, 可以大幅提高加工效率。

Twelve times durability was achieved than the competitor indexable tool. Machining efficiency was highly improved, which was partly due to the shortened tool-change time.

[PXB] NAK80的斜面加工(每刃进给相同时的比较) NAK80 machining at slope surface (comparison in the same feed rate)

使用工具 Tool	刀头: PXBM160C16-06R080 Head 刀杆: PXMZ-C16SS16-S100 Holder
尺寸 Size	R8 6刃 Flutes
加工材料 Work Material	NAK80 (40HRC)
切削速度 Cutting Speed	200m/min (3,980min <sup>-1</sup> )
每刃进给量 Feed Per Tooth	0.12mm/t
切削方法 Cutting Method	啄钻加工 Pick Milling
切削深度 Depth of Cut	ap=0.32mm Pf=0.8mm
切削油剂 Coolant	无(气冷式) Air Blow
使用机械 Machine	卧式加工中心(BT50) Horizontal Machining Center

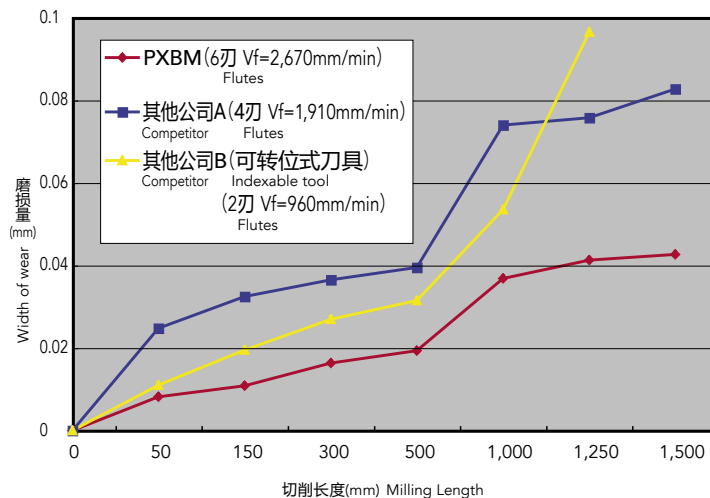

6刃设计可提高效率, 优良的耐磨损性可实现高寿命。

Materialized by more cutting edges for better productivity, longer tool life with superb durability.



### 锁紧顺序 Tightening procedure



#### ① 清洗 Cleaning

将刀头和柄部之间的垃圾以及污垢擦干净

Remove dirt and chips from the connecting thread and shank



#### ② 暂锁 Initial Tightening

手动锁紧  
Tighten by hand



有空隙  
With gap



没有空隙  
Without gap

#### ③ 最终锁紧 Final Tightening

使用专用扳手锁紧  
Tighten with a spanner wrench

#### ④ 确认 Confirmation

确认是否有空隙  
Confirm that there is no gap

### 使用注意

Cautions during use

· 安装刀头时请使用 PXM 专用扳手。(非专用扳手不能使用。)

· 推荐安装扭矩请参考 P.211。

· 刀头与夹具端面安装时, 请确认无间隙。

· 安装部脱油会使得安装更加困难, 有可能达不到端面。所以请勿脱油。

· 请将扳手插入刀头凹槽处, 慢慢回转。

· Only use the spanner wrenches that are designed specifically for the PXM (p.211) for attaching PXM heads.

Please do not use alternative spanner wrenches sold on the market as a replacement.

· Please refer to p.211 for tightening torque.

· Please tighten until the head and the shank holder faces meet. Confirm that there is no gap.

· Degreasing the connecting thread may result in over tightening or a possible separation of the faces. Please do not degrease.

· Please make sure that the spanner wrench is inserted properly and turn it slowly during use.

# Phoenix PXMC

可换头式铣刀 PXM 专用夹具

Collet for PXM Exchangeable Head End Mill

## PXMC



## 特点

Features


### PXMC 夹具特点

PXMC Collet Features

- 小型 M/C 也能取得惊人的排屑性  
Powerful chip evacuation even on small machining center
- 实现短悬长，刚性 UP 与理想的回转平衡性  
The reduction of overhang length improves rigidity and rotational balance
- 丰富的刀头品种  
·适用于钢、不锈钢、铝  
·从粗加工至精加工的广泛加工范围  
A wide variety of exchangeable heads  
·Suitable for steel, stainless steel and aluminum  
·Wide processing range from roughing to finishing
- 与一体式刀柄相比，发生问题时只需更换夹具，具有超高性价比  
Greater cost performance compared to monoblock type holders, only need to change the collet in case of trouble.

《PXMC 超短型》  
PXMC Collet Extra Short Type

《以往的组合》  
Conventional Combination

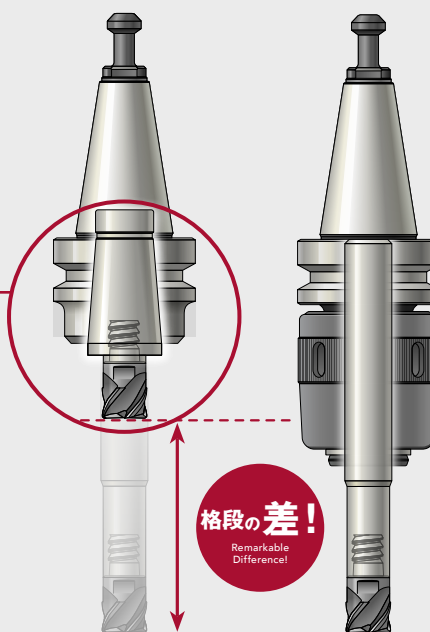

### PXM 刀头特点

PXM Exchangeable Head Features

活用整体铣刀的设计·实绩·专业技术的刃形

·可对应各式各样的加工

All the knowledge and know-how acquired by designing solid carbide end mills are found in these exchangeable heads.  
·Various types are available to meet variety of machining methods.

端面 + 锥形 = 双面固定

- 确保高刚性与精度
- 外周刃的振动精度：0.015mm 以下
- 刀头交换精度(轴向)  $\pm 0.03\text{mm}$

End Face + Taper = Double Face Clamping

- High rigidity and accuracy of tightening
- High precision of run out  $\leq 0.015\text{mm}$
- High head replacing accuracy =  $\pm 0.03\text{mm}$



采用偏梯形螺纹


- 刀头的装卸更方便
- 刀具交换时间的短缩

Applying buttress screw makes easy and reduces time to desorb heads

# Specification



形状尺寸表 Specification

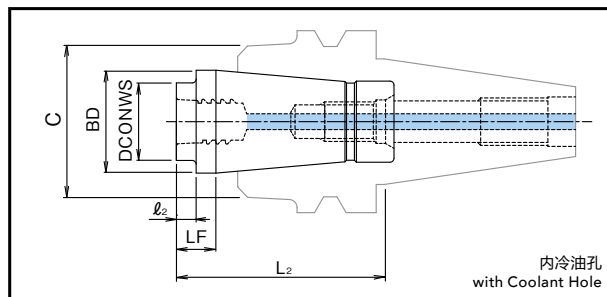

单位:mm Unit:mm

类型 Type	商品号 EDP No.	名称 Designation	颈径 DCONWS	BD	LF	颈长 L <sub>2</sub>	刀头安装时的有效长度 Head + L <sub>2</sub>			安装规格 C <sub>s</sub>
							PXVC以外* <sup>1</sup> Except PXVC	PXVC 外径 DC		
								φ12, 16, 20, 25	φ14, 18, 22 (粗刃型)	
超短型 Extra Short	7834001	PXMC-C1205	11.7	26	10.5	5	19.4	23	25	C12
	7834002	PXMC-C1605	15.7	26	10.5	5	23.7	28.5	30.5	C16
	7834003	PXMC-C2005	19.6	26	10.5	5	26.5	32.5	34.5	C20
	7834004	PXMC-C2505	24.0	26	10.5	5	32.5	40	—	C25
短型 Short	7834011	PXMC-C1230	11.7	26	35.5	30	44.4	48	50	C12
	7834012	PXMC-C1630	15.7	26	35.5	30	48.7	53.5	55.5	C16
	7834013	PXMC-C2030	19.6	26	35.5	30	51.5	57.5	59.5	C20
	7834014	PXMC-C2530	24.0	26	35.5	30	57.5	65	—	C25

- PXMC 是“OSG PHOENIX PXM 系列”刀头专用夹具。
- \*: 可装卸的刀头: PXNH、PXNL、PXSE、PXSE、PXSM、PXDR、PXRE、PXBE、PXBM
- The PXMC exchangeable head is designed specifically for the “OSG PHOENIX PXM” series.
- Applicable exchangeable heads: PXNH, PXNL, PXSE, PXSM, PXDR, PXRE, PXBE, PXBM.

## PXMC 对应 HYPRO 热胀刀柄 产品一览

Product Listing of PXMC corresponding to the HYPRO Shrink System

单位:mm Unit:mm

类型 Type	商品号 EDP No.	名称 Designation	C	L <sub>2</sub>	
				超短型 Extra Short	短型 Short
夹具B型 Holder Type B	8910000	BT30-SLK12-35 P30T-1(MAS1)	38	45.5	70.5
	8910001	BT30-SLK12-35 P30T-2(MAS2)	38	45.5	70.5
	8910002	BT40-SLK12-45	38	55.5	80.5
	8910003	BT40-SLK12-75	38	85.5	110.5
	8910005	A63-SLK12-75	38	85.5	110.5
	8910006	A63-SLK12-135	38	145.5	170.5

- 价格请咨询我司营业。
- PXMC 夹具可与 HYPRO 热胀刀柄互换。
- Contact your local OSG sales representative for information regarding pricing.
- The PXMC collet is compatible with the HYPRO Shrink Collet System.

库存种类都为○(即标准库存品)。 Stock are categorized as ○ (Standard stock item).

# Phoenix PXMC

可换头式铣刀  
Exchangeable Head End Mill

## PXVC+PXMC

# Cutting Conditions

### ■ 切削条件基准表 Cutting Conditions

#### 侧铣 PXVC + PXMC 超短型 Side Milling, PXVC+PXMC Extra Short Type

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel·Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45~55HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	6,690	2,070	5,350	1,650	4,460	1,240	3,320	870
12	5,580	1,720	4,460	1,380	3,720	1,030	2,760	720
14	4,780	1,480	3,820	1,180	3,190	890	2,370	620
16	4,180	1,290	3,350	1,040	2,790	780	2,070	540
18	3,720	1,150	2,980	920	2,480	690	1,840	480
20	3,350	1,040	2,680	830	2,230	620	1,660	440
22	3,040	940	2,440	760	2,030	570	1,510	400
25	2,680	830	2,140	660	1,790	500	1,330	350
32	与标准刀柄组合, 最长L/D=5 Maximum length of L/D=5 in combination with the standard shank							
切削深度 Depth of Cut	ap=0.5DC ae=0.25DC				ap=0.5DC ae=0.12DC		ap=0.5DC ae=0.075DC	

#### 侧铣 PXVC + PXMC 短型 Side Milling, PXVC+PXMC Short Type

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel·Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45~55HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	5,730	1,490	4,590	1,200	3,820	970	2,550	750
12	4,780	1,250	3,820	1,000	3,190	810	2,130	630
14	4,100	1,070	3,280	860	2,730	690	1,820	540
16	3,590	940	2,870	750	2,390	610	1,600	470
18	3,190	830	2,550	670	2,130	540	1,420	420
20	2,870	750	2,300	600	1,910	490	1,280	380
22	2,610	680	2,090	550	1,740	440	1,160	340
25	2,300	600	1,840	480	1,530	390	1,020	300
32	与标准刀柄组合, 最长L/D=5 Maximum length of L/D=5 in combination with the standard shank							
切削深度 Depth of Cut	ap=0.5DC ae=0.2DC				ap=0.5DC ae=0.1DC		ap=0.5DC ae=0.05DC	

1. 请根据切削深度、机械刚性等使用状况调整转速及进给速度。

1. Please adjust speed and feed when the depth of cut is large or machines with low rigidity are used.

槽铣 PXVC + PXMC 超短型 Slot Milling, PXVC+PXMC Extra Short Type

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel·Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45~55HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	5,730	1,450	4,620	1,170	3,820	770	2,620	530
12	4,780	1,210	3,850	980	3,190	640	2,180	440
14	4,100	1,040	3,300	840	2,730	550	1,870	380
16	3,590	910	2,890	730	2,390	480	1,640	330
18	3,190	810	2,570	650	2,130	430	1,460	300
20	2,870	730	2,310	590	1,910	390	1,310	270
22	2,610	660	2,100	530	1,740	350	1,190	240
25	2,300	580	1,850	470	1,530	310	1,050	210
32	与标准刀柄组合, 最长L/D=5 Maximum length of L/D=5 in combination with the standard shank							
切削深度 Depth of Cut	$a_p \leq 0.5DC$		$a_p \leq 0.4DC$		$a_p \leq 0.3DC$			

槽铣 PXVC + PXMC 短型 Slot Milling, PXVC+PXMC Short Type

加工材料 Work Material	一般构造用钢·碳素钢·铸铁 Mild Steel·Carbon Steel Cast Iron SS400, S55C, FC250 (~750N/mm <sup>2</sup> )		合金钢·工具钢 Alloy Steel Tool Steel SCM, SKT, SKS, SKD (~30HRC)		不锈钢·调质钢 Stainless Steel Hardened Steel SUS304, SKD (~45HRC)		调质钢·钛合金(湿式) Hardened Steel Titanium Alloy (Wet) Ti-6Al-4V (45~55HRC)	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	4,780	1,250	3,820	970	3,190	770	2,390	480
12	3,980	1,040	3,190	810	2,660	640	1,990	400
14	3,420	890	2,730	690	2,280	550	1,710	350
16	2,990	780	2,390	610	1,990	480	1,500	300
18	2,660	700	2,130	540	1,770	430	1,330	270
20	2,390	630	1,910	490	1,600	390	1,200	240
22	2,180	570	1,740	440	1,450	350	1,090	220
25	1,910	500	1,530	390	1,280	310	960	200
32	与标准刀柄组合, 最长L/D=5 Maximum length of L/D=5 in combination with the standard shank							
切削深度 Depth of Cut	$a_p \leq 0.5DC$		$a_p \leq 0.4DC$		$a_p \leq 0.3DC$			

1. 请根据切削深度、机械钢性等使用状况调整转速及进给速度。

1. Please adjust speed and feed when the depth of cut is large or machines with low rigidity are used.

# Phoenix PXMC

可换头式铣刀  
Exchangeable Head End Mill

## PXNH+PXMC

# Cutting Conditions

### ■ 切削条件基准表 Cutting Conditions

侧铣 PXNH + PXMC 超短型 Side Milling, PXNH+PXMC Extra Short Type

加工材料 Work Material	铸铁 Cast Iron FC250		碳素钢 Carbon Steel		合金钢 Alloy Steel		调质钢·预硬钢(快削) Hardened Steel Pre-hardened Steel (Free-Cutting) (~45HRC)		不锈钢 Stainless Steel SUS304	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	5,160	1,440	6,840	1,670	5,720	1,060	4,300	520	3,050	320
12	4,300	1,200	5,700	1,400	4,770	880	3,580	430	2,540	270
16	3,220	1,240	4,280	1,430	3,580	900	2,680	450	1,900	280
20	2,570	1,320	3,420	1,520	2,860	960	2,140	460	1,520	300
25	1,600	900	2,290	1,120	1,830	680	1,330	330	910	200
32	与标准刀柄组合, 最长L/D=5 Maximum length of L/D=5 in combination with the standard shank									
切削深度 Depth of Cut	ap=0.5DC ae=0.4DC						ap=0.5DC ae=0.3DC		ap=0.5DC ae=0.2DC	

侧铣 PXNH + PXMC 短型 Side Milling, PXNH+PXMC Short Type

加工材料 Work Material	铸铁 Cast Iron FC250		碳素钢 Carbon Steel		合金钢 Alloy Steel		调质钢·预硬钢(快削) Hardened Steel Pre-hardened Steel (Free-Cutting) (~45HRC)		不锈钢 Stainless Steel SUS304	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	4,300	1,300	5,720	1,510	4,760	950	3,720	410	3,300	300
12	3,580	1,080	4,770	1,260	3,970	790	3,100	340	2,750	250
16	2,680	1,110	3,580	1,290	2,980	810	2,320	360	2,060	260
20	2,140	1,180	2,860	1,360	2,380	860	1,850	370	1,650	270
25	1,330	810	1,900	1,000	1,530	610	1,150	260	980	180
32	与标准刀柄组合, 最长L/D=5 Maximum length of L/D=5 in combination with the standard shank									
切削深度 Depth of Cut	ap=0.5DC ae=0.4DC						ap=0.5DC ae=0.3DC		ap=0.5DC ae=0.2DC	

1. 请根据切削深度、机械钢性等使用状况调整转速及进给速度。

1. Please adjust speed and feed when the depth of cut is large or machines with low rigidity are used.

槽铣 PXNH + PXMC 超短型 Slot Milling, PXNH+PXMC Extra Short Type

加工材料 Work Material	铸铁 Cast Iron FC250		碳素钢 Carbon Steel		合金钢 Alloy Steel		调质钢·预硬钢(快削) Hardened Steel Pre-hardened Steel (Free-Cutting) (~45HRC)		不锈钢 Stainless Steel SUS304	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	4,460	1,260	6,360	1,550	5,090	920	3,560	260	2,660	190
12	3,720	1,050	5,300	1,290	4,240	770	2,970	220	2,220	160
16	2,780	1,120	3,980	1,400	3,180	840	2,220	240	1,660	180
20	2,070	1,040	2,980	1,320	2,380	800	1,590	220	1,210	160
25	1,520	980	2,300	1,290	1,780	730	1,210	200	890	150
32	与标准刀柄组合, 最长L/D=5 Maximum length of L/D=5 in combination with the standard shank									
切削深度 Depth of Cut	$a_p \leq 0.5DC$									

槽铣 PXNH + PXMC 短型 Slot Milling, PXNH+PXMC Short Type

加工材料 Work Material	铸铁 Cast Iron FC250		碳素钢 Carbon Steel		合金钢 Alloy Steel		调质钢·预硬钢(快削) Hardened Steel Pre-hardened Steel (Free-Cutting) (~45HRC)		不锈钢 Stainless Steel SUS304	
	外径 Mill Dia. (mm)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )	进给速度 Feed (mm/min)	转速 Speed (min <sup>-1</sup> )
10	3,350	1,080	4,760	1,330	3,820	790	2,890	230	2,280	170
12	2,790	900	3,970	1,110	3,180	660	2,410	190	1,900	140
16	2,080	960	2,980	1,200	2,380	720	1,800	210	1,420	150
20	1,470	890	2,190	1,150	1,800	760	1,310	200	1,020	140
25	1,140	840	1,720	1,110	1,330	630	980	180	760	130
32	与标准刀柄组合, 最长L/D=5 Maximum length of L/D=5 in combination with the standard shank									
切削深度 Depth of Cut	$a_p \leq 0.5DC$									


1. 请根据切削深度、机械钢性等使用状况调整转速及进给速度。

1. Please adjust speed and feed when the depth of cut is large or machines with low rigidity are used.

# Cutting Data

加工数据 Cutting Data

## 工具刚性的比较(悬长不同) Tool Rigidity Comparison (by overhang length)

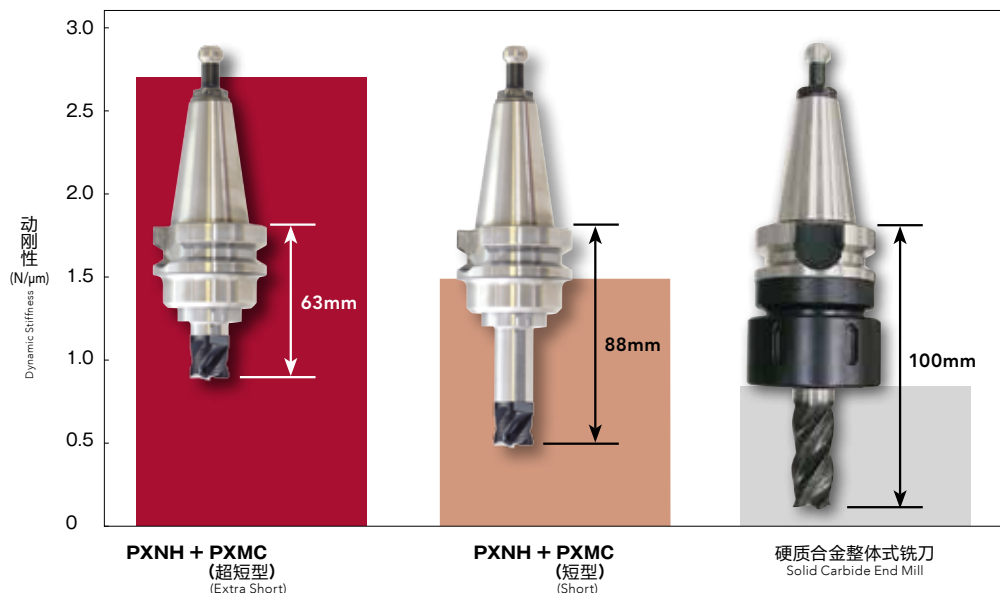

■ PXMC 夹具 Collet  
• 超短型  
Extra Short Type

• 短型  
Short Type

■ PXM 刀头 Head  
• PXNH

与硬质合金整体式铣刀相比, PXMC 短型可以达到1.5倍、超长型可以达到3倍的动刚性, 可以减轻振动、实现广泛的切削领域。所谓动刚性是动载荷下抵抗变形的特性。切削时动刚性越大加工越稳定。

In comparison to the solid carbide end mill, the PXMC short type holder demonstrated 1.5 times the dynamic rigidity, while the extra short type holder demonstrated 3 times the dynamic rigidity. Both had exhibited minimal vibration, making them applicable to accommodate a wide machining range. Chatter vibration is commonly caused by the lack of sufficient dynamic rigidity to stabilize parts in a dynamic cutting force. Vibration can change as the result of a change in force, a change in rigidity, or both. The greater the dynamic rigidity the more machining stability can be achieved.


## 工具不同, 加工领域的区别 Applicable Cutting Range Difference by Tooling Holders

### 槽铣 Slot Milling


使用工具 Tool	刀头 Head	PXNH160C16-04C006	PXNH160C16-04C006	硬质合金整体式铣刀 Solid Carbide End Mill
	夹具 Collet	PXMC-C1605 (超短型) Extra Short	PXMC-C1630 (短型) Short	标准夹具 General Collet
尺寸 Size		φ16 4刃 flutes		
加工材料 Work Material		S50C		
切削方法 Cutting Method		槽铣 Slot Milling		
切削深度 Depth of Cut		ap=8mm (0.5D)		
切削油剂 Coolant		无(气冷式) Air Blow		
使用机械 Machine		立式加工中心(BT30) Vertical Machining Center		

负荷较大的槽加工中, 使用悬长较短型可进行高效率加工。超短型的效率比硬质合金整体式铣刀提高**321%**。

Short overhang length is ideal in order to achieve high-efficiency in heavy-duty operations such as slot milling. The extra short type holder was able to demonstrate 321% the efficiency versus a solid end mill tool.



### 槽铣切削领域 Applicable Cutting Range of Slot Milling

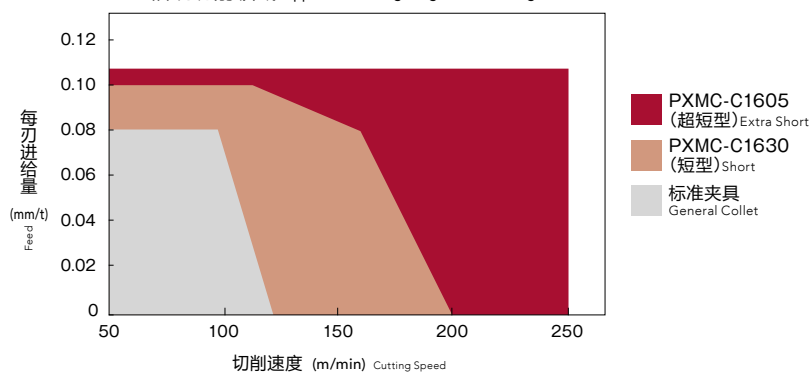


## 侧铣 Side Milling


使用工具 Tool	刀头 Head	PXNH160C16-04C006	PXNH160C16-04C006	硬质合金整体式铣刀 Solid Carbide End Mill
夹具 Collet		PXMC-C1605 (超短型) Extra Short	PXMC-C1630 (短型) Short	标准夹具 General Collet
尺寸 Size		φ16 4刃 flutes		
加工材料 Work Material		S50C		
切削方法 Cutting Method		侧铣 Side Milling		
切削深度 Depth of Cut		ap=10mm (0.63D) ae=6.4mm (0.4D)		
切削油剂 Coolant		无(气冷式) Air Blow		
使用机械 Machine		立式加工中心(BT30) Vertical Machining Center		

排屑性良好，超短型·短型都可以稳定加工，但是悬长更短的超短型更适合高效率加工。

Although both of the extra short and short type holders were able to achieve good chip evacuation, the extra short holder, which has the shortest overhang length, is the most ideal for high efficiency machining.



侧铣切削领域 Applicable Cutting Range of Side Milling

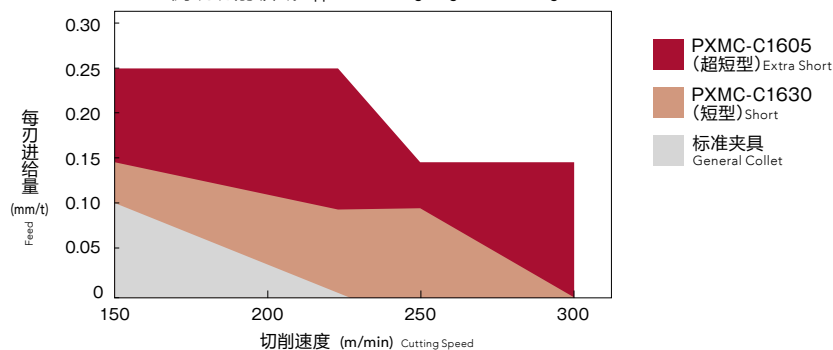


## 形状加工 Profile Milling


使用工具 Tool	刀头 Head	PXNH160C16-04C006	PXNH160C16-04C006	硬质合金整体式铣刀 Solid Carbide End Mill
夹具 Collet		PXMC-C1605 (超短型) Extra Short	PXMC-C1630 (短型) Short	标准夹具 General Collet
尺寸 Size		φ16 4刃 flutes		
加工材料 Work Material		S50C		
切削方法 Cutting Method		形状加工 Profile Milling		
切削深度 Depth of Cut		ap=8mm (0.5D) ae=4.8mm (0.3D)		
切削油剂 Coolant		无(气冷式) Air Blow		
使用机械 Machine		立式加工中心(BT30) Vertical Machining Center		

硬质合金整体铣刀其承受加工负荷的圆弧角部发生较大的噪音。另一边PXMC超短型·短型可以稳定加工。

For heavy-duty operations with significant load on the cutter corners, the solid carbide end mill exhibited chattering while both the PXM extra short and short type holders were able to achieve stable performance.



形状加工切削领域 Applicable Cutting Range of Profile Milling

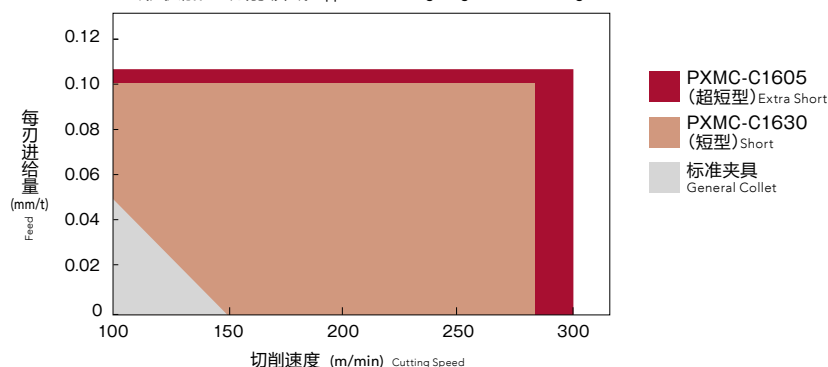

# Performance Evaluation

## 性能评价 Performance Evaluation


**现状 Problem**

如右图所示，在小型加工中心中高效加工工件时，出现下述问题

- 大径刀具···锋利性与重量
- 小径铣刀···切深量的极限
- 中等尺寸···效率可以，但成本高

To machine a work piece (such as figure shown on right) at high-efficiency settings on a small-size machining center, common problems include the following:

- Large diameter cutter: inferior in terms of sharpness and weight
- Small diameter cutter: Limited by output and efficiency
- Mid-size cutter: Ideal efficiency but expensive

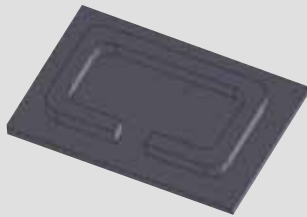

**解决后 Solution**

使用PXMC 实现轻量化。解决了悬长引起的问题、实现前所未有的加工效率。  
The PXMC was able to resolve the problem by reducing the overhang length, tool weight, while achieving highly efficient performance.

### 不同种类道具的特点 Features by Diameter Size

《现状 Problem》

	小径铣刀 Small diameter cutter	中等尺寸 Mid-size cutter	大径刀具 Large diameter cutter
成本 Cost	△	×	○
效率 Efficiency	×	○	△
稳定加工 Stability	○	△	×
悬长 Overhang Length	○	×	△
重量 Weight	○	△	×

《解决后 Solution》 By changing Solid mid-size end mill to exchangeable head end mill with PXMC collet

	小径铣刀 Small diameter cutter	PXMC	大径刀具 Large diameter cutter
成本 Cost	△	○	○
效率 Efficiency	×	◎	△
稳定加工 Stability	○	○	×
悬长 Overhang Length	○	○	△
重量 Weight	○	○	×

◎=很好 ○=良好 △=普通 ×=差  
◎=Very Good ○=Good △=Fair ×=Bad

### 总排屑量在1,000cm<sup>3</sup> 时加工时间与损伤情况的对比例 Machining time and tool wear comparison after total chip emission of 1,000cm<sup>3</sup>/min.

工具 Tool	小径硬质合金整体式铣刀 φ8 4刃 Solid Carbide End Mill	PXNH160C16-04C006 φ16 4刃 flutes	可转位式刀具 φ32 4刃 Indexable Tool
使用工具 Tool	小径硬质合金整体式铣刀 φ8 4刃 Solid Carbide End Mill	PXNH160C16-04C006 φ16 4刃 flutes	可转位式刀具 φ32 4刃 Indexable Tool
夹具 Holder	弹簧夹头 Collet Chuck	PXMC-C1605	铣刀夹头 Milling Chuck
工件 材质·尺寸 Work: Material·Size	S50C (250×300×18mm)		
加工条件 Cutting Condition	侧铣 Thrust side milling n=1,800min <sup>-1</sup> 、 Vf=5,370mm/min ap=9mm×2段、 ae=1.6mm Stages	侧铣 Thrust side milling n=5,970min <sup>-1</sup> 、 Vf=4,770mm/min ap=9mm×2段、 ae=3.2mm Stages	等高线加工 Contour milling n=1,900min <sup>-1</sup> 、 Vf=600mm/min ap=0.5mm×36段、 ae=16mm Stages
悬长 Overhang Length	95mm	63mm	150mm
排屑量 M.R.R.	25.9cm <sup>3</sup> /min	173.3cm <sup>3</sup> /min	4.8cm <sup>3</sup> /min
加工时间 Time	38分37秒 38min. 37sec.	7分17秒 7min. 17sec.	208分20秒 208min. 20sec.
损伤 Damage	细小崩刃 Small Chipping	初期磨损 Initial Wear	磨损大 Large Wear
评价 Evaluation	△	◎	×

## ■ 装卸顺序 Mounting Procedure



### ①临时拧紧 (BT30) Initial Tightening

清扫刀柄的安装部分，并插入。  
转动牵引螺栓，使其临时拧紧。

※ BT30以外的请参考下面。

Make sure the fastening portion of the collet is clean then insert it into the holder. Turn the pull stud to tighten.

\*For models other than BT30 please refer to the instructions below.

### ②最终拧紧 Final Tightening

用扳手拧紧

Tighten with a spanner wrench

### ③清扫 Cleaning

清除刀头、夹头安装部的垃圾及污垢。

Remove dirt and chips from the connecting thread and collet



### ④安装刀头 Mounting the Head

用手拧紧后，再用 PXM 专用扳手拧紧。

After screwing the head in by hand, use the PXM spanner wrench to tighten.


### ※ BT30以外的安装顺序 Mounting procedure for holders other than BT30

#### ①在螺纹六角部插入六角扳手。

※有孔的牵引螺栓(Φ6以上)时，可将牵引螺栓安装着进行操作。

Insert the hexagonal socket wrench into the pull screw hexagonal section.

\*For pull studs with holes (Φ6 or above), it is operational with the stud being attached.

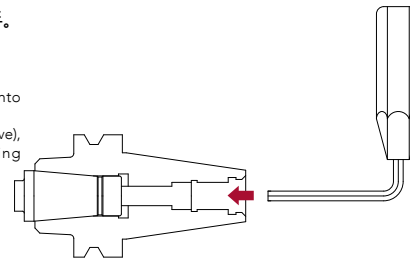


#### ②不转动夹头，在夹头的先端处握住扳手进行转动(右转)。

按指定扭矩进行安装。

※推荐安装扭矩：18N·m

To prevent the collet from rotating, support the tip of the collet by hand, tighten with the wrench by turning to the right, then fastening to the required torque.

\*Recommended tightening torque: 18N·m



### 使用上的注意

Cautions during use

- 安装刀头时请使用 PXM 专用扳手。(非专用扳手不能使用。)
- 推荐安装扭矩请参考 P.211。
- 刀头与夹头端面安装时，请确认无间隙。
- 安装部脱油会使得安装更加困难，有可能达不到端面。所以请勿脱油。
- 请将扳手插入刀头凹槽处，慢慢回转。

- Only use the spanner wrenches that are designed specifically for the PXM (p.211) for attaching PXM heads.
- Please do not use alternative spanner wrenches sold on the market as a replacement.
- Please refer to p.211 for tightening torque.
- Please tighten until the head and the collet faces meet. Confirm that there is no gap.
- Degreasing the connecting thread may result in over tightening or a possible separation of the faces. Please do not degrease.
- Please make sure that the spanner wrench is inserted properly and turn it slowly during use.

# Dimensions






■ 安装部尺寸表 Dimensions

刀盘型刀具 Bore Type Cutter

外径 DC	孔径 DCON	刀盘径 DCSFMS	DAH	DCCB	装夹孔高 CBDP	端面键槽 Key Slot		刀具 高度 LF	形状 Type	固定螺丝 Clamping Screw	适用刀具 Applicable Cutters	推荐芯轴规格 Recommended Arbor Specification
						宽度 KWW	深度 b					
40	16	38	PS	PS	20	8.4	5.6	40	①	Power Screw	PSE11..., PSE15... PHC09..., PHC12...	FMC16
50	16	40	9	15	20	8.4	5.6	55	②	M8 × 30	PFAL	FMC16
	22	45	PS	PS	21	10.4	6.3	40	①	Power Screw	PSE11..., PSE15... PAO..., PRC16..., PSTW	FMC22
			11	17							PSF, PRC12..., PRC16...	
		50		PAS								
22.225	47				8.4	5	50	②	M10 × 30	PHC09..., PHC12... PHC09..., PHC12...	FMA22.225	
54	22	45	11	17	21	10.4	6.3	63	②	M10 × 30	PZAG13...	FMC22
58	22	45	11	17	21	10.4	6.3	63	②	M10 × 30	PZAG13...	FMC22
62	22	45	11	17	21	10.4	6.3	63	②	M10 × 30	PZAG13...	FMC22
63	22	45	11	18	21	10.4	6.3	55	②	M10 × 30	PFAL	FMC22
		50						PAS, PAO, PSF, PSTW PSE11..., PSE15... PRC12..., PRC16...				
		22.225						60			PHC09..., PHC12... PHC09..., PHC12...	
67	22	45	11	17	21	10.4	6.3	63	②	M10 × 30	PZAG13...	FMC22
72	22	45	11	17	21	10.4	6.3	63	②	M10 × 30	PZAG13...	FMC22
76	22	45	11	17	21	10.4	6.3	63	②	M10 × 30	PZAG17...	FMC22
80	25.4	60	13.3	20.5	23	9.5	6	50	②	M12 × 40	PAS, PAO, PSF, PSTW PSE11..., PSE15... PRC12..., PRC16...	FMC25.4
		70	-	40	28							
	27	60	13	20	22	12.4	7	50	②	M12 × 40	PSE11..., PSE15... PSTW PRC12..., PRC16...	FMC27
		70	-	40	28							
		31.75	76	13	20						22	
31.75	76	16.5	26	32	12.7	8	63	②	M12 × 40 M16 × 40	PHC12... PHC12...	FMA31.75	
82	22	45	11	17	21	10.4	6.3	63	②	M10 × 30	PZAG17...	FMC22
100	25.4	80	-	40	28	9.5	6	50	③	MBA-M12	PFAL	FMC25.4
	27			44.45	32						12.7	
	31.75	70	44.45	32	12.7	8	50	③	MBA-M16	PAS, PAO, PSE15..., PSTW PRC12..., PRC16...	FMA31.75	
		80	55									
		96										
	32	70	16.5	26	25	14.4	8	50	②	M16 × 40	PHC12...	FMC32
		70	18	27	26							
96		17	27	26								
80		-	55	32								
82	22	45	11	17	21	10.4	6.3	63	②	M10 × 30	PZAG17...	FMC22
125	25.4	80	-	40	28	9.5	6	50	③	MBA-M12	PFAL	FMC25.4
	27			44.45	32						12.7	
	38.1	90	53.85	38	15.9	10	63	③	MBA-M20	PAS, PAO, PSE15..., PSTW	FMA38.1	
		80	60	30	16.4	9.2						
		90	56	28	16.4	9						
40	80	22	56	28	16.4	9	63	②	M16 × 40	PSTW	FMB40	
160	25.4	80	-	40	28	9.5	6	50	③	MBA-M12	PFAL	FMC25.4
	27			44.45	32						12.7	
	40	85	60	30	16.4	9.2	63	③	MBA-M20	PFAL	FMB40	
	50.8	100	70	38	19.1	11						
			74.42	38	19	11						
200	47.625	150	-	-	38	25.4	14	63	④	M16 × 40(4本)	PAO	FMA47.625

粗加工型铣刀 刀盘型 Roughing End Mill Bore Type

外径 DC	孔径 DCON	刀盘径 DCSFMS	DAH	DCCB	装夹孔高 CBDP	端面键 槽宽度 KWW	端面键 槽深度 b	刀具 高度 LF	形状 Type	固定螺丝 Clamping Screw	适用刀具 Applicable Cutters	推荐芯轴规格 Recommended Arbor Specification						
50	22	45	11	18.4	21	10.4	6.3	74	⑤	M10 × 25	PSEL15...	FMC22						
				17														
	27	48.5	13	18.5				23					12.4	7.0	75	M12 × 30	PSFL09...	FMC27
				100														
63	27	60	13	21.8	23	12.4	7.0	74	⑤	M12 × 30	PSEL15...	FMC27						
								85										
								125										
80	32	76	18	28	28	14.4	8.0	88	⑤	M16 × 70	PSEL15...	FMC32						
				25														
				77.3				95										
100	32	97	18	25	28	16.4	9.0	143	⑤	M16 × 70	PSFL12...	FMC32						
								153										

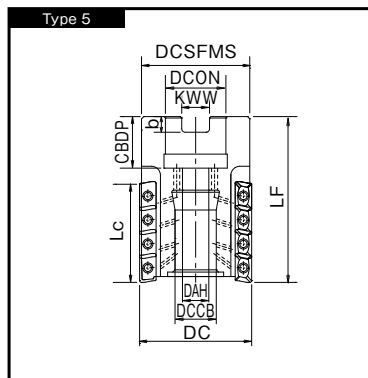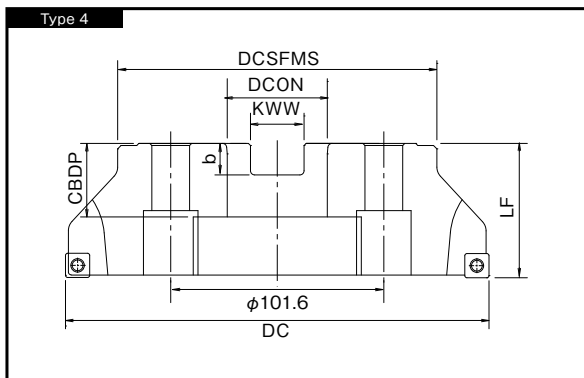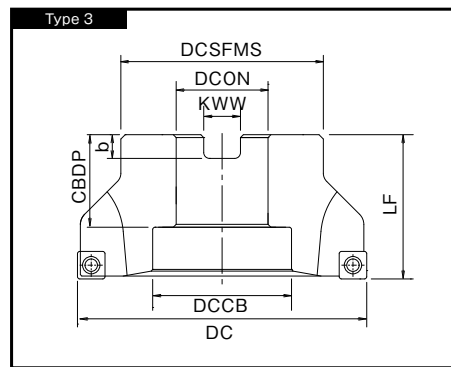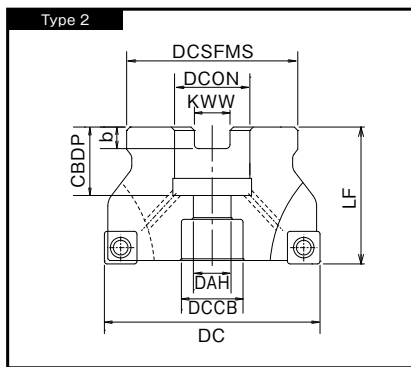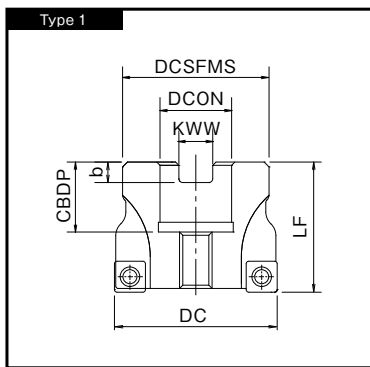

PXD

PD

PHP

PZAG

PAS

PAO

PSF

PSFL

PSE

PSEL

PSTW

PHC

PRC

PDR

PFAL

PFB

PFR

SF

PXM

PXMC

Clamping Screw · Body Dimensions  
紧固螺丝 · 安装方法

## Parts

■ 零件 Parts

## 固定螺丝、推荐安装扭矩 Clamping Screw Tightening Torque

商品号 EDP No.	名称 Designation	螺纹尺寸 Thread Size	梅花尺寸 Torx size	安装扭矩 Tightening Torque	适用刀具(适用刀片) Applicable Cutters(Applicable Inserts)
7808096	FS18536P	M 1.8 × 3.6	06IP	0.7 N·m	PZAG04...SS φ14(ZPNT04)
7808100	FS18538	M 1.8 × 3.8	T06	0.7 N·m	PHP φ14-16 (SCMT04...)
7808102	FS20540	M 2 × 4	T06	0.7 N·m	PHP φ16.5-18 (SCMT05...)
7808104	FS22550	M 2.2 × 5	T07	1.0 N·m	PHP φ18.5-20.5 (SCMT06...)
7808138	FS22550P	M 2.2 × 5	07IP	1.0 N·m	PZAG06...SS φ17.5-23(ZPNT06)
7808105	FS25550	M 2.5 × 5	T08	1.6 N·m	PHC07...
7808107	FS25656P	M 2.5 × 5.6	08IP	1.6 N·m	PSE11... SS/SF
					PSEL11... SS φ25
7808108	FS25560	M 2.5 × 6	T08	1.6 N·m	PHP φ21-24 (SCMT07...)
7808109	FS25673P	M 2.5 × 7.3	08IP	1.6 N·m	PSE11... BORE
					PSEL11... SS φ32-40
7808135	FS30570P	M 3 × 7	09IP	2.2 N·m	PZAG09...SS φ26-48(ZPNT09)
7808110	FS30573	M 3 × 7.3	T08	1.6 N·m	PHP φ24.5-28 (SCMT08...)
					PSF...
					PSFL09...SS/BORE φ32-50(SD*T09...)
7808116	FS30573A	M 3 × 7.3	T10	2.0 N·m	PRC10...
7808111	FS35572	M 3.5 × 7.2	T15	3.2 N·m	PHP φ29-34 (SCMT10...)
					PHC09... SS/SF φ25-35
7808112	FS35586	M 3.5 × 8.6	T15	3.2 N·m	PHC09... SS/SF φ40, PHC09... BORE
					PRC12...
7808115	FS35686P	M 3.5 × 8.6	15IP	3.2 N·m	PSE15...
					PSEL15...
7808129	FS40511	M 4.0 × 11	T15	5.0 N·m	PSTW...
					PSFL12...BORE φ63-100(SD*T12...)
7808113	FS45510	M 4.5 × 10.5	T20	5.0 N·m	PHP φ35-40 (SCMT12...)
					PHC12...
					PRC16...
7808114	FS45510P	M 4.5 × 10	20IP	5.0 N·m	PZAG13...BORE φ54-82(ZPNT13,ZPNT17)
7808131	FS45513P	M 4.5 × 13	20IP	5.0 N·m	PAS...
7808130	FS50614	M 5 × 14	T20	5.0 N·m	PAO...
7808125	FS60620	M 6 × 17	T25	10.0 N·m	PFAL...

## PD用固定螺丝 Clamping Screw for PD

商品号 EDP No.	名称 Designation	螺纹尺寸 Thread Size	梅花尺寸 Torx size	安装扭矩 Tightening Torque	刀具外径(适用刀片) Tool Outer Diameter (Applicable Inserts)
7808096	FS18536P	M 1.8 × 3.6	06IP	0.7 N·m	φ12-14.5(XCMT03...)
7808139	FS20543P	M 2 × 4.3	06IP	0.7 N·m	φ15-18.5 (XCMT04..., XCMT05...)
7808138	FS22550P	M 2.2 × 5	07IP	1.0 N·m	φ19-20.5 (XCMT06...)
7808136	FS25560P	M 2.5 × 6	08IP	1.6 N·m	φ21-24.5 (XCMT07...)
7808135	FS30570P	M 3 × 7	09IP	2.2 N·m	φ25-33.5 (XCMT08..., XCMT09...)
7808137	FS35586P	M 3.5 × 8.6	15IP	3.2 N·m	φ34-44 (XCMT10..., XCMT12...)
7808114	FS45510P	M 4.5 × 10.5	20IP	5.0 N·m	φ45-63 (XCMT13..., XCMT14..., XCMT16...)

IP:トルクスプラス IP:Torx-Plus

# Insert · Cutter Body Selection Guide

## 根据刀片/ 断屑槽名称检索刀体 Search by Alphabetical Order of Insert Designation

刀片名称 Insert Designation	刀体 Body	加工方法 Method	页码 Page
ADMT...	PDR SS, MT, CN, BORE	铣削加工 Milling	P. 143 - P. 150
FR1204, FR1206, FR1204-W	PFAL BORE		P. 151 - P. 160
OZKU...	PAO BORE		P. 69 - P. 74
PFB...	PFB, SF		P. 161 - P. 170
PFR...	PFR, SF		P. 171 - P. 186
RPHT...	PRC SS, BORE, SF		P. 133 - P. 142
RPHW...			
RPMT...			
SCMT...	PHP	钻孔加工 Drilling	P. 53 - P. 58
SDKT..., SDHT...	PSF SS, BORE / PSFL SS, BORE	铣削加工 Milling	P. 75 - P. 78 P. 79 - P. 84
SDMT..., SPMT..., SXMT...	PHC SS, BORE, SF		P. 119 - P. 132
SNKU...	PAS BORE		P. 65 - P. 68
TNHU..., TNKU...	PSTW BORE		P. 111 - P. 118
XAHT...	PAO BORE		P. 69 - P. 74
XCMT...	PD		钻孔加工 Drilling
ZDHT..., ZDKT...	PSE SS, BORE, SF / PSEL SS, BORE	铣削加工 Milling	P. 85 - P. 100 P. 101 - P. 110
ZPNT...	PZAG SS, BORE	钻孔加工 Drilling	P. 59 - P. 64

## 根据刀体检索刀片 Search by Listed Order

加工方法 Method	刀体 Body	刀片名称 Insert Designation	页码 Page
钻孔加工 Drilling	PD	XCMT...	P. 33 - P. 52
	PHP	SCMT...	P. 53 - P. 58
	PZAG SS, BORE	ZPNT...	P. 59 - P. 64
铣削加工 Milling	PAS BORE	SNKU...	P. 65 - P. 68
	PAO BORE	OZKU...	P. 69 - P. 74
		XAHT...	
	PSF SS, BORE PSFL SS, BORE	SDKT..., SDHT...	P. 75 - P. 78 P. 79 - P. 84
	PSE SS, BORE, SF PSEL SS, BORE	ZDHT..., ZDKT...	P. 85 - P. 100 P. 101 - P. 110
	PSTW BORE	TNHU..., TNKU...	P. 111 - P. 118
	PHC SS, BORE, SF	SDMT..., SPMT..., SXMT...	P. 119 - P. 132
	PRC SS, BORE, SF	RPHT...	P. 133 - P. 142
		RPHW...	
		RPMT...	
	PDR SS, MT, CN, BORE	ADMT...	P. 143 - P. 150
	PFAL BORE	FR1204, FR1206, FR1204-W	P. 151 - P. 160
	PFB, SF	PFB...	P. 161 - P. 170
PFR, SF	PFR...	P. 171 - P. 186	

## 欧士机（上海）精密工具有限公司

## OSG Corporation

### 欧士机（上海）本部

地址：上海市长宁区长宁路1133号 长宁来福士广场T1办公楼10层1003-07单元  
电话：021-52552588； 传真：021-58883300； 邮编：200051

### 欧士机（上海）无锡事务所

地址：无锡市滨湖区汇金广场B座1801室  
电话：0510-82739271； 传真：0510-82739220； 邮编：214074

### 欧士机（上海）芜湖事务所

地址：芜湖市镜湖区汇金广场B座1801室  
电话：0553-5868160； 传真：0553-5868190； 邮编：241000

### 欧士机（上海）苏州事务所

地址：苏州工业园区翠园路181号商旅大厦1511室  
电话：0512-62388327； 传真：0512-62388320； 邮编：215028

### 欧士机（上海）杭州萧山事务所

地址：杭州市萧山区建设一路66号华瑞中心3幢1703室  
电话：0571-82757757； 传真：0571-82757767； 邮编：311215

### 欧士机（上海）宁波事务所

地址：宁波市鄞州区天童南路700号荣安大厦A座207室  
电话：0574-88161548； 传真：0574-88134670； 邮编：315199

### 欧士机（上海）广州分公司

地址：广州市天河区林和西路157号保利中汇大厦A1701房  
电话：020-38210423； 传真：020-38210425； 邮编：510610

### 欧士机（上海）深圳事务所

地址：深圳市福田区福民路福民佳园2129C室（福民地铁站A出口）  
电话：0755-83566532； 传真：0755-83558854； 邮编：518048

### 欧士机（上海）柳州事务所

地址：广西柳州市桂中大道南端阳光壹佰城市广场第2幢第23层第4号房  
电话：0772-8250338； 传真：0772-8250328； 邮编：545006

### 欧士机（上海）北京分公司

地址：北京市朝阳区建国门外大街19号国际大厦A座18-05C  
电话：010-85261018； 传真：010-85261016； 邮编：100004

### 欧士机（上海）天津分公司

地址：天津市和平区南马路11号和平创新大厦10层1018室  
电话：022-23037566； 传真：022-23037577； 邮编：300020

### 欧士机（上海）郑州事务所

地址：河南省郑州市陇海路与嵩山路溪山御府1号院3号楼1单元1002  
电话：186-3092-1318； 邮编：450016

### 欧士机（上海）西安事务所

地址：西安市未央区凤城五路雅荷春天13号楼3单元301室  
电话：029-88860594； 传真：029-88860594； 邮编：710000

### 欧士机（上海）大连分公司

地址：大连开发区凯伦国际大厦B2006  
电话：0411-87655185； 传真：0411-87655186； 邮编：116600

### 欧士机（上海）青岛分公司

地址：青岛市市北区龙城路30号万达广场3号楼1单元2803室  
电话：0532-66775787； 传真：0532-66775797； 邮编：266034

### 欧士机（上海）沈阳事务所

地址：沈阳市铁西区兴华北街55号 华润置地广场南N号楼32-04  
电话：024-22852762 传真：024-22852763 邮编：110021

### 欧士机（上海）长春事务所

地址：长春市高新区硅谷大街888号盈泰国际2单元1405室  
电话：0431-89388499； 传真：0431-89230366； 邮编：130012

### 欧士机（上海）成都事务所

地址：成都市武侯区人民南路四段27号商鼎国际2栋1单元803号  
电话：028-65783992； 传真：028-85005292； 邮编：610042

### 欧士机（上海）重庆分公司

地址：重庆市渝北区龙溪街道金山路18号 中渝都会首站 4幢12-1  
电话：023-67136872； 邮编：401120

### 欧士机（上海）武汉事务所

地址：武汉市江岸区三阳路长江国际B1座2505室  
电话：027-85557360； 传真：027-85557350； 邮编：430010

### 欧士机（上海）长沙事务所

地址：湖南长沙市天心区湘江中路36号华远SOHO 1613  
电话：0731-88620770； 传真：0731-88620770； 邮编：410000

[Http://www.chinaosg.com](http://www.chinaosg.com)

OSG 免费技术热线

400 888 2086

9:00~12:00/13:00~17:00 双休日除外

E-mail: [business@chinaosg.com](mailto:business@chinaosg.com)



样本印刷使用  
环保植物性大豆油墨



微信关注我们