


visio touch Control Panel P406

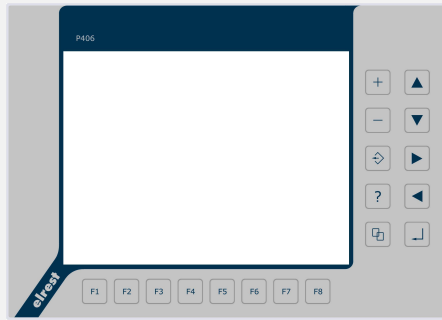

- **6,5" TFT LC display 640 x 480 pixel**
- **touch control**
- **onboard interfaces**

Technical data

Graphic display		6,5" LCD-TFT VGA 640 x 480 pixel
Input		Touchscreen, 18 buttons
Audio	optional	Speaker, beeper, stereo out
Memory		64 MB RAM, 32 MB flash, 1 MB SRAM battery-buffered
Memory expansion		elrest CFC; compact flash card up to 2 GB
Processor		32 Bit Intel XScale PXA-520 MHz
Data buffering		persistent data in flash, real-time clock and retain data battery-buffered
Operating system		Microsoft Windows CE 5.0
PLC programming		IEC61131-3 / CoDeSys
HMI programming		ElaDesign
C/C++/C# programming		Microsoft embedded visual tools (Visual C++), Windows CE SDKs
Interface	onboard	1 x Ethernet 10/100 BaseT, 1 x CAN acc. ISO11898 galvanically isolated (CANopen), 1 x CAN acc. ISO11898 galvanically isolated (ESB and CANopen), 2 x USB 2.0-Host, 1x USB 2.0-Slave (optional) 1 x RS232, 1x RS232 + RS485/422
Supply voltage		24V _{DC} (18...30V _{DC}), 8 – 12W
Front panel		Aluminium anodized, IP54
EMI-test		EN61000-6-2, EN61000-6-4
Safety class		Front side IP54 acc. to EN60529 Rear side IP20 acc. to EN60529
Outside dimension in mm (W x H x D)		208 x 150 x 41
cut-out dimension in mm (W x H)		198 x 140
Weight approx.		900 g
Operating temperature		0° to 50°C
Order no.:		
P406T/ED/CS/24VDC		247300000

Remark: The use of standard CF-cards is generally possible. Anyhow elrest GmbH does not take any responsibility thereby.

© 2012 elrest GmbH. All rights reserved.

The information contained in this document can be changed without advance notice and represents non obligation on the part of elrest GmbH.

Images and descriptions as well as dimensions and technical data correspond to the circumstances or intentions at the time of the pressure of this brochure. Changes of every kind, particularly as far as they arise from technical progress, economic execution or similar are left. The external boarding of the devices takes place in sole responsibility.