

RB
SERIES

REPORT



new

RB Series Bistable relay

New bistable relay for control and signaling in railways and energy. 2 or 4 contacts with the possibility of direct 35 mm rail, or socket, mounting.



CE

Specification

- Nominal supply voltages 24 - 48 - 110...125 - 220...250 V DC
- 4 changeover contacts rated 8 A - direct 35 mm rail (EN 60715) mount version
2 changeover contacts rated 8 A - 11 pin socket type 90.21 mount version
- 2 coil type
- SET and RESET signals
- LED command status indication

new


RB Series

Bistable Relay 8 A




Type RB.14.9.xxx.0000

- Nominal supply voltages 24 - 48 - 110...125 - 220...250 V DC
- 4 changeover contacts 8 A
- Manual SET and RESET on the product or remote via terminals
- LED indicators green / red for current (SET and RESET)
- Modular, direct 35 mm rail (EN 60715) mount

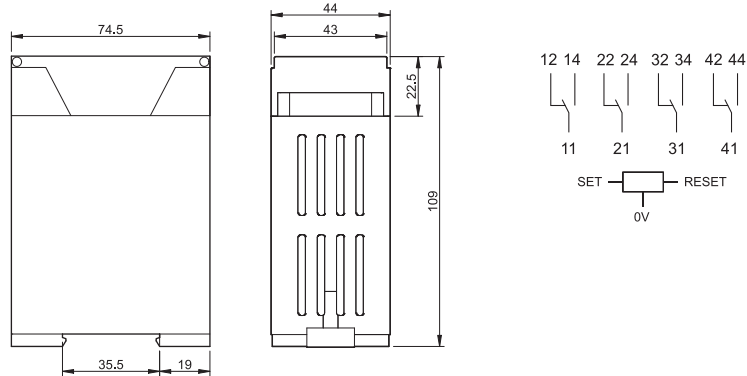

Type RB.22.9.xxx.9021

- Nominal supply voltages 24 - 110...125 - 220...250 V DC
- 2 changeover contacts 8 A
- Manual SET and RESET on the product or remote via terminals
- LED indicator green / red for the status of commands (SET and RESET)
- Plug-in, for use with socket type 90.21

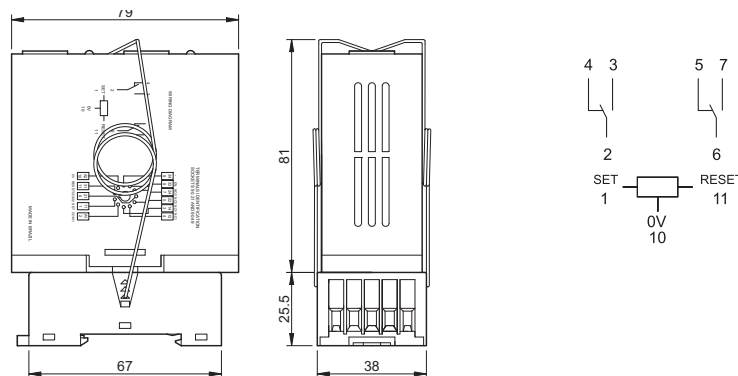

Accessories



Type 90.21 Screw terminal (Box clamp) socket panel or 35 mm rail (EN 60715) mount

