


DEF

EN



MADE IN ITALY

# DEF SOLUTIONS CATALOG

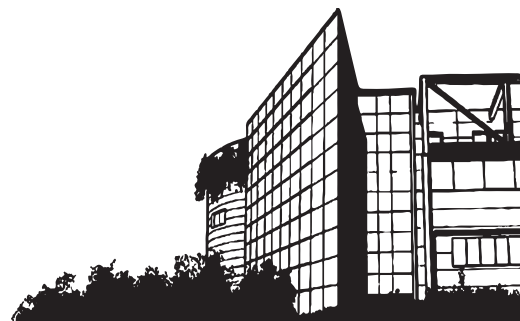

8.2022








# COMPANY PROFILE

## THE HISTORY OF KNOW-HOW

### ABOUT US

PIUSI was established in 1953 in Suzzara, in the province of Mantua (Italy). For more than 60 years, PIUSI has been the major player in the world's leading markets with its full range of products for transferring, refilling, and measuring lubricants, fuels, and liquids such as gasoline, diesel, Diesel Exhaust Fluid (DEF), oil, water, and grease. Some of PIUSI's main products include pumps, flow meters, nozzles, dispensers, hose reels, liquid level gauges, software and complete kits used by operators in agriculture, the automotive industry, workshops, and garages, fleet management and transport by road and by sea. PIUSI products have many different uses such as monitoring and transferring fuel at trucking companies, refueling of agricultural vehicles, transferring fuels in construction and mining for heavy duty vehicles. The products are intuitive and easy to use; are suitable to be installed in a variety of contexts; are all made entirely in Italy; and all products express the innovation, quality, professionalism and R&D that have always distinguished PIUSI. Its headquarters are in Suzzara (Mantua - 150 km from Milan and Venice). The company currently employs more than 250 employees between sales, administration, R&D, production and logistics. PIUSI products are sold in more than 120 countries around the world thanks to a large network of distributors and the US branch based in Fort Lauderdale, FL. serving the North and South American markets.



PRODUCT RANGE	PRODUCT CATEGORY	PRODUCTS	PAGE
<b>DEF KITS</b> 	MINI-BULK	THREE25 TANK KIT	4
	MINI-BULK DISPENSERS	SELF SERVICE MC 2.0	4
		DEF BLUE BOX PEDESTAL	4
	SUBMERSIBLE PUMP	SQUALO35	5
	TOTE	THREE25	6
		SUZZARABLU TOTE KIT	7
	DRUM	SUZZARABLU DRUM KIT	8
<b>PUMPS</b> 	ELECTRIC PUMPS	SUZZARABLU AC, SUZZARABLU DC	9
	PNEUMATIC DIAPHRAGM PUMPS	MP140, MP190	9
	HAND PUMPS	DEF PISTON HAND PUMP KIT	10
		DEF ROTARY HAND PUMP IBC KIT	10
		DEF ROTARY HAND PUMP KIT	10
	MOBILE MINI-BULK	PIUSI PORTABLE TANKS	11
<b>HOSE REELS</b> 	HOSE REELS	DEF HOSE REEL	12
<b>NOZZLES</b> 	METERED NOZZLES	SB325_X METERED NOZZLE	13
	AUTOMATIC NOZZLES	SB325_X NOZZLE, DEF A60 AUTOMATIC NOZZLE	13
	MANUAL NOZZLES	DEF MANUAL NOZZLE	13
<b>METERS</b> 	DIGITAL	K24-DEF METER	14
	PULSER	K24-DEF PULSER	14
		TURBINOX	14
		REMOTE DISPLAY	14
<b>TANK MONITORING</b> 	TANK LEVEL INDICATORS	OCIO	14
		OCIO 2.0	14
<b>ACCESSORIES</b> 	COUPLINGS AND FITTINGS	HOSETAILS, SWIVELS, CLAMP KIT, ETC	15
	SOCKETS	NPT/NPT, NPT/BSP, BSP/BSP	15
	IBC ACCESSORIES	PDC, GRAVITY KIT, ADAPTERS, COUPLERS, VALVES, ETC	15
	HOSES	SUCTION, DELIVERY	15
	ROTARY HAND PUMP ACCESSORIES	PDC WITH LATCH, ADAPTER, HOSE	15
	NOZZLE ACCESSORIES	REPLACEMENT SPOUTS, ADAPTORS, SWIVEL, PROTECTOR	15

# DEF MINI-BULK

The DEF Mini-Bulk Kits make up a complete line of **DEF transfer storage and dispense systems**. Available with customizable kit options, the system is available with either our **Three25 membrane pump kit** or our **Squalo submersible pump kit**. All standard kits include tank, pump, fill line, dispense hose and auto nozzle.

## NEW 675-GALLON TANK

### 500-GALLON TANK

Part # RK0500BULK

REFERENCE ONLY

THREE25 MINI  
BULK TANK KIT  
Part # F00101A3



### 1000-GALLON TANK

Part # RK1000BULK

REFERENCE ONLY



TANK DESIGN/PUMP OPTION/CONFIGURATION/ACCESSORIES MAY VARY FROM IMAGES ABOVE. ABOVE IMAGES ARE FOR REFERENCE ONLY.

CUSTOMIZED CONFIGURATION AVAILABLE UPON REQUEST.

1500-3000 GALLON TANKS ALSO AVAILABLE UPON REQUEST. CONTACT US DIRECTLY FOR MORE INFORMATION.

PART #	DETAILS	FLUID TYPE	FLOW RATE GPM	HORSE POWER	VOLTAGE AMP (MAX)	HOSE LENGTH (FT)	NOZZLE
RK0500BULK	500 GALLON DEF TANK KIT	A D W	9 - 10	0.5 - 0.67HP	2	20	AUTOMATIC
RK675BULK	675-850 GALLON DEF TANK KIT	A D W	9 - 10	0.5 - 0.67HP	2	20	AUTOMATIC
RK1000BULK	1000-1200 GALLON DEF TANK KIT	A D W	9 - 10	0.5 - 0.67HP	2	20	AUTOMATIC

# SQUALO35

SUBMERSIBLE PUMPS

SQUALO35 is the **first submersible pump specifically designed for use with DEF**. A centrifugal pump fitted with a turbine regenerator, built-in check valve and bypass valve, the Squalo provides both **flow rate** and up to **150ft** of dispense distance. Its **compact size** allows it to fit into both **IBC totes** and **Mini Bulk** systems. And, its dead level height is down to 1-1/4", maximizing fluid consumption.

## SQUALO35 IN TOTE

### DETAILS



- ⚡ 120V/60HZ
- ⚙️ DUTY CYCLE: 20 MIN ON/OFF
- 🕒 11-MINUTE TIMER



SQUALO IBC KIT PICTURED. IBC NOT PROVIDED



## SQUALO35 IBC KIT

FITS IN A TOTE

# 10 GPM

STANDARD SQUALO IBC KIT INCLUDES:

- RSV CONTAINER VALVE
- RPV COMPOSITE COUPLER
- 6" IBC DUAL BUNG COVER
- 20FT DELIVERY HOSE
- SQUALO35
- SB325 AUTOMATIC NOZZLE
- 1" BSP-F TO 3/4" BARB HOSETAIL AND CLAMPS
- THREE25 SUPPORT FRAME



SQUALO IBC KIT PICTURED. IBC NOT PROVIDED


PART #	DETAILS	FLUID TYPE	FLOW RATE GPM	HORSE POWER	VOLTAGE AMP (MAX)	WEIGHT LBS	PACKAGING INCH
FOO20604	SQUALO35	A D W	10	0.5HP	22	114	48 x 32 x 31
RKSQUALOK1	SQUALO IBC KIT	A D W	10	0.5HP	22	-	-
RKSQUALOK2	SQUALO MINI BULK KIT (SEE PAGE 4)	A D W	10	0.5HP	22	-	-

# THREE25

## PREMIUM DEF TRANSFER PUMP


Discover a **new dimension of fluid handling** with the Piusi Three25. Created to **ensure optimum durability and efficiency**, the Piusi Three25 is protected by our DEF 3D filter, which **prevents contamination** of your DEF and **increases life of the vehicle's catalyst**.

### DETAILS



- UP TO 9 GPM
- HOSE LENGTH: 20 FT
- AC/DC VOLTAGE
- DUTY CYCLE: 20 MIN ON/OFF

# 9 GPM

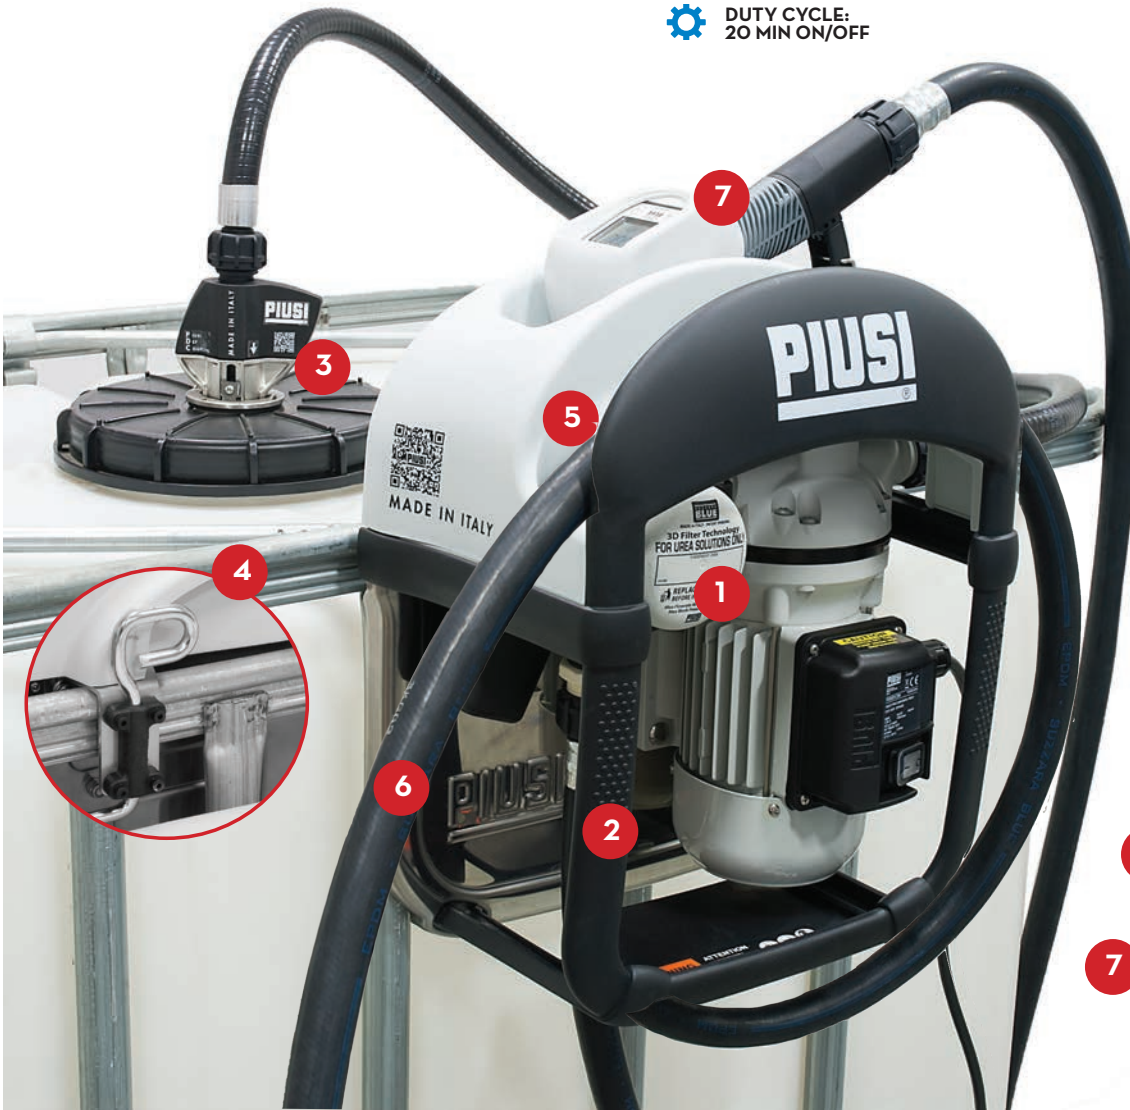

- DEF 3D Filter**  
Part # FOO611D40
- Sturdy, stainless steel, plate with roll bar protection
- Piusi DEF Coupler (PDC) for common IBC tank steel coupling systems
- New security lock bracket system
- High-Capacity Hose Holder and Practical Nozzle Holder
- Crimped EPDM delivery hose
- SB325-metered automatic nozzle with break-away system and stainless steel spout

PART #	DETAILS	FLUID TYPE	HORSE POWER	AMP MAX	HOSE LENGTH (FT)	ON/OFF SWITCH	WEIGHT LBS	PACKAGING INCH
FOO101A0	THREE25 - 120V		0.67HP	2	20	YES	32	19.3 x 15.4 x 12.2
FOO101A1	THREE25 - 12V		0.67HP	22	20	YES	28	19.3 x 15.4 x 12.2
FOO101A3	THREE25 TANK KIT (SEE PAGE 4)		0.67HP	2	-	-	28	21 x 17 x 15

# SUZZARABBLUE TOTE KIT

 UP TO 9 GPM  
 HOSE LENGTH: 20 FT

 AC/DC VOLTAGE  
 DUTY CYCLE:  
20 MIN ON/OFF

## RSV CLOSED SYSTEM

**\*\*ACCESSORIES SOLD SEPARATELY\*\***



REFILL COUPLER  
by Micro Matic  
Part # **F1713900**

COMPOSITE DISPENSE  
COUPLER  
by Micro Matic  
Part # **F2043600**

RSV STAINLESS  
STEEL DISPENSE  
COUPLER  
by Micro Matic  
Part # **F1536000**

PDC COUPLER  
FOR IBC TOTE  
Part # **F1891000A**

RSV CONTAINER VALVE  
Part # **F17137000**

6" SINGLE BUNG IBC  
COVER w/2" BUTTRESS  
by Micro Matic  
Part # **F2022600**

6" DUAL BUNG  
IBC COVER  
by Micro Matic  
Part # **F2043700**

RSV DOWN TUBE  
for 330 gallons  
Part # **F1822900**

BOTTOM  
CONNECTION KIT  
Part # **F15515020**



### PRO KIT

- HEAVY-DUTY DEF PUMP
- STAINLESS STEEL BASE
- NOZZLE HOLDER
- 20FT DELIVERY HOSE
- 4FT SUCTION HOSE
- AUTOMATIC NOZZLE
- HOSE TAIL AND CLAMPS
- K24 DEF FLOW METER


















### BASIC+ KIT

- HEAVY-DUTY DEF PUMP
- STAINLESS STEEL BASE
- NOZZLE HOLDER
- 20FT DELIVERY HOSE
- 4FT SUCTION HOSE
- AUTOMATIC NOZZLE
- HOSE TAIL AND CLAMPS



### BASIC KIT

- HEAVY-DUTY DEF PUMP
- STAINLESS STEEL BASE
- NOZZLE HOLDER
- 20FT DELIVERY HOSE
- 4FT SUCTION HOSE
- MANUAL NOZZLE
- HOSE TAIL AND CLAMPS

PART #	DETAILS	FUEL TYPE	HORSE POWER	AMP MAX	HOSE LENGTH (FT)	WEIGHT LBS	PACKAGING INCH
FOO201A1	SUZZARABBLUE TOTE 120V PRO: PUMP, METER, AUTO NOZZLE	  	0.67HP	4.7	20	35.3	18.3 x 14.6 x 10.4
FOO201A2	SUZZARABBLUE TOTE 120V BASIC: PUMP, MANUAL NOZZLE	  	0.67HP	4.7	20	27.8	18.3 x 14.6 x 10.4
FOO201A5	SUZZARABBLUE TOTE 120V BASIC+: PUMP, AUTO NOZZLE	  	0.67HP	4.7	20	32	18.3 x 14.6 x 10.4
FOO201A8	SUZZARABBLUE TOTE 12V PRO: PUMP, METER, AUTO NOZZLE	  	0.35HP	22	20	27.8	18.3 x 14.6 x 10.4
FOO201A9	SUZZARABBLUE TOTE 12V BASIC: PUMP, MANUAL NOZZLE	  	0.35HP	22	20	22	18.3 x 14.6 x 10.4

# SUZZARABLUE DRUM KIT

 UP TO 9 GPM  
 HOSE LENGTH: 20 FT

 AC/DC VOLTAGE  
 DUTY CYCLE:  
20 MIN ON/OFF



## EPV CLOSED SYSTEM

**\*\*ACCESSORIES SOLD SEPARATELY\*\***



### PRO KIT

- STAINLESS STEEL BASE
- NOZZLE HOLDER
- HEAVY-DUTY PUMP
- SB325 METERED AUTOMATIC NOZZLE
- 20 FT DELIVERY HOSE
- 1.5 FT SUCTION HOSE
- 6.5 MINUTE AUTOMATIC SHUTOFF (120V ONLY)



### BASIC+ KIT

- STAINLESS STEEL BASE
- NOZZLE HOLDER
- HEAVY-DUTY PUMP
- AUTOMATIC STAINLESS STEEL NOZZLE
- 20 FT DELIVERY HOSE
- 1.5 FT SUCTION HOSE
- 6.5 MINUTE AUTOMATIC SHUTOFF



### BASIC KIT

- STAINLESS STEEL BASE
- NOZZLE HOLDER
- HEAVY-DUTY PUMP
- MANUAL NOZZLE
- 20 FT DELIVERY HOSE
- 1.5 FT SUCTION HOSE
- 6.5 MINUTE AUTOMATIC SHUTOFF

EPV Coupler  
Part# **F16477000**



EPV Container Valve  
Part# **F16989000**



EPV Down Tube  
Part # **F16992000**


















**\*\*TOTE KIT PICTURED ON TROLLEY\*\***



### SUZZARABLUE TROLLEY CART

Part # **F1206801**  
Perfect for Three25 and SuzzaraBlue hanging kits. Capable of carrying up to 550 lbs.

PART #	DETAILS	FUEL TYPE	HORSE POWER	AMP MAX	HOSE LENGTH (FT)	WEIGHT LBS	PACKAGING INCH
FOO201A3	SUZZARABLUE DRUM 120V BASIC: PUMP, MANUAL NOZZLE	  	0.67HP	495	20	27	18.3 x 14.6 x 10.4
FOO201A4	SUZZARABLUE DRUM 120V BASIC+: PUMP, AUTO NOZZLE	  	0.67HP	495	20	31	18.3 x 14.6 x 10.4
FOO201ALB	SUZZARABLUE 120V 9GPM DRUM PRO KIT (AUTO/METER)	  	0.67HP	495	20	28	18.3 x 14.6 x 10.4
FOO201AM	SUZZARABLUE DRUM 12V PRO: PUMP, METERED AUTO NOZZLE	  	0.35HP	495	20	28	18.3 x 14.6 x 10.4
F1206801	SUZZARABLUE TROLLEY CART	  	-	-	-	59	43 x 27 x 13

# SUZZARABLU PUMPS



AC

The Piusi SUZZARABLU AC PUMP is the industry standard self-priming DEF diaphragm pump. It is equipped with electric motor, 6.5 minute timer board, and does not require dynamic seals.

UP TO 9 GPM

DUTY CYCLE:  
20 MIN ON/OFF



DC

The Piusi SUZZARABLU DC DEF PUMP is the perfect solution for mobile, battery-powered applications. This self-priming pump is equipped with a built-in pressure bypass.

PART #	DETAILS	FUEL TYPE	HORSE POWER	AMP MAX	GPM	WEIGHT LBS	PACKAGING INCH
FOO20310	SUZZARABLU AC PUMP - 120V		0.67HP	4.7	9	15.4	14 x 12 x7.9
FOO20408	SUZZARABLU DC PUMP - 12V		0.35HP	22	9	10	14 x 12 x7.9
FOO20409	SUZZARABLU AC PUMP - 24V		0.42HP	13	9	9	14 x 12 x7.9
FOO20402	SUZZARABLU AC PUMP - 12V+18FT CABLE		0.35HP	22	9	10	14 x 12 x7.9

## PIUSI MP

### AIR OPERATED DIAPHRAGM PUMP

MP140



DETAILS

- UP TO 26 GPM
- MAX SELF PRIMING: 20'
- MAX AIR SUPPLY PRESSURE: 101 PSI
- MAX PASSING SOLID: Ø0.16"



STURDY DESIGN



HEAVY DUTY MATERIALS



TECHNOP. BODY

MP190



DETAILS

- UP TO 58 GPM
- MAX SELF PRIMING: 20'
- MAX AIR SUPPLY PRESSURE: 101 PSI
- MAX PASSING SOLID: Ø0.16"



STURDY DESIGN



HEAVY DUTY MATERIALS




TECHNOP. BODY

PART #	DETAILS	FUEL TYPE	HORSE POWER	AMP MAX	GPM	WEIGHT LBS	PACKAGING INCH
FOO208P5	MP 140 PNEUMATIC DIAPHRAGM PUMP		-	-	26	11	9.4 x 15 x 13.8
FOO208P6	MP 190 PNEUMATIC DIAPHRAGM PUMP		-	-	58	29	19 x 19 x12

# DEF HAND PUMPS

The PIUSI DEF Rotary Hand Pump is the only rotary vane pump specifically designed for transferring DEF.

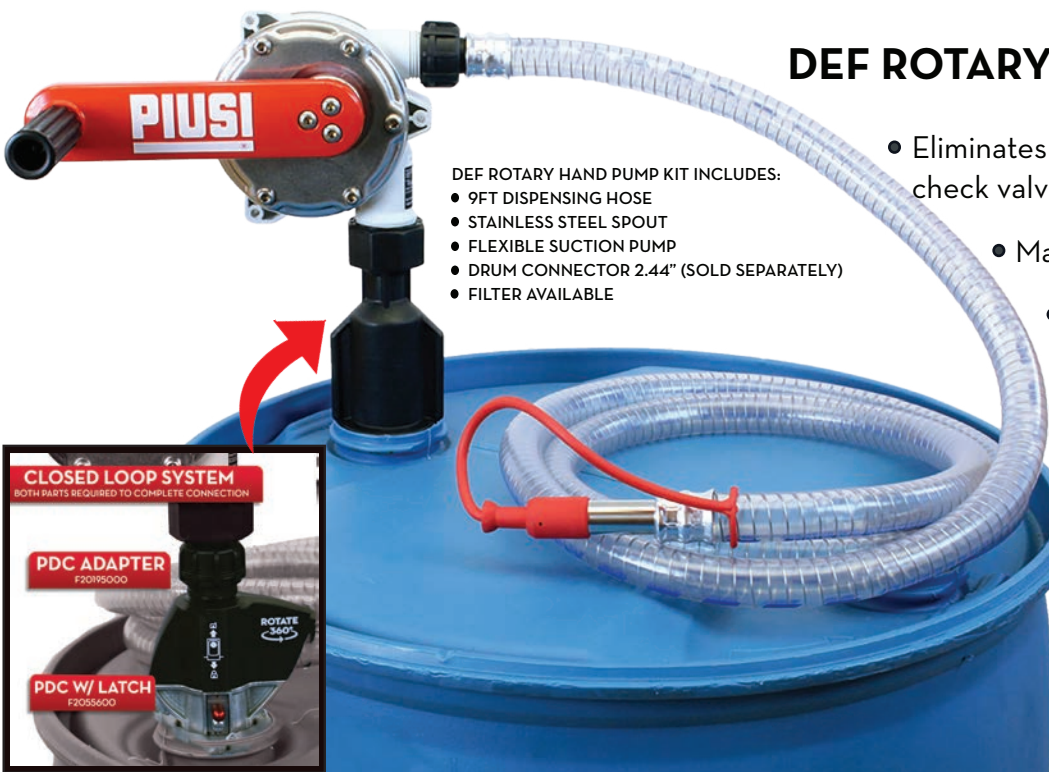

## DEF ROTARY HAND PUMP DRUM KIT

- Eliminates the siphon effect with integrated check valve and provides immediate dispensing
- Maintenance free for 250,000 gallons
- Self-Priming
- Prevent DEF crystallization

DEF ROTARY HAND PUMP KIT INCLUDES:

- 9FT DISPENSING HOSE
- STAINLESS STEEL SPOUT
- FLEXIBLE SUCTION PUMP
- DRUM CONNECTOR 2.44" (SOLD SEPARATELY)
- FILTER AVAILABLE



### DETAILS



## DEF PISTON HAND PUMP KIT

### DETAILS



## DEF ROTARY HAND PUMP IBC KIT




### DETAILS



PART #	DETAILS	FUEL TYPE	CAPACITY PER 100 REVOLUTIONS (GAL)	HOSE LENGTH (FT)	WEIGHT LBS	PACKAGING INCH
FOO33213	DEF PISTON HAND PUMP KIT	A D W W	-	10	3.3	6.3 x 13.4 x 5.5
FOO332A3	DEF ROTARY HAND PUMP KIT	A D W W	38	9	7	14 x 10 x 7
FOO332B0	DEF ROTARY HAND PUMP IBC KIT	A D W W	38	9	8	11.5 x 12 x 7

# PIUSI PORTABLE TANKS

For universal and durable **DEF transportation and storage**, the Piusi Portable Tank (PPT) offers an effective solution to deliver DEF to on-road and **off-road** vehicles. The PPT ensures a safe and quick DEF transfer utilizing its **SuzzaraBlue DC pump**, shock resistant polyethylene construction, vent cap, and stainless steel accessories. The lightweight lockable tanks are UV resistant and can be easily loaded onto your delivery vehicle.

-  12V DC
-  DUTY CYCLE:  
20 MIN ON/OFF
-  HOSE LENGTH: 13 FT



116 GALLON

## DETAILS




- 1 SuzzaraBlue 12V DC Pump
- 2 2" filling plug with integrated vent
- 3 Lockable lid
- 4 13 ft. outflow hose
- 5 SB325 Automatic Nozzle
- 6 Nozzle Holder
- 7 6.5 ft. cable with clamps
- 8 Mechanical level gauge (116g only)

PIUSI PORTABLE TANK 116G



PIUSI PORTABLE TANK 58G

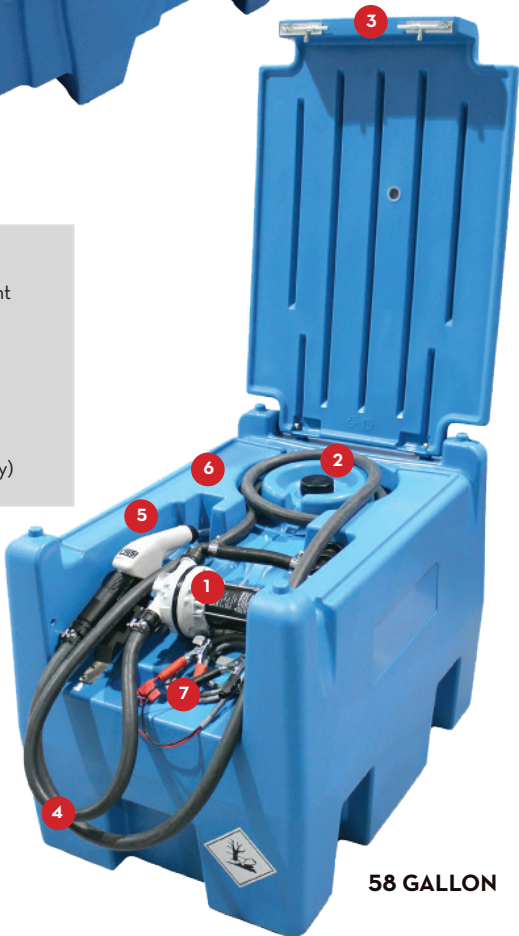







58 GALLON

## AVAILABLE ACCESSORIES

### UPGRADE TO A METERED NOZZLE





SB325 Metered  
Part # F00617010

PART #	DETAILS	FLUID TYPE	FLOW RATE GPM	HORSE POWER	VOLTAGE AMP (MAX)	WEIGHT LBS	PACKAGING INCH
F0010201	PIUSI PORTABLE TANK (116G)	  	9	0.67HP	22	114	48 x 32 x 31
F0010200	PIUSI PORTABLE TANK (58G)	  	9	0.67HP	22	53	36 x 24 x 26

# DEF HOSE REEL

Hose reels made specifically for DEF use with supply hoses. Designed to **limit pressure loss** and facilitate use. They include a protective latch mechanism that prevents accidental contact with hands. These **spring-loaded** hose reels offer **adjustable arms** for easy positioning and an optional rotating wall support for different positions.



 **MAX HOSE LENGTH: 50'**  
 **OPERATING PRESSURE: 145 PSI**

## DETAILS



HAND PROTECTION



ACCESSORIES INCLUDED



TOTE BRACKET KIT  
F17275000



ROTATING SUPPORT PLATE 25'  
F1731700A  
OPTIONAL



ROTATING SUPPORT PLATE 50'  
F1627900A  
OPTIONAL

- HOSE REEL INCLUDES:
- PROTECTIVE LATCH
  - ADJUSTABLE POSITIONING ARM
  - OPTIONAL WALL SUPPORT PLATE



EXTERNAL DEF HOSE REEL FITTING









INTERNAL DEF HOSE REEL FITTING

## HOSE REEL TOTE MOUNT BASE

Part # F1727500

PUMP, NOZZLE & HOSE REEL  
SOLD SEPARATELY



PART #	DETAILS	FUEL TYPE	HOSE LENGTH (FT)	WEIGHT LBS	PACKAGING INCH
FO0750340	DEF HOSE REEL WITH 3/4" HOSE - 25FT	  	25	37.5	21.7 x 10.2 x 21.3
FO0750330	DEF HOSE REEL WITH 3/4" HOSE - 50F	  	50	52.9	21.7 x 10.2 x 21.3

# DEF NOZZLES


## SB325\_X METERED NOZZLES



 **UP TO 12 GPM**  
 **OPERATING PRESSURE: 50 PSI**


### BREAK-AWAY SYSTEM

In the event that a vehicle accidentally drives away with the nozzle still in the tank, the spout is designed to detach from the nozzle. This system allows for a quick repair by merely fitting a new spout onto the nozzle.

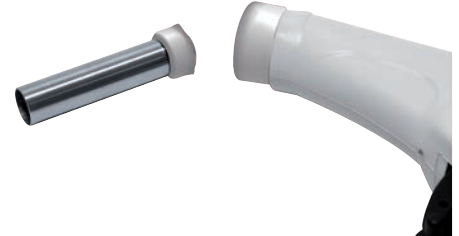

### MIS-FILLING SPOUT KIT

Transform a standard SB325\_X nozzle into a SB325\_X Mis-Filling System by simply fitting a different spout onto the nozzle and inserting the tank adapter. This feature prevents you from having a misfill into the DEF tank.

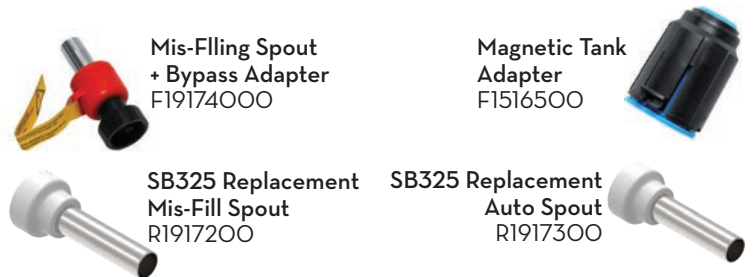

## A60 AUTOMATIC NOZZLE


















 **UP TO 11 GPM**  
 **OPERATING PRESSURE: 50 PSI**

## DEF MANUAL NOZZLE



 **UP TO 20 GPM**  
 **OPERATING PRESSURE: 50 PSI**

PART #	DETAILS	FUEL TYPE	FLOW RATE	PRESSURE PSI	WEIGHT LBS	PACKAGING INCH
FO061701	SB325_X METERED NOZZLE	  	12	50	22	17.6 x 7 x 2.5
FO061700	SB325_X	  	12	50	1.5	17.6 x 7 x 2.5
FO061903	DEF A60 AUTOMATIC NOZZLE WITH SWIVEL	  	11	50	5.7	14.1 x 14.1 x 10.8
FO061902	DEF A60 AUTOMATIC NOZZLE WITHOUT SWIVEL	  	11	50	5.7	14.1 x 14.1 x 10.8
F1476100	DEF MANUAL NOZZLE	  	20	50	0.4	31.5 x 18.9 x 11.8

# METERS & PULSERS




## K24-DEF METER

The K24 meter is a easy-to-install turbine digital flow meter with a rotatable display specifically designed for diesel.

## K24-DEF PULSER





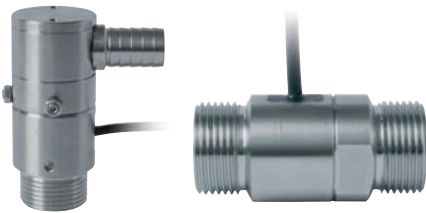
















## TURBINOX



## REMOTE DISPLAY



-  **UP TO 26 GPM**
-  **± 1% ACCURACY**
-  **OPERATING PRESSURE: 145 PSI**
-  **PULSE RATIO 1:1, 5, 10, 100**

PART #	DETAILS	FUEL TYPE	PRESSURE PSI	FLOW RATE	WEIGHT LBS	PACKAGING INCH
FOO40734	K24-DEF METER	  	145	1.3 - 26.4	0.9	BLISTER
FOO40721	K24-DEF PULSER	  	145	1.3 - 26.4	0.9	4.5 x 3 x 5.3
FOO42000	TURBINOX PULSE METER	  	290	2.6 - 10.6	1.1	3.1 x 3.1 x 3
FOO49503	REMOTE DISPLAY	     	-	-	2.6	8.9 x 4.9 x 5.9

# TANK MONITORING

## OCIO 2.0
























With it's new design, OCIO 2.0 is the upgraded version of the tank level indicator compatible with SSM 2.0 and MCO 2.0 systems. It requires a LAN or Wi-Fi connection to communicate with the software. It maintains all the performances of the standard OCIO. Thanks to its interchangeable probe, OCIO 2.0 is compatible with several fluids.

-  **MAX TANK HEIGHT: 13'**
-  **MAX TUBE LENGTH: 164'**
-  **UP TO 30 cSt**
-  **± 1% ACCURACY**

## OCIO



PART #	DETAILS	FUEL TYPE	VISCOSITY cSt	POWER WATT	WEIGHT LBS	PACKAGING INCH
FOO75515	OCIO LEVEL INDICATOR	  	UREA	20	4.8	11.8 x 16.1 x 13.9
FOO75523	OCIO LEVEL INDICATOR 2.0 - LAN	     	UP TO 30	20	4.8	11.8 x 16.1 x 13.9
FOO75524	OCIO LEVEL INDICATOR 2.0 - WIFI	     	UP TO 30	20	4.8	11.8 x 16.1 x 13.9
FOO75525	OCIO LEVEL INDICATOR 2.0 - RS-485	     	UP TO 30	20	4.8	11.8 x 16.1 x 13.9

# ACCESSORIES



## COUPLINGS, FITTINGS, & FILTERS

PART #	DESCRIPTION					
F15484000	HOSETAIL 90° 1" BSP-F TO 3/4" BARB					
F15485000	HOSETAIL 90° 1" BSP-M TO 3/4" BARB					
F15179000	SWIVEL 1" BSP-M/F PLASTIC					
F16433000	FITTING 90° 1" BSP-F TO 1" BSP-F					
F16434000	FITTING STRAIGHT 1" BSP-F TO 1" BSP-F					
F16435000	HOSETAIL STRAIGHT 1" BSP-F TO 3/4" BARB					
F15522000	HOSETAIL STRAIGHT 1" BSP-M TO 3/4" BARB					
F15176000	NIPPLE M 1" BSP / M 1" BSP PLASTIC					
F13800000	CLAMP KIT 25-35-12 SS AISI304 (10 PCS)					
F14132000	SWIVEL STAINLESS 3/4" BSP-M X 3/4" BARB					
R18188000	EXTERNAL DEF HOSE REEL FITTING					
R1819400A/R18194000	INTERNAL DEF HOSE REEL FITTING					
F16074000	SOCKET ADAPTOR KIT 1"NPT/NPT (20 PCS) SS					
F16458000	ADAPTOR SS 1"NPT-F X 1"BSP-F (20 PCS)					
F16073000	ADAPTOR SS 1"BSP-F X 1"BSP-F (20 PCS)					
FOO611D30	PIUSI 3D FILTER FILTER + HOUSING					
FOO611D40	PIUSI 3D FILTER CARTRIDGE REPLACEMENT					




## IBC ACCESSORIES

PART #	DESCRIPTION					
F1891000A	PIUSI DEF COUPLER PDC					
F15517010	SUZZARABLU GRAVITY KIT 2"NPT-F (MANUAL)					
F15606020	SUCTION HOSE WITH PLUG HEAD 2" BSP					
F15606000	DEF DISPENSE HOSE EPDM 3/4" ID 1.5FT					
F15515020	BOTTOM CONNECTION KIT 2"NPT-F X 3/4" BARB					
F20437000	6" IBC DUAL BUNG COVER					
F20226000	6" IBC COVER W/ 2" BUTTRESS (BLUE)					
F1536000	MICROMATIC RSV COUPLER					
F20436000	MICROMATIC RPV COMPOSITE COUPLER					
F17139000	REFILL COUPLER RSV 4-PIN (744-026) 35GPM					
F17137000	CONTAINER VALVE RSV 2.5" X 5 B (743-097)					
F18229000	DOWN TUBE RSV 49" (743-236)					
F16477000	EPV COUPLER SS 3A EPDM 3/4" HOSE BARB					
F16989000	EPV CONTAINER VALVE					
F16990000	EPV DOWN TUBE					








## HOSES

PART #	DESCRIPTION		
F1412400B	DEF SUCTION HOSE ROLL EPDM 3/4"ID (50FT)		
F19286000	SUCTION HOSE 5' 1" BSP-F CRIMPED		
F1907200A	DELIVERY HOSE 20' 1" BSP-F CRIMP -THREE25		
F1412505A	DEF DISPENSE HOSE ROLL EPDM 3/4"ID 164FT		
F1928600	DELIVERY HOSE 5' 1" BSP-F CRIMPED		

## ROTARY HAND PUMP ACCESSORIES

PART #	DESCRIPTION			
F20556000	PDC COUPLER W/ LATCH (ROTARY HAND PUMP)			
F20195000	PDC-ROTARY HAND PUMP ADAPTER KIT			
R19759000	DEF HAND PUMP CRIMPED DELIVERY HOSE			
		F20437000	F20226000	F1536000

## NOZZLE ACCESSORIES

PART #	DESCRIPTION					
F19174000	SB325 MISFILL SPOUT W/ BYPASS ADAPTOR					
F15165000	MAGNETIC TANK ADAPTOR FOR MISFILL SPOUT					
F1840000	SB325 MAGNETIC BYPASS ADAPTOR (RED)					
F16475000	ADAPTOR K24 TO AUTO3/4" BSP-M TO 1" BSP-F					
R1917200A	SB325 REPLACEMENT MIS-FILL SPOUT					
R1917300A	SB325 REPLACEMENT AUTO SPOUT					
F15776000	SWIVEL 1" BSP -M/F PLASTIC MANUAL NOZZLE					
F16497000	RUBBER PROTECTOR FOR HOSE 3/4"					

DEF

*SINCE 1953, PIUSI HAS BEEN EMPLOYING ITALIAN ENGINEERING  
SKILLS AT THE SERVICE OF ITS CUSTOMERS, WITH  
PROFESSIONALISM AND INTEGRITY IN ORDER TO BUILD STABLE  
AND LASTING RELATIONSHIPS.*

*OUR MISSION IS TO PROVIDE SIMPLE, INTELLIGENT AND  
PROFESSIONAL SOLUTIONS FOR THE TRANSFER, DISPENSE AND  
MEASUREMENT OF LUBRICANTS, FUELS AND LIQUIDS, WITH THE  
HIGHEST CONSIDERATION FOR HUMAN AND ENVIRONMENTAL  
HEALTH.*



*PIUSI S.p.A.  
Headquarters  
46029 Suzzara (Mantova) Italy  
tel.+39 0376 534561  
fax.+39 0376 536393  
e-mail: [piusi@piusi.com](mailto:piusi@piusi.com)  
[www.piusi.com](http://www.piusi.com)*



PIUSI 中国地区代理  
北京众智同创科技有限公司  
地址：北京市密云区西大桥路67号  
电话：+86 010 53652003  
传真：+86 010 53652004  
电子邮箱：[sales@zztc-china.com](mailto:sales@zztc-china.com)  
网址：[www.zztc-china.com](http://www.zztc-china.com)